



»» **DATA SHEET**

(DOC No. HX8353-C(N)-DS)

»» **HX8353-C**

132RGB x 162 dot, 262K Color,
with Internal GRAM,
TFT Mobile Single Chip Driver

Preliminary version 01, February 2008

List of Contents

February, 2008

1. General Description.....	8
2. Features.....	9
3. Block Diagram.....	11
4. Pin Description	12
4.1 Pin Description	12
4.2 Pin assignment.....	16
4.4 Alignment mark.....	21
4.5 Bump arrangement.....	22
5. Function Description.....	23
5.1 System Interface.....	23
5.1.1 Parallel Bus System Interface.....	24
5.1.2 Serial Interface	39
5.1.3 Display Module Data Transfer Recovery	45
5.1.4 Display Module Data Transfer Pause	46
5.1.5 Display Module Data Transfer Modes	47
5.2 Address Counter (AC)	47
5.2.1 MCU to memory write/read direction	48
5.3 Source, Gate and Memory Map	50
5.3.1 When using 132 x 162 GRAM resolution, display resolution 132RGB x 162 and support S45AP spec (RSO[2:0]=3'b000 & STE_SEL=0)	50
5.3.2 When using 132 x 162 GRAM resolution, display resolution 128RGB x 160 and support S43AP spec (RSO[2:0]=3'b000 & STE_SEL=1)	51
5.3.3 When using 128 x 160 GRAM resolution, display resolution 128RGB x 160 and support S44AP spec (RSO[2:0]=3'b011)	52
5.3.4 When using 120 x 160 GRAM resolution, display resolution 120RGB x 160 (RSO[2:0]=3'b010)	53
5.3.5 When using 128 x 128 GRAM resolution, display resolution 128RGB x 128 (RSO[2:0]=3'b001)	54
5.3.6 When using 96 x 68 GRAM resolution, display resolution 96RGB x 68 (RSO[2:0]=3'b100) ...	55
5.3.7 When using 96 x 64 GRAM resolution, display resolution 96RGB x 64 (RSO[2:0]=3'b101) ...	56
5.3.8 Normal Display On or Partial Display On	57
5.4 Vertical Scrolling Display	71
5.5 Tearing Effect Output Line	73
5.5.1 Tearing Effect Line Modes.....	73
5.5.2 Tearing Effect Line Timing.....	75
5.5.3 Example 1: MPU Write is faster than Panel Read	76
5.5.4 Example 2: MPU Write is slower than Panel Read.....	77
5.6 Color Depth Conversion Look-up Tables.....	78
5.7 Oscillator.....	82
5.8 Source Driver.....	82
5.9 Gate Driver	82
5.10 LCD POWER GENERATION CIRCUIT	83
5.10.1 LCD Power Generation Scheme.....	83
5.10.2 Various Boosting Steps	84
5.11 Gray Voltage Generator for Source Driver	85
5.11.1 Structure of Grayscale Voltage Generator	86
5.11.2 Gamma-Characteristics Adjustment Register	87
5.11.3 Gamma Macro Adjustment Registers.....	87
5.11.4 Gamma Resister Stream and 8 to 1 Selector	88
5.11.5 Variable Resister	89
5.11.6 Gamma Curve Control	95
5.12 Oscillator.....	96
5.13 Power On/Off Sequence	97
5.13.1 Case 1 – NRESET line is hold High or Unstable by Host at Power On.....	98
5.13.2 Case 2 – NRESET line is held Low by host at Power On.....	99

List of Contents

February, 2008

5.14 Uncontrolled Power Off	100
5.15 Power Flow Chart for Different Power Mode.....	101
5.16 Input/Output Pin State	102
5.16.1 Output or Bi-directional (I/O) Pins	102
5.16.2 Input Pins	102
5.17 Sleep Out – Command and Self-Diagnostic Functions of the Display Module.....	103
5.17.1 Register loading Detection	103
5.17.2 Functionality Detection	104
5.18 OTP Programming.....	105
5.19 Free Running Mode Specification	109
6. Command	112
6.1 Command Compare Table.....	112
6.2 User Define Command List Table.....	115
6.2.1 Command List	115
6.3 Command Description	121
6.3.1 Command Description	121
6.3.1 NOP	121
6.3.2 Software Reset (01h)	122
6.3.3 Read Display Identification Information (04h)	123
6.3.4 Read Display Status (09h)	124
6.3.5 Read Display Power Mode (0Ah).....	127
6.3.6 Read Display MADCTL (0Bh)	129
6.3.7 Read Display Pixel Format (0Ch)	131
6.3.8 Read Display Image Mode (0Dh).....	132
6.3.9 Read Display Signal Mode (0Eh)	133
6.3.10 Read Display Self-Diagnostic Result (0Fh).....	134
6.3.11 Sleep In (10h)	135
6.3.12 Sleep Out (11h)	136
6.3.13 Partial Mode On (12h).....	138
6.3.14 Normal Display Mode On (13h).....	139
6.3.15 Display Inversion Off (20h).....	140
6.3.16 Display Inversion On (21h).....	141
6.3.17 Gamma Set (26h)	142
6.3.18 Display Off(28h)	143
6.3.19 Display On (29h)	144
6.3.20 Column Address Set (2Ah).....	145
6.3.21 Page Address Set (2Bh).....	147
6.3.22 Memory Write (2Ch)	148
6.3.23 Colour Set (2Dh)	149
6.3.24 Memory Read (2Eh)	150
6.3.25 Partial Area (30h)	152
6.3.26 Vertical Scrolling Definition (33h)	154
6.3.27 Tearing Effect Line Off (34h)	157
6.3.28 Tearing Effect Line On (35h)	158
6.3.29 Memory Access Control (36h)	159
6.3.30 Vertical Scrolling Start Address (37h)	161
6.3.31 Idle Mode Off (38h)	162
6.3.32 Idle Mode On (39h)	163
6.3.33 Interface Pixel Format (3Ah)	164
6.3.34 Read ID1 (DAh).....	165
6.3.35 Read ID2 (DBh).....	166
6.3.36 Read ID3 (DCh)	167
6.4 Himax Command.....	168
6.4.1 SETOSC: Set Internal Oscillator (B0h)	168

List of Contents

February, 2008

6.4.2 SETPOWER: Set Power (B1h)	169
6.4.3 SETDISP: Set Display Related Register (B2h).....	173
6.4.4 SETLUT: Set LUT Enable Related Register (B3h).....	176
6.4.5 SETCYC: Set Display Waveform Cycles (B4h)	177
6.4.6 SETBGP: Set BGP Voltage (B5h)	179
6.4.7 SETVCOM: Set VCOM Voltage (B6h)	180
6.4.8 SETGAMMA: Set Gamma Curve Related Setting (B7)	184
6.4.9 PASSWDEN: Set Password enable command (B9h)	185
6.4.10 PASSWDDISAB: Password Disable command (BAh)	186
6.4.11 SETOTP: Set OTP Related Setting (BBh)	187
6.4.12 SETVDC: Set Internal Digital Voltage (BCh).....	188
6.4.13 SETSPULSE: Set Arbiter Pulse Width (BDh)	189
6.4.14 SETPROBE: Set Probe Signal Group (BEh)	190
6.4.15 SETPTBA: Set Power Option (BFh)	191
6.4.16 SETSTBA: Set Source Option (C0h)	192
6.4.17 SETID: Set ID (C4h).....	193
6.4.18 SETECO: Set ECO (C6h)	194
6.4.19 SETMREV: Set Free Running Mode (CAh)	195
6.4.20 SETIOOPT: Set IO_OPT (CBh)	196
6.4.21 SETPANEL: Set PANEL (CCh)	196
6.4.22 GETOSC: Read Internal Oscillator (E0h)	197
6.4.23 GETPOWER: Read Power (E1h)	198
6.4.24 GETDISP: Read Display Related Register (E2h)	199
6.4.25 GETLUT: ReadLUT Enable Related Register (E3h)	200
6.4.26 GETCYC: Read Display Waveform Cycle(E4h)	201
6.4.27 GETBGP: Read BGP Voltage Setting (E5h)	202
6.4.28 GETVCOM: Read VCOM Voltage Setting (E6h)	203
6.4.29 GETGAMMA: Read Gamma Curve Related Setting (E7h)	204
6.4.30 GETOTP: Read OTP Related Setting (EBh).....	205
6.4.31 GETVDC: Read Internal Digital Voltage Setting (ECh).....	206
6.4.32 GETSPULSE: Read Arbiter Pulse Width (EDh).....	207
6.4.33 GETPROBE: Read Probe Signal Group (EEh).....	208
6.4.34 GETPTBA: Read Power Option (EFh).....	209
6.4.35 GETSTBA: Read Source Option (F0h)	210
6.4.36 GETPFUSE: Get Internal OTP (F1h)	211
6.4.37 GETHXID: Read Himax ID (F4h)	212
6.4.38 GETECO: Read TECO(F6h)	213
6.4.39 GETMREV: Get Free Running Mode (FAh)	214
6.4.40 GETIOOPT: Get IO_OPT (FBh)	215
6.4.41 GETPANEL: Get PANEL (FCh)	215
7. Electrical Characteristic.....	216
7.1 Absolute Maximum Ratings	216
7.2 ESD Protection Level	216
7.3 Maximum Series Resistance	216
7.4 DC Characteristics	217
7.4.1 DC Characteristics List.....	217
7.4.2 Current Consumption	218
7.5 AC CHARACTERISTICS.....	219
7.5.1 Parallel Interface Characteristics (8080-series MPU).....	219
7.5.2 Serial Interface Characteristics	221
7.5.3 Reset Input Timing	222
7.5.4 Measurement Conditions	223
8. Reference Application.....	227
8.1 Example Connection with Panel.....	227
8.2 Connection Example with External Components	228

>> HX8353-C

132RGB x 162 dot, 262K Color, with Internal
GRAM, TFT Mobile Single Chip Driver



Himax Technologies, Inc.
<http://www.himax.com.tw>

List of Contents

February, 2008

8.3 External Components	229
9. Layout Recommedacation	230
10. Ordering Information	231
11. Revision History	231

Himax Confidential
For Do Not Copy Only

List of Figures

February, 2008

Figure 5. 1 Register Read/Write Timing in Parallel Bus System Interface (for I80 series MPU)	25
Figure 5. 2 Register Read/Write Timing in Parallel Bus System Interface (for M68 series MPU)	26
Figure 5. 3 GRAM Read/Write Timing in Parallel Bus System Interface (for I80 series MPU).....	27
Figure 5. 4 GRAM Read/Write Timing in Parallel Bus System Interface (for M68 series MPU).....	28
Figure 5. 5 Example of 80- / 68- System 8-bit bus Interface	29
Figure 5. 6 Write data for RGB 6-6-6-bits input (support DMIF-S43AP-J124 and LUT_EN=1)	30
Figure 5. 7 Write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)	31
Figure 5. 8 Write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)	32
Figure 5. 9 Example of I80- / M68- System 16-bit Parallel Bus Interface	33
Figure 5. 10 GRAM Write Data for RGB 6-6-6-(262k colours) bits input (LUT_EN=1).....	33
Figure 5. 11 Write data for RGB 4-4-4 (4k colours) bits input on 16-bit parallel Interface (when support Look-up table and LUT_EN=0)	34
Figure 5. 12 Write data for RGB 5-6-5 (65k colours) bits input on 16-bit parallel Interface (when support Look-up table and LUT_EN=0)	34
Figure 5. 13 Example of I80- / M68- System 18-bit Parallel Bus Interface	35
Figure 5. 14 Write data for RGB 4-4-4 (4k colours) bits input in 18-bit parallel Interface (when support Look-up table and LUTENB=0).....	35
Figure 5. 15 Write data for RGB 5-6-5 (65k colours) bits input in 18-bit parallel Interface (when support Look-up table and LUT_EN=0)	36
Figure 5. 16 Write data for RGB 6-6-6(262k colours) bits input in 18-bit parallel Interface (LUT_EN=1)	36
Figure 5. 17 Example of 80- / 68- System 9-bit bus Interface	37
Figure 5. 18 Write data for RGB 4-4-4 (4k colours) bits input in 9-bit parallel Interface (when support Look-up table and LUT_EN=0)	37
Figure 5. 19 Write data for RGB 5-6-5(65k colours) bits input in 9-bit parallel Interface (when support Look-up table and LUT_EN=0)	38
Figure 5. 20 Write data for RGB 6-6-6-bits (262kcolours) input in 9-bit parallel Interface (LUT_EN=1)	38
Figure 5. 21 Serial Interface protocol data stream format.....	39
Figure 5. 22 Serial Interface protocol 3 wire/4 wire, write mode.....	40
Figure 5. 23 3 Wires Serial Interface protocol, read mode	41
Figure 5. 24 4 wire Serial Interface protocol, read mode	42
Figure 5. 25 3W Serial write data for RGB (6-6-6) bits input (LUT_EN=1)	43
Figure 5. 26 3W Serial write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)	43
Figure 5. 27 3W Serial write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)	43
Figure 5. 28 4W Serial write data for RGB (6-6-6) bits input (LUT_EN=1)	44
Figure 5. 29 4W Serial write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)	44
Figure 5. 30 4W Serial write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)	44
Figure 5. 31 Display Module Data Transfer Recovery	45
Figure 5. 32 MCU to memory write/read direction	48
Figure 5. 33 MY, MX, MV Setting.....	48
Figure 5. 34 Address Direction Settings.....	49
Figure 5. 35 Memory Map, 132 x 162 GRAM resolution, display resolution 132RGB x 162.....	50
Figure 5. 36 Memory Map, 132 x 162 GRAM resolution ,display resolution 128RGB x 160.....	51
Figure 5. 37 Memory Map, 128 x 160 GRAM resolution, display resolution 128RGB x 160.....	52
Figure 5. 38 Memory Map, 120 x 160 GRAM resolution, display resolution 120RGB x 160.....	53
Figure 5. 39 Memory Map, 128 x 128 GRAM resolution, display resolution 128RGB x 128.....	54
Figure 5. 40 Memory Map, 96 x 68 GRAM resolution, display resolution 96RGB x 68	55
Figure 5. 41 Memory Map, 96 x 64 GRAM resolution, display resolution 96RGB x 64	56
Figure 5. 41	71
Figure 5. 43	72

List of Figures

February, 2008

Figure 5. 44	72
Figure 5. 45	73
Figure 5. 46	74
Figure 5. 47	74
Figure 5. 48	75
Figure 5. 49	75
Figure 5. 50	76
Figure 5. 51	76
Figure 5. 52	77
Figure 5. 53 LCD power generation scheme	83
Figure 5. 54 Block Diagram of Power Supply Circuit.....	84
Figure 5. 55 Grayscale Control	85
Figure 5. 56 Structure of Grayscale Voltage Generator.....	86
Figure 5. 57 Gamma Resister Stream and Gamma Reference Voltage	88
Figure 5. 58 Relationship between Source Output and Vcom.....	94
Figure 5. 59 Relationship between GRAM Data and Output Level	94
Figure 5. 60 Gamma Curve according to the GC0 to GC3 bit (GC_SEL=low)	95
Figure 5. 61 Oscillation Circuit	96
Figure 5. 62 Case 1 – NRESET line is hold High or Unstable by Host at Power On.....	98
Figure 5. 63 NRESET line is held Low by host at Power On	99
Figure 5. 64 Power Flow Chart for Different Power Modes	101
Figure 5. 65 Register loading Detection Flow	103
Figure 5. 66 Functionality Detection Flow	104
Figure 5. 67 OTP Programming Flow	107
Figure 5. 68 Power On Sequence of FR-mode (for Normally–White Panel)	110
Figure 5. 69 Power Off Sequence of FR-mode.....	110
Figure 7. 1 Parallel Interface characteristics (8080-series MPU)	219
Figure 7. 2 Chip select timing.....	220
Figure 7. 3 Write to read and read to write timing.....	220
Figure 7. 4 Serial Interface Characteristics	221
Figure 7. 5 Reset input timing	222
Figure 7. 6	223
Figure 7. 7	223
Figure 7. 8	224
Figure 7. 9	225
Figure 7. 10	225
Figure 7. 11	226
Figure 8. 1	227
Figure 8. 2 Example connection with external components.....	228

List of Tables

February, 2008

Table 5. 1 Interface selection	23
Table 5. 2 Interface Mode Selection.....	23
Table 5. 3 Data Pin Function for I80 Series CPU.....	24
Table 5. 4 Data Pin Function for M68 Series CPU.....	24
Table 5. 5 MY, MX, MV Setting	48
Table 5. 6.....	57
Table 5. 7	58
Table 5. 8.....	59
Table 5. 9.....	60
Table 5. 10.....	61
Table 5. 11	62
Table 5. 12.....	63
Table 5. 13.....	64
Table 5. 14.....	65
Table 5. 15.....	66
Table 5. 16.....	67
Table 5. 17.....	68
Table 5. 18.....	69
Table 5. 19.....	70
Table 5. 20 AC characteristics of Tearing Effect Signal.....	75
Table 5. 21 Gamma-Adjustment Registers	87
Table 5. 22 Offset Adjustment 0 Table 5. 23 Offset Adjustment 1	89
Table 5. 24 Center Adjustment.....	89
Table 5. 25 Output Voltage of 8 to 1 Selector	90
Table 5. 26 Voltage Calculation Formula	91
Table 5. 27 Voltage Calculation Formula of Grayscale Voltage.....	92
Table 5. 28 Voltage Calculation Formula of Grayscale Voltage V2~V7 and V56~V61.....	93
Table 5. 29 The State of Output or Bi-directional (I/O) Pins	102
Table 5. 30 The State of Input Pins	102
Table 5. 31 OTP memory table.....	105
Table 5. 32 Pin Information	109
Table 5. 33 Frequency Definition of Free Running Mode Display.....	111
Table 6. 1 MPU Interface Command Set	112
Table 6. 2 User Command Set.....	115
Table 7. 1 Absolute Maximum Ratings.....	216
Table 7. 2 ESD Protection Level	216
Table 7. 3.....	216
Table 7. 4 DC Characteristics 1	217
Table 7. 5 DC Characteristics 2.....	217
Table 7. 6 Current Consumption	218
Table 7. 7 Parallel Interface characteristics (8080-series MPU)	219
Table 7. 8 Serial Interface Characteristics	221
Table 7. 9	222
Table 8. 1 Example capacitor connection.....	229
Table 8. 2 Adoptability of Capacitor.....	229
Table 8. 3 Adoptability of Variable resistor	229

>> HX8353-C

132RGB x 162 dot, 262K Color, with Internal
GRAM, TFT Mobile Single Chip Driver



Himax Technologies, Inc.
<http://www.himax.com.tw>

Preliminary Version 01

February, 2008

1. General Description

This manual describes the Himax's HX8353-C 132RGB*162 dots resolution driving controller. The HX8353-C(N) is designed to provide a single-chip solution that combined a gate driver, a source driver, power supply circuit, and internal graphics RAM for 262,144 colors to drive a TFT panel with 128RGB*160 dots at maximum.

The HX8353-C can be operated in low-voltage (1.65V) condition to the interface and integrated internal boosters that produce the liquid crystal voltage, breeder resistance and the voltage follower circuit for liquid crystal driver. In addition, The HX8353-C also supports various functions to reduce the power consumption of a LCD system via software control.

The HX8353-C is suitable for any small portable battery-driven product and requiring long-term driving capabilities, such as small PDAs, digital cellular phones and bi-directional pagers.

Himax Confidential
For Tianma
DO NOT COPY

2. Features


- Single chip solution to drive a TFT panel
- 132RGB x 162-dot graphics display LCD controller/driver and 262,144 TFT colors
- Support resolution:
 - 132RGB x 162-dot: Display with 132 x 18-bits x 162 display RAM (S45AP)
 - 128RGB x 160-dot
 - Type 1: Display with 128 x 18-bits x 160 display RAM (S44AP)
 - Type 2: Display with 132 x 18-bits x 162 display RAM (S43AP)
 - 128RGB x 128-dot
 - 120RGB x 160-dot
 - 96RGB x 68-dot: Display with 96 x 18-bits x 68 display RAM (S31AL)
 - 96RGB x 64-dot
- Internal operation circuit of liquid crystal display:
 - Source channel: 396ch (132RGB)
 - Gate line: 162 Gate output
- Display mode (Color modes):
 - Full colors
 - 262k colours (18bit 6(R):6(G):6(B))
 - Reduce color mode:
 - 65k colours (16bit 5(R):6(G):5(B))
 - 4k colours (12bit 4(R):4(G):4(B))
 - 8 colors (Idle mode on): 8 colors (3 bit binary mode)
- Internal graphics RAM capacity: 132 x 162 x 18-bit = 0.38M bit:
- Support interface mode:
 - I80 System interface: 8-bits / 9-bits / 16-bits / 18bits bus
 - m68 System interface: 8-bits / 9-bits / 16-bits / 18bits bus
 - 3W/4W Serial Data Transfer Interface
- Display features
 - Area scrolling
 - Partial display mode
 - Software programmable color depth mode
- On chip features:
 - DC/DC converter
 - OTP to store initialization register setting
 - Oscillator for display clock generation

- Line inversion, frame inversion
- OTP to store initialization register setting
- Support default value for factory use
- Low-power consumption architecture supports:
 - Logic supply voltage range for VDD to VSSD: 1.65 to 3.3V
 - Analog supply voltage range for VDDI to VSSA: 2.3 to 3.3V
- Output voltage range:
 - VLCD = 4.0 to 5.5V
 - VCL = -2V to -3.3V
 - VREG1OUT = 3.0 to (VLCD-0.5V) (Source output reference voltage range)
 - **VCOMH = 2.5V to 4.5V (Common electrode output high voltage)**
 - **VCOML = -2V to 0V (Common electrode output low voltage)**
 - VGH = +9.0 to +16V (Positive Gate output voltage range)
 - VGL = -9.0 to -16V (Negative Gate output voltage range)
(note: VDD – VCL \leq 6V, VGH – VGL \leq 32V)
- Low power consumption, suitable for battery operated systems
- Suitable for all brand LCM module
- Command set:
 - 128RGB x 160-dot : DMIF-S43AP-J124 but support LUT table
 - 132RGB x 162-dot : DMIF-S45AP-J12
 - 128RGB x 160-dot : DMIF-S44AP-J12
 - 96RGB x 68-dot : DMIF-S31AL-J124 but support LUT table
- Himax defined command set
- CMOS compatible inputs
- Optimized layout for COG assembly
- OTP memory to store initialization register settings
- Temperature range: -30 ~ 85°C

Note: (1) Blank display means: Normal White Display = White, Normal Black Display = Black.

(2) Timing and voltage level specification apply for the complete display module including LCD glass, Flex cable (FPC) and driver IC. Signal timings and levels are measured on the host interface connector.

3. Block Diagram

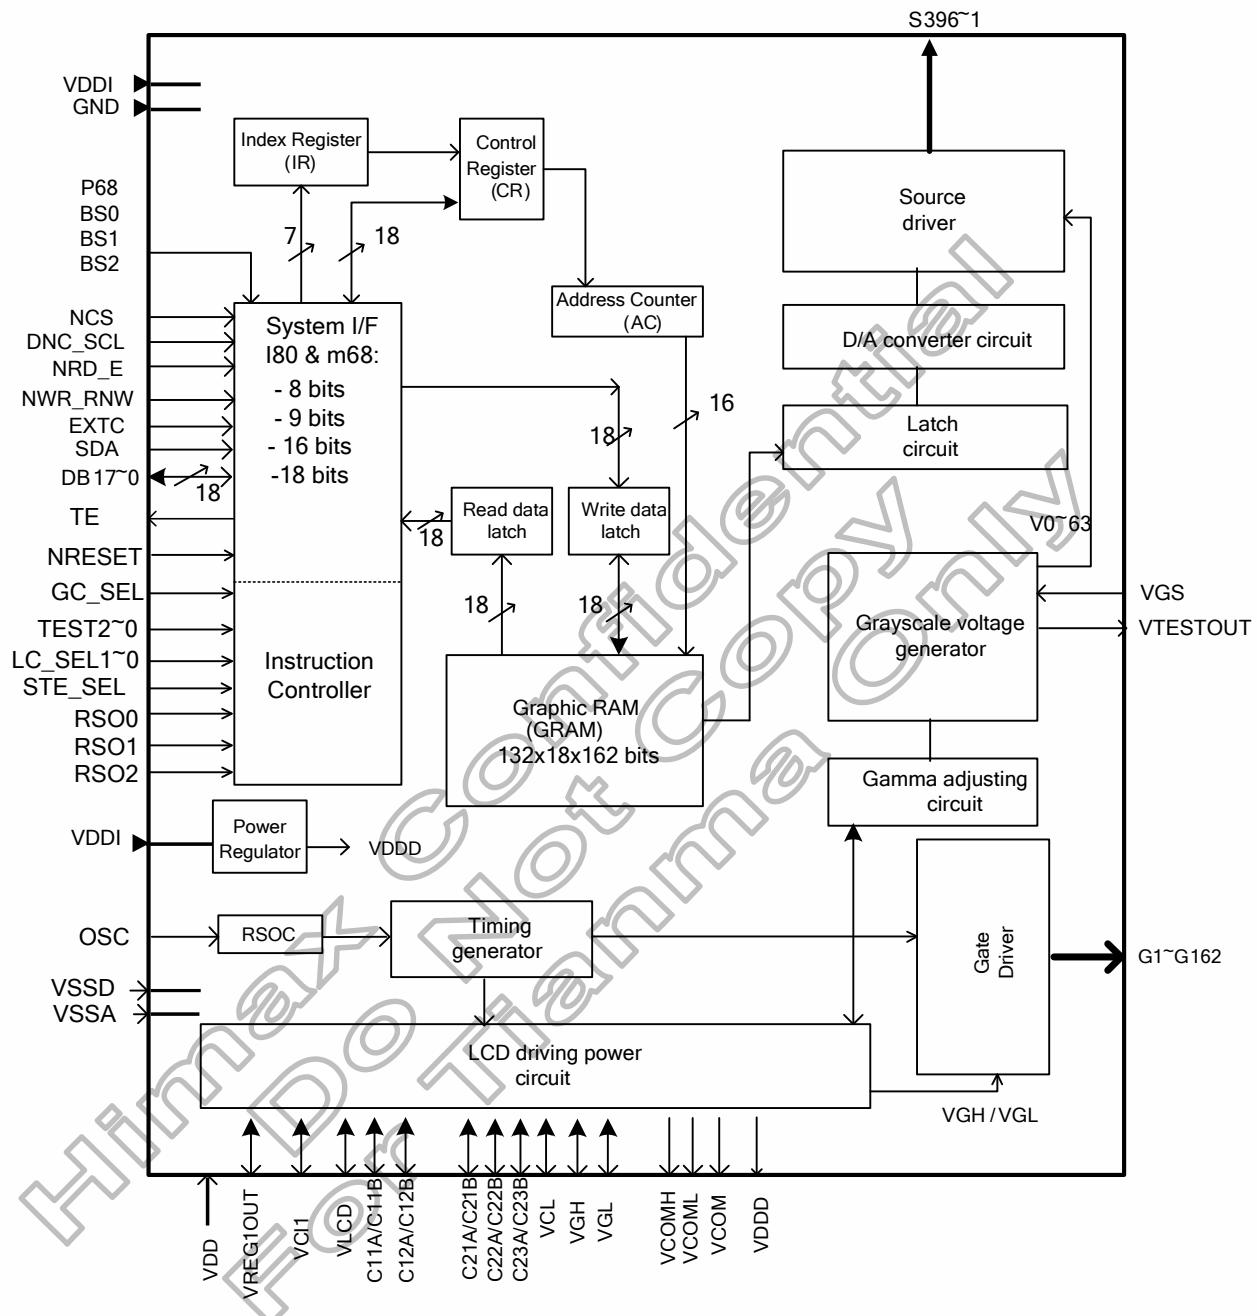

4. Pin Description

4.1 Pin Description

Input Parts												
Signals	I/O	Pin Number	Connected with	Descriptions								
P68, BS2,BS1,BS0	I	4	VSSD/ VDDI	Select the MPU interface mode as listed below								
				P68	BS2	BS1	BS0	Interface mode	DB pins			
				0	1	0	0	8-bit bus interface, 80-system,	D17-D8:Unused, D7-D0: Data			
				0	1	0	1	16-bit bus interface, 80-system,	D17-D16:Unused, D15-D0: Data			
				0	1	1	0	9-bit bus interface, 80-system,	D17-D9:Unused, D8-D0: Data			
				0	1	1	1	18-bit bus interface, 80-system,	D17-D0: Data			
				1	1	0	0	8-bit bus interface, 68-system,	D17-D8:Unused, D7-D0: Data			
				1	1	0	1	16-bit bus interface, 68-system,	D17-D16:Unused, D15-D0: Data			
				1	1	1	0	9-bit bus interface, 68-system,	D17-D9:Unused, D8-D0: Data			
				1	1	1	1	18-bit bus interface, 68-system,	D17-D0: Data			
				x	0	x	x	3W/4W Serial interface	D17-D0:Unused SDA: Data input/output			
Note:Must be connected to VSSD or VDD1.(latch type)												
SPI_SEL	I	1	MPU	Interface format select pin (latch type)								
				SPI_SEL	Serial Interface Format Selection							
NCS	I	1	MPU	0 3W Serial Interface (default)								
				1	4W Serial Interface							
DNC_SCL	I	1	MPU	Chip select signal. Low: chip can be accessed; High: chip cannot be accessed.								
				Must be connected to VSSD or VDD1 if not in use. (latch type)								
NRD_E	I	1	MPU	The signal for command or parameter select under parallel mode(i.e. Not serial interface): Low: command. High: parameter. When under serial interface, it servers as SCL.								
				If not used, let it open or connected to VDD1. (latch type)								
NWR_RNW	I	1	MPU	I80 system: Serves as a read signal and read data at the low level. M68 system: 0: Read/Write disable, 1: Read/Write enable. Fix it to VDDI or VSSD level when using serial interface. (latch type)								
				I80 system: Serves as a write signal and writes data at the rising edge. M68 system: 0: Write, 1: Read. Fix it to VDDI or VSSD level when using serial interface.								
EXTC	I	1	MPU	If not used, let it open or connected to VSSD.(weak pull low)								
				Extended command set enable. (Only support Command-Parameter Interface mode) Low (VSSD): extended command set is discarded High (VDDI): extended command set is accepted								
STE_SEL	I	1	MPU	This Pin is only valid for RSO[2:0]=3'b000. There is a internal pull-high resistor on this pad. (latch type)								
				Low (VSSD): Scrolling function enable and TE lines is meet definition of S45AP (162 lines) → Support document of S45AP. High (VDDI): Scrolling function disable and TE lines is meet definition of S43AP (160 lines) → Support document of S43AP.								
GC_SEL	I	1	MPU	This signal is used to select gamma curve order. (latch type)								
				Low (VSSD): GC0(1.0), GC1(2.5), GC2(2.2), GC3(1.8) High (VDDI): GC0(2.2), GC1(1.8), GC2(2.5), GC3(1.0)								
LC_SEL1-0	I	2	MPU	The selection pins of different liquid crystal type. (latch type)								
				LC_SEL1	LC_SEL0	Different liquid crystal type Selection						
				0	0	LC type 1						
				0	1	LC type 2						

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

-P.12-

February, 2008

Input Parts																																								
			1	0																																				
			1	LC type 3																																				
			1	LC type 4																																				
Input Parts																																								
Signals	I/O	Pin Number	Connected with	Description																																				
RSO0	I	1	MPU	Resolution selection pins. RSO[2:0] is used for selecting resolution. If not used, please let it open. (latch type)																																				
RSO1	I	1	MPU	<table border="1"> <thead> <tr> <th>RSO2</th> <th>RSO1</th> <th>RSO0</th> <th>Resolution</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>GRAM resolution (Size): 132RGBx162 Display resolution: Type1 :132RGBx162 (S1~S396 and G1~G162) → S45AP Type2 :128RGBx160 (S7~S390 and G2~G161) → S43AP</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>GRAM resolution (Size): 128RGBx128 Display resolution: 128RGBx128 (S7~S390 and G2~G129)</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>GRAM resolution (Size): 120RGBx160 Display resolution: 120RGBx160 (S7~S366, G2~G161)</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>GRAM resolution (Size): 128RGBx160 Display resolution: 128RGBx160 (S7~S390 and G2~G161) → S44AP</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>GRAM resolution: 96RGBx68 Display resolution: 96RGBx68 (S55~S342, G1~G68)</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>GRAM resolution: 96RGBx64 Display resolution: 96RGBx64 (S55~S342, G1~G64)</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>Setting disable</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> <td>Setting disable</td> </tr> </tbody> </table>	RSO2	RSO1	RSO0	Resolution	0	0	0	GRAM resolution (Size): 132RGBx162 Display resolution: Type1 :132RGBx162 (S1~S396 and G1~G162) → S45AP Type2 :128RGBx160 (S7~S390 and G2~G161) → S43AP	0	0	1	GRAM resolution (Size): 128RGBx128 Display resolution: 128RGBx128 (S7~S390 and G2~G129)	0	1	0	GRAM resolution (Size): 120RGBx160 Display resolution: 120RGBx160 (S7~S366, G2~G161)	0	1	1	GRAM resolution (Size): 128RGBx160 Display resolution: 128RGBx160 (S7~S390 and G2~G161) → S44AP	1	0	0	GRAM resolution: 96RGBx68 Display resolution: 96RGBx68 (S55~S342, G1~G68)	1	0	1	GRAM resolution: 96RGBx64 Display resolution: 96RGBx64 (S55~S342, G1~G64)	1	1	0	Setting disable	1	1	1	Setting disable
RSO2	RSO1	RSO0	Resolution																																					
0	0	0	GRAM resolution (Size): 132RGBx162 Display resolution: Type1 :132RGBx162 (S1~S396 and G1~G162) → S45AP Type2 :128RGBx160 (S7~S390 and G2~G161) → S43AP																																					
0	0	1	GRAM resolution (Size): 128RGBx128 Display resolution: 128RGBx128 (S7~S390 and G2~G129)																																					
0	1	0	GRAM resolution (Size): 120RGBx160 Display resolution: 120RGBx160 (S7~S366, G2~G161)																																					
0	1	1	GRAM resolution (Size): 128RGBx160 Display resolution: 128RGBx160 (S7~S390 and G2~G161) → S44AP																																					
1	0	0	GRAM resolution: 96RGBx68 Display resolution: 96RGBx68 (S55~S342, G1~G68)																																					
1	0	1	GRAM resolution: 96RGBx64 Display resolution: 96RGBx64 (S55~S342, G1~G64)																																					
1	1	0	Setting disable																																					
1	1	1	Setting disable																																					
NRESET	I	1	MPU or reset circuit	Reset pin. Setting this pin low initializes the LSI. Must be reset after power is supplied. Must be connected to VSSD or VDD1. (latch type)																																				
VDC_ENB				<p>Input pin to select the logic power. (latch type) VSSD : Enable internal VDDD generator VDDI : Disable internal VDDD generator, VDDD should connect to external 1.65v~1.95v power</p>																																				
SS_PANEL	I	1	MPU	<p>Input pin to select the source driver scan direction on panel module. (1: VDDI, 0: VSSD) (latch type)</p> <table border="1"> <thead> <tr> <th rowspan="2">SS_Panel</th> <th colspan="4">Module source output direction</th> </tr> <tr> <th>RSO[2:0] =3b'011</th> <th>RSO[2:0] =3b'010</th> <th>RSO[2:0] =3b'001</th> <th>RSO[2:0] =3b'000</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>S7 → S390</td> <td>S7 → S366</td> <td>S7 → S390</td> <td>S1 → S396</td> </tr> <tr> <td>1</td> <td>S390 → S7</td> <td>S366 → S7</td> <td>S390 → S7</td> <td>S396 → S1</td> </tr> </tbody> </table>	SS_Panel	Module source output direction				RSO[2:0] =3b'011	RSO[2:0] =3b'010	RSO[2:0] =3b'001	RSO[2:0] =3b'000	0	S7 → S390	S7 → S366	S7 → S390	S1 → S396	1	S390 → S7	S366 → S7	S390 → S7	S396 → S1																	
SS_Panel	Module source output direction																																							
	RSO[2:0] =3b'011	RSO[2:0] =3b'010	RSO[2:0] =3b'001	RSO[2:0] =3b'000																																				
0	S7 → S390	S7 → S366	S7 → S390	S1 → S396																																				
1	S390 → S7	S366 → S7	S390 → S7	S396 → S1																																				
GS_PANEL	I	1	MPU	<p>Input pin to select the Gate driver scan direction on panel module. (1: VDDI, 0: VSSD) (latch type)</p> <table border="1"> <thead> <tr> <th rowspan="2">GS_Panel</th> <th colspan="4">Module Gate output direction</th> </tr> <tr> <th>RSO[2:0] =3b'011</th> <th>RSO[2:0] =3b'010</th> <th>RSO[2:0] =3b'001</th> <th>RSO[2:0] =3b'000</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>G2 → G161</td> <td>G2 → G161</td> <td>G2 → G129</td> <td>G1 → G162</td> </tr> <tr> <td>1</td> <td>G161 → G2</td> <td>G161 → G2</td> <td>G129 → G2</td> <td>G162 → G1</td> </tr> </tbody> </table>	GS_Panel	Module Gate output direction				RSO[2:0] =3b'011	RSO[2:0] =3b'010	RSO[2:0] =3b'001	RSO[2:0] =3b'000	0	G2 → G161	G2 → G161	G2 → G129	G1 → G162	1	G161 → G2	G161 → G2	G129 → G2	G162 → G1																	
GS_Panel	Module Gate output direction																																							
	RSO[2:0] =3b'011	RSO[2:0] =3b'010	RSO[2:0] =3b'001	RSO[2:0] =3b'000																																				
0	G2 → G161	G2 → G161	G2 → G129	G1 → G162																																				
1	G161 → G2	G161 → G2	G129 → G2	G162 → G1																																				
REV_PANEL	I	1	MPU	<p>Input pin to select the display reversion (1: VDDI, 0: VSSD) (latch type)</p> <table border="1"> <thead> <tr> <th rowspan="2">REV_Panel</th> <th colspan="2">Mapping data</th> </tr> <tr> <th>0</th> <th>"0" to minimum pixel voltage for normal black pane</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>"0" to maximum pixel voltage for normal white pane</td> </tr> </tbody> </table>	REV_Panel	Mapping data		0	"0" to minimum pixel voltage for normal black pane	1	"0" to maximum pixel voltage for normal white pane																													
REV_Panel	Mapping data																																							
	0	"0" to minimum pixel voltage for normal black pane																																						
1	"0" to maximum pixel voltage for normal white pane																																							
BGR_PANEL	I	1	MPU	<p>Input pin to select the color mapping. (1: VDDI, 0: VSSD) (latch type)</p> <table border="1"> <thead> <tr> <th rowspan="2">BGR_panel</th> <th colspan="2">Color mapping</th> </tr> <tr> <th>0</th> <th>R->G->B</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>B->G->R</td> </tr> </tbody> </table>	BGR_panel	Color mapping		0	R->G->B	1	B->G->R																													
BGR_panel	Color mapping																																							
	0	R->G->B																																						
1	B->G->R																																							
TEST1	I	1	VSSD	A test pin. Make sure to fix it to the VSSD level. (weak pull low)																																				
TEST2	I	1	VSSD	A test pin. Make sure to fix it to the VSSD level. (weak pull low)																																				
TEST3	I	1	VSSD	A test pin. Make sure to fix it to the VSSD level. (weak pull low)																																				
OSC	I	1	Open or Connect to	Oscillator input for test purpose. If not used, please let it open or connected to VSSD. (weak pull low)																																				

Input Parts

		VSSD	
BURN	I	1	MPU

Free Running mode (**weak pull low**)

If BURN=Hi, this can enable free running mode for burn in test.

The display data alternates between full black and full white independent of input data in free running mode.

Output Part

Signals	I/O	Pin Number	Connected with	Description
S1~396	O	396	LCD	Output voltages applied to the liquid crystal. The shift direction of segment signal outputs is changeable with the SS bit. For example, if SS=0, DATA IN THE ram address "0000" is output from S1. If SS=1, the same data in the ram address "0000" is output from S396. S1,S4,S7,...display red (R),S2,S5,S8,...display green (G),and S3,S6,S9,...display blue(B) (SS=0, BGR=0).
G1~162	O	160	LCD	Output signals from gate lines. VGH: the level to select the gate lines VGL: the level not to select the gate lines
VCOM	O	2	TFT common electrode	The power supply of common voltage in TFT driving. The voltage amplitude between VCOMH and VCOML is output. The alternation cycle can be set by the POL pin. Connect this pin to the common electrode in TFT panel.
VCOMH	O	1	Stabilizing capacitor or open	Connect this pin to the capacitor for stabilization. This pin indicates a high level of VCOM amplitude generated in driving the VCOM alternation.
VCOML	O	1	Stabilizing capacitor or open	When the VCOM alternation is driven, this pin indicates a low level of VCOM amplitude. Connect this pin to a capacitor for stabilization. When the VCOMG bit is low, the VCOML output stops and a capacitor for stabilization is not needed.
VREG1OUT	O	1	Stabilizing capacitor or open	A reference voltage for VGAM between VSSD and VGL from the reference voltage between VDD and VSSD that is generated internally. The factor of step-up can be set through an internal register. Connect a capacitor for stabilization. As it is the reference voltage for generating VgoffOUT. Connect to an external power supply lower than VGL, if not using the adjustment circuit 2. VGAM1OUT = 3.0 ~ (VLCD - 0.5)V
VLCD	O	1	Stabilizing capacitor	An output from the step-up circuit1, of twice the VDD level. Connect to a stabilizing capacitor 1uF between VLCD and VSSD. VLCD=4.0 to 5.5V, Connect to VLCDC.
VGL	O	1	Stabilizing capacitor	An output from the step-up circuit2 or -3~-5 time the VDD level. The step-up rate is determined with BT3-0 bits. Connect to a stabilizing capacitor 1uF between VSSD and VGL. Min. VGL = -16V
VCL	O	1	Stabilizing capacitor	A power supply for the VCOML level. Connect to a stabilizing capacitor 1uF between VSSD and VCL. VCL=-2V ~ -3.3V
TE	O	1	MPU or open	A frame start pulse output (amplitude: VDDI-VSSD). Use when writing data to RAM in synchronization with FLM. When FLM is not used, disconnect it
VTESTOUT	O	1	Open	A test pin. Disconnect it.
VDDD	O	4	Stabilizing capacitor	A stabilizing capacitor for logic power. Connect with the capacitor 1uF.
VREF	0	1	Open	Reference voltage for power circuit Please open this pads.
VGH	O	1	Stabilizing capacitor	An output from the step-up circuit2 or 4~6 time the VDD level. The step-up rate is determined with BT3-0 bits. Connect to a stabilizing capacitor 1uF between VGH and VSSD. Place a Schottky barrier diode between VDD and VGH. (See "configuration of the power supply"). Max. VGH=16V.

Input/Output Part				
Signals	I/O	Pin Number	Connected with	Description
C11A,C11B	I/O	2	Step-up Capacitor	Connect to the step-up capacitors according to the step-up factor. Leave this pin open if the internal step-up circuit is not used.
C12A, C12B C23A, C23B	I/O	2	Open	Dummy pads. Please open this pin.
C21A, C21B C22A, C22B	I/O	8	Step-up Capacitor	Connect these pins to the capacitors for the step-up circuit 2. According to the step-up rate. When not using the step-up circuit2, disconnect them.
DB0_SDA	I/O	1	MPU	When it Operates in system interface mode, This pin (DB0) is used on bi-directional data bus. For serial interface, this pin (SDA) is for serial data pin when operate on serial data transfer interface mode of Command-parameter Interface mode. Data would be latched on the rising edge of the SCL signal. Let it open if this pin is not used.
DB0~17	I/O	18	MPU	When Operates in system interface mode, it is used liked an 18-bit bi-directional data bus. 8-bit bus: use DB17-DB10 9-bit bus: use DB17-DB9 16-bit bus: use DB17-DB10 and DB8-DB1 18-bit bus: use DB17-DB0 6-bit bus: use PD17-PD12 16-bit bus: use PD17-PD13 and PD11-PD1 18-bit bus: use PD17-PD0 Let unused data pins open.
DUMMY	-	16	Open	Dummy pads. Disconnect them.
DUMMYR1~R2	-	2	-	Dummy pads. Available for measuring the COG contact resistance. DUMMYR1 and DUMMYR2 are short-circuited within the chip.

Power Part				
Signals	I/O	Pin Number	Connected with	Description
VDDI	P	1	Power supply	Power supply for interface pin. VDDI = 1.65 ~3.3 V.
VSSD	P	1	Power supply	Ground for the logic side. VSSD = 0V
VSSA	P	1	Power supply	Analog ground. VSSA = 0V. When using the COG method, connect to VSSD on the FPC to prevent noise.
VDD	P	1	Power supply	A power supply for the analog circuit. VDD = 2.3 ~ 3.3V

4.2 Pin assignment

Chip size : 9900um x 670um

Including : Seal-ring : 15um*2


Scribe line : 40um*2

- Chip thickness : 300 um (typ.) / 400 um
 - Pad coordinate : PAD center
 - Coordinate Origin : Chip Center
 - Au Bump Size
 - Bump height tolerance +/- 3um
 - Bump size tolerance:
 - Output bump width: 16 +/- 2um
 - Output bump length: 98 +/- 3um
 - Input bump width: 35/40 +/- 3um
 - Input bump length: 90 +/- 3um
 - Au bump height : 15 um +/- 3um
 - Numbers in the figure corresponds to pad coordinate numbers
 - Alignment Mark
 - Arrangement : Two places
 - A1: Coordinate (X,Y) = (-4841, -220)
 - A2: Coordinate (X,Y) = (4841, -220)

Arrangement : Two places

A1: Coordinate (X,Y) = (-4841, -220)

A2: Coordinate (X,Y) = (-4841, -220)

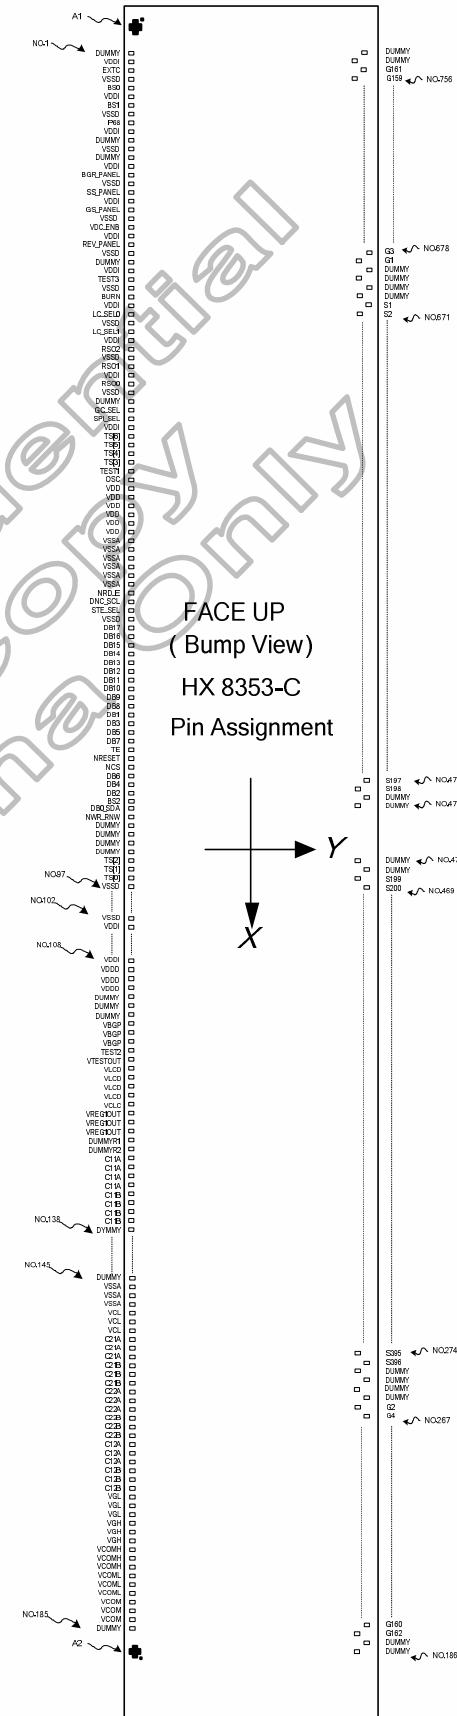

FACE UP
(Bump View)

Pin Assignment

Y

X

S197	↔ NOAT
S198	↔ NOAT
DUMMY	↔ NOAT
S199	↔ NOAT
S200	↔ NOAT
S201	↔ NO469
S202	↔ NO469
DUMMY	↔ NO469
DUMMY	↔ NO469
S204	↔ NO469
S205	↔ NC274
S206	↔ NC274
DUMMY	↔ NC274
DUMMY	↔ NC274
S207	↔ NC274
S208	↔ NO267
S209	↔ NO267
DUMMY	↔ NO267
DUMMY	↔ NO267
S210	↔ NO267

Himax Confidential

Himax Confidential
This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

4.3 PAD Coordinate

No.	PAD NAME	X	Y	Bump Size	I/O Pad	No.	PAD NAME	X	Y	Bump Size	I/O Pad	No.	PAD NAME	X	Y	Bump Size	I/O Pad
1	Dummy	-4750	-231	35 X 90	Input	71	DB13	-1150	-231	40 X 90	Input	141	Dummy	2550	-231	35 X 90	Input
2	IOVCC	-4700	-231	35 X 90	Input	72	DB12	-1090	-231	40 X 90	Input	142	Dummy	2600	-231	35 X 90	Input
3	EXTC	-4650	-231	35 X 90	Input	73	DB11	-1030	-231	40 X 90	Input	143	Dummy	2650	-231	35 X 90	Input
4	VSSD	-4600	-231	35 X 90	Input	74	DB10	-970	-231	40 X 90	Input	144	Dummy	2700	-231	35 X 90	Input
5	BS0	-4550	-231	35 X 90	Input	75	DB9	-910	-231	40 X 90	Input	145	Dummy	2750	-231	35 X 90	Input
6	IOVCC	-4500	-231	35 X 90	Input	76	DB8	-850	-231	40 X 90	Input	146	VSSA	2800	-231	35 X 90	Input
7	BS1	-4450	-231	35 X 90	Input	77	DB1	-790	-231	40 X 90	Input	147	VSSA	2850	-231	35 X 90	Input
8	VSSD	-4400	-231	35 X 90	Input	78	DB3	-730	-231	40 X 90	Input	148	VSSA	2900	-231	35 X 90	Input
9	P68	-4350	-231	35 X 90	Input	79	DB5	-670	-231	40 X 90	Input	149	VCL	2950	-231	35 X 90	Output
10	IOVCC	-4300	-231	35 X 90	Input	80	DB7	-610	-231	40 X 90	Input	150	VCL	3000	-231	35 X 90	Output
11	Dummy	-4250	-231	35 X 90	Input	81	TE	-550	-231	40 X 90	Input	151	VCL	3050	-231	35 X 90	Output
12	VSSD	-4200	-231	35 X 90	Input	82	NRESET	-490	-231	40 X 90	Input	152	C21A	3100	-231	35 X 90	Input
13	Dummy	-4150	-231	35 X 90	Input	83	NCS	-430	-231	40 X 90	Input	153	C21A	3150	-231	35 X 90	Input
14	IOVCC	-4100	-231	35 X 90	Input	84	DB6	-370	-231	40 X 90	Input	154	C21A	3200	-231	35 X 90	Input
15	BGR_PANEL	-4050	-231	35 X 90	Input	85	DB4	-310	-231	40 X 90	Input	155	C21B	3250	-231	35 X 90	Input
16	VSSD	-4000	-231	35 X 90	Input	86	DB2	-250	-231	40 X 90	Input	156	C21B	3300	-231	35 X 90	Input
17	SS_PANEL	-3950	-231	35 X 90	Input	87	BS2	-190	-231	40 X 90	Input	157	C21B	3350	-231	35 X 90	Input
18	IOVCC	-3900	-231	35 X 90	Input	88	DB0_SDA	-130	-231	40 X 90	Input	158	C22A	3400	-231	35 X 90	Input
19	GS_PANEL	-3850	-231	35 X 90	Input	89	NWR_RNW	-70	-231	40 X 90	Input	159	C22A	3450	-231	35 X 90	Input
20	VSSD	-3800	-231	35 X 90	Input	90	Dummy	0	-231	35 X 90	Input	160	C22A	3500	-231	35 X 90	Input
21	VDCENB	-3750	-231	35 X 90	Input	91	Dummy	50	-231	35 X 90	Input	161	C22B	3550	-231	35 X 90	Input
22	IOVCC	-3700	-231	35 X 90	Input	92	Dummy	100	-231	35 X 90	Input	162	C22B	3600	-231	35 X 90	Input
23	REV_PANEL	-3650	-231	35 X 90	Input	93	Dummy	150	-231	35 X 90	Input	163	C22B	3650	-231	35 X 90	Input
24	VSSD	-3600	-231	35 X 90	Input	94	TS[2]	200	-231	35 X 90	Input	164	C12A	3700	-231	35 X 90	Input
25	Dummy	-3550	-231	35 X 90	Input	95	TS[1]	250	-231	35 X 90	Input	165	C12A	3750	-231	35 X 90	Input
26	IOVCC	-3500	-231	35 X 90	Input	96	TS[0]	300	-231	35 X 90	Input	166	C12A	3800	-231	35 X 90	Input
27	TEST3	-3450	-231	35 X 90	Input	97	VSSD	350	-231	35 X 90	Input	167	C12B	3850	-231	35 X 90	Input
28	VSSD	-3400	-231	35 X 90	Input	98	VSSD	400	-231	35 X 90	Input	168	C12B	3900	-231	35 X 90	Input
29	BURN	-3350	-231	35 X 90	Input	99	VSSD	450	-231	35 X 90	Input	169	C12B	3950	-231	35 X 90	Input
30	IOVCC	-3300	-231	35 X 90	Input	100	VSSD	500	-231	35 X 90	Input	170	VGL	4000	-231	35 X 90	Output
31	LC_SEL0	-3250	-231	35 X 90	Input	101	VSSD	550	-231	35 X 90	Input	171	VGL	4050	-231	35 X 90	Output
32	VSSD	-3200	-231	35 X 90	Input	102	VSSD	600	-231	35 X 90	Input	172	VGL	4100	-231	35 X 90	Output
33	LC_SEL1	-3150	-231	35 X 90	Input	103	IOVCC	650	-231	35 X 90	Input	173	VGH	4150	-231	35 X 90	Output
34	IOVCC	-3100	-231	35 X 90	Input	104	IOVCC	700	-231	35 X 90	Input	174	VGH	4200	-231	35 X 90	Output
35	RS02	-3050	-231	35 X 90	Input	105	IOVCC	750	-231	35 X 90	Input	175	VGH	4250	-231	35 X 90	Output
36	VSSD	-3000	-231	35 X 90	Input	106	IOVCC	800	-231	35 X 90	Input	176	VCOMH	4300	-231	35 X 90	Output
37	RS01	-2950	-231	35 X 90	Input	107	IOVCC	850	-231	35 X 90	Input	177	VCOMH	4350	-231	35 X 90	Output
38	IOVCC	-2900	-231	35 X 90	Input	108	IOVCC	900	-231	35 X 90	Input	178	VCOMH	4400	-231	35 X 90	Output
39	RS00	-2850	-231	35 X 90	Input	109	VDDD	950	-231	35 X 90	Output	179	VCOML	4450	-231	35 X 90	Output
40	VSSD	-2800	-231	35 X 90	Input	110	VDDD	1000	-231	35 X 90	Output	180	VCOML	4500	-231	35 X 90	Output
41	Dummy	-2750	-231	35 X 90	Input	111	VDDD	1050	-231	35 X 90	Output	181	VCOML	4550	-231	35 X 90	Output
42	GC_SEL	-2700	-231	35 X 90	Input	112	Dummy	1100	-231	35 X 90	Input	182	VCOM	4600	-231	35 X 90	Output
43	SPI_SEL	-2650	-231	35 X 90	Input	113	Dummy	1150	-231	35 X 90	Input	183	VCOM	4650	-231	35 X 90	Output
44	IOVCC	-2600	-231	35 X 90	Input	114	Dummy	1200	-231	35 X 90	Input	184	VCOM	4700	-231	35 X 90	Output
45	TS[6]	-2550	-231	35 X 90	Input	115	VREF	1250	-231	35 X 90	Output	185	DUMMY	4750	-231	35 X 90	Output
46	TS[5]	-2500	-231	35 X 90	Input	116	VREF	1300	-231	35 X 90	Output	186	DUMMY	4772	110	16 X 98	Output
47	TS[4]	-2450	-231	35 X 90	Input	117	VREF	1350	-231	35 X 90	Output	187	DUMMY	4756	227	16 X 98	Output
48	TS[3]	-2400	-231	35 X 90	Input	118	TEST2	1400	-231	35 X 90	Input	188	G162	4740	110	16 X 98	Output
49	TEST1	-2350	-231	35 X 90	Input	119	VTESTOUT	1450	-231	35 X 90	Output	189	G160	4724	227	16 X 98	Output
50	OSC	-2300	-231	35 X 90	Input	120	VLCD(DDV)	1500	-231	35 X 90	Output	190	G158	4708	110	16 X 98	Output
51	VCI	-2250	-231	35 X 90	Input	121	VLCD(DDV)	1550	-231	35 X 90	Output	191	G156	4692	227	16 X 98	Output
52	VCI	-2200	-231	35 X 90	Input	122	VLCD(DDV)	1600	-231	35 X 90	Output	192	G154	4676	110	16 X 98	Output
53	VCI	-2150	-231	35 X 90	Input	123	VLCD(DDV)	1650	-231	35 X 90	Output	193	G152	4660	227	16 X 98	Output
54	VCI	-2100	-231	35 X 90	Input	124	VLCD(DDV)	1700	-231	35 X 90	Output	194	G150	4644	110	16 X 98	Output
55	VCI	-2050	-231	35 X 90	Input	125	VREG1OUT	1750	-231	35 X 90	Output	195	G148	4628	227	16 X 98	Output
56	VCI	-2000	-231	35 X 90	Input	126	VREG1OUT	1800	-231	35 X 90	Output	196	G146	4612	110	16 X 98	Output
57	VSSA	-1950	-231	35 X 90	Input	127	VREG1OUT	1850	-231	35 X 90	Output	197	G144	4596	227	16 X 98	Output
58	VSSA	-1900	-231	35 X 90	Input	128	DUMMYR1	1900	-231	35 X 90	Input	198	G142	4580	110	16 X 98	Output
59	VSSA	-1850	-231	35 X 90	Input	129	DUMMYR2	1950	-231	35 X 90	Input	199	G140	4564	227	16 X 98	Output
60	VSSA	-1800	-231	35 X 90	Input	130	C11A	2000	-231	35 X 90	Input	200	G138	4548	110	16 X 98	Output
61	VSSA	-1750	-231	35 X 90	Input	131	C11A	2050	-231	35 X 90	Input	201	G136	4532	227	16 X 98	Output
62	VSSA	-1700	-231	35 X 90	Input	132	C11A	2100	-231	35 X 90	Input	202	G134	4516	110	16 X 98	Output
63	NRD_E	-1630	-231	40 X 90	Input	133	C11A	2150	-231	35 X 90	Input	203	G132	4500	227	16 X 98	Output
64	DNC_SCL	-1570	-231	40 X 90	Input	134	C11B	2200	-231	35 X 90	Input	204	G130	4484	110	16 X 98	Output
65	STE_SEL	-1510	-231	40 X 90	Input	135	C11B	2250	-231	35 X 90	Input	205	G128	4468	227	16 X 98	Output
66	VSSD	-1450	-231	40 X 90	Input	136	C11B	2300	-231	35 X 90	Input	206	G126	4452	110	16 X 98	Output
67	DB17	-1390	-231	40 X 90	Input	137	C11B	2350	-231	35 X 90	Input	207	G124	4436	227	16 X 98	Output
68	DB16	-1330	-231	40 X 90	Input	138	Dummy	2400	-231	35 X 90	Input	208	G122	4420	110	16 X 98	Output
69	DB15	-1270	-231	40 X 90	Input	139	Dummy	2450	-231	35 X 90	Input	209	G120	4404	227	16 X 98	Output
70	DB14	-1210	-231	40 X 90	Input	140	Dummy	2500	-231	35 X 90	Input	210	G118	4388	110	16 X 98	Output

No.	PAD NAME	X	Y	Bump Size	I/O Pad
211	G116	4372	227	16 X 98	Output
212	G114	4356	110	16 X 98	Output
213	G112	4340	227	16 X 98	Output
214	G110	4324	110	16 X 98	Output
215	G108	4308	227	16 X 98	Output
216	G106	4292	110	16 X 98	Output
217	G104	4276	227	16 X 98	Output
218	G102	4260	110	16 X 98	Output
219	G100	4244	227	16 X 98	Output
220	G98	4228	110	16 X 98	Output
221	G96	4212	227	16 X 98	Output
222	G94	4196	110	16 X 98	Output
223	G92	4180	227	16 X 98	Output
224	G90	4164	110	16 X 98	Output
225	G88	4148	227	16 X 98	Output
226	G86	4132	110	16 X 98	Output
227	G84	4116	227	16 X 98	Output
228	G82	4100	110	16 X 98	Output
229	G80	4084	227	16 X 98	Output
230	G78	4068	110	16 X 98	Output
231	G76	4052	227	16 X 98	Output
232	G74	4036	110	16 X 98	Output
233	G72	4020	227	16 X 98	Output
234	G70	4004	110	16 X 98	Output
235	G68	3988	227	16 X 98	Output
236	G66	3972	110	16 X 98	Output
237	G64	3956	227	16 X 98	Output
238	G62	3940	110	16 X 98	Output
239	G60	3924	227	16 X 98	Output
240	G58	3908	110	16 X 98	Output
241	G56	3892	227	16 X 98	Output
242	G54	3876	110	16 X 98	Output
243	G52	3860	227	16 X 98	Output
244	G50	3844	110	16 X 98	Output
245	G48	3828	227	16 X 98	Output
246	G46	3812	110	16 X 98	Output
247	G44	3796	227	16 X 98	Output
248	G42	3780	110	16 X 98	Output
249	G40	3764	227	16 X 98	Output
250	G38	3748	110	16 X 98	Output
251	G36	3732	227	16 X 98	Output
252	G34	3716	110	16 X 98	Output
253	G32	3700	227	16 X 98	Output
254	G30	3684	110	16 X 98	Output
255	G28	3668	227	16 X 98	Output
256	G26	3652	110	16 X 98	Output
257	G24	3636	227	16 X 98	Output
258	G22	3620	110	16 X 98	Output
259	G20	3604	227	16 X 98	Output
260	G18	3588	110	16 X 98	Output
261	G16	3572	227	16 X 98	Output
262	G14	3556	110	16 X 98	Output
263	G12	3540	227	16 X 98	Output
264	G10	3524	110	16 X 98	Output
265	G8	3508	227	16 X 98	Output
266	G6	3492	110	16 X 98	Output
267	G4	3476	227	16 X 98	Output
268	G2	3460	110	16 X 98	Output
269	DUMMY	3444	227	16 X 98	Output
270	DUMMY	3428	110	16 X 98	Output
271	DUMMY	3412	227	16 X 98	Output
272	DUMMY	3396	110	16 X 98	Output
273	S396	3380	227	16 X 98	Output
274	S395	3364	110	16 X 98	Output
275	S394	3348	227	16 X 98	Output
276	S393	3332	110	16 X 98	Output
277	S392	3316	227	16 X 98	Output
278	S391	3300	110	16 X 98	Output
279	S390	3284	227	16 X 98	Output
280	S389	3268	110	16 X 98	Output
281	S388	3252	227	16 X 98	Output
282	S387	3236	110	16 X 98	Output
283	S386	3220	227	16 X 98	Output
284	S385	3204	110	16 X 98	Output
285	S384	3188	227	16 X 98	Output
286	S383	3172	110	16 X 98	Output
287	S382	3156	227	16 X 98	Output
288	S381	3140	110	16 X 98	Output
289	S380	3124	227	16 X 98	Output
290	S379	3108	110	16 X 98	Output
291	S378	3092	227	16 X 98	Output
292	S377	3076	110	16 X 98	Output
293	S376	3060	227	16 X 98	Output
294	S375	3044	110	16 X 98	Output
295	S374	3028	227	16 X 98	Output
296	S373	3012	110	16 X 98	Output
297	S372	2996	227	16 X 98	Output
298	S371	2980	110	16 X 98	Output
299	S370	2964	227	16 X 98	Output
300	S369	2948	110	16 X 98	Output
301	S368	2932	227	16 X 98	Output
302	S367	2916	110	16 X 98	Output
303	S366	2900	227	16 X 98	Output
304	S365	2884	110	16 X 98	Output
305	S364	2868	227	16 X 98	Output
306	S363	2852	110	16 X 98	Output
307	S362	2836	227	16 X 98	Output
308	S361	2820	110	16 X 98	Output
309	S360	2804	227	16 X 98	Output
310	S359	2788	110	16 X 98	Output
311	S358	2772	227	16 X 98	Output
312	S357	2756	110	16 X 98	Output
313	S356	2740	227	16 X 98	Output
314	S355	2724	110	16 X 98	Output
315	S354	2708	227	16 X 98	Output
316	S353	2692	110	16 X 98	Output
317	S352	2676	227	16 X 98	Output
318	S351	2660	110	16 X 98	Output
319	S350	2644	227	16 X 98	Output
320	S349	2628	110	16 X 98	Output
321	S348	2612	227	16 X 98	Output
322	S347	2596	110	16 X 98	Output
323	S346	2580	227	16 X 98	Output
324	S345	2564	110	16 X 98	Output
325	S344	2548	227	16 X 98	Output
326	S343	2532	110	16 X 98	Output
327	S342	2516	227	16 X 98	Output
328	S341	2500	110	16 X 98	Output
329	S340	2484	227	16 X 98	Output
330	S339	2468	110	16 X 98	Output
331	S338	2452	227	16 X 98	Output
332	S337	2436	110	16 X 98	Output
333	S336	2420	227	16 X 98	Output
334	S335	2404	110	16 X 98	Output
335	S334	2388	227	16 X 98	Output
336	S333	2372	110	16 X 98	Output
337	S332	2356	227	16 X 98	Output
338	S331	2340	110	16 X 98	Output
339	S330	2324	227	16 X 98	Output
340	S329	2308	110	16 X 98	Output
341	S328	2292	227	16 X 98	Output
342	S327	2276	110	16 X 98	Output
343	S326	2260	227	16 X 98	Output
344	S325	2244	110	16 X 98	Output
345	S324	2228	227	16 X 98	Output
346	S323	2212	110	16 X 98	Output
347	S322	2196	227	16 X 98	Output
348	S321	2180	110	16 X 98	Output
349	S320	2164	227	16 X 98	Output
350	S319	2148	110	16 X 98	Output
351	S318	2132	227	16 X 98	Output
352	S317	2116	110	16 X 98	Output
353	S316	2100	227	16 X 98	Output
354	S315	2084	110	16 X 98	Output
355	S314	2068	227	16 X 98	Output
356	S313	2052	110	16 X 98	Output
357	S312	2036	227	16 X 98	Output
358	S311	2020	110	16 X 98	Output
359	S310	2004	227	16 X 98	Output
360	S309	1988	110	16 X 98	Output
361	S308	1972	227	16 X 98	Output
362	S307	1956	110	16 X 98	Output
363	S306	1940	227	16 X 98	Output
364	S305	1924	110	16 X 98	Output
365	S304	1908	227	16 X 98	Output
366	S303	1892	110	16 X 98	Output
367	S302	1876	227	16 X 98	Output
368	S301	1860	110	16 X 98	Output
369	S300	1844	227	16 X 98	Output
370	S299	1828	110	16 X 98	Output
371	S298	1812	227	16 X 98	Output
372	S297	1796	110	16 X 98	Output
373	S296	1780	227	16 X 98	Output
374	S295	1764	110	16 X 98	Output
375	S294	1748	227	16 X 98	Output
376	S293	1732	110	16 X 98	Output
377	S292	1716	227	16 X 98	Output
378	S291	1700	110	16 X 98	Output
379	S290	1684	227	16 X 98	Output
380	S289	1668	110	16 X 98	Output
381	S288	1652	227	16 X 98	Output
382	S287	1636	110	16 X 98	Output
383	S286	1620	227	16 X 98	Output
384	S285	1604	110	16 X 98	Output
385	S284	1588	227	16 X 98	Output
386	S283	1572	110	16 X 98	Output
387	S282	1556	227	16 X 98	Output
388	S281	1540	110	16 X 98	Output
389	S280	1524	227	16 X 98	Output
390	S279	1508	110	16 X 98	Output
391	S278	1492	227	16 X 98	Output
392	S277	1476	110	16 X 98	Output
393	S276	1460	227	16 X 98	Output
394	S275	1444	110	16 X 98	Output
395	S274	1428	227	16 X 98	Output
396	S273	1412	110	16 X 98	Output
397	S272	1396	227	16 X 98	Output
398	S271	1380	110	16 X 98	Output
399	S270	1364	227	16 X 98	Output
400	S269	1348	110	16 X 98	Output
401	S268	1332	227	16 X 98	Output
402	S267	1316	110	16 X 98	Output
403	S266	1300	227	16 X 98	Output
404	S265	1284	110	16 X 98	Output
405	S264	1268	227	16 X 98	Output
406	S263	1252	110	16 X 98	Output
407	S262	1236	227	16 X 98	Output
408	S261	1220	110	16 X 98	Output
409	S260	1204	227	16 X 98	Output
410	S2				

No.	PAD NAME	X	Y	Bump Size	I/O Pad
421	S248	1012	227	16 X 98	Output
422	S247	996	110	16 X 98	Output
423	S246	980	227	16 X 98	Output
424	S245	964	110	16 X 98	Output
425	S244	948	227	16 X 98	Output
426	S243	932	110	16 X 98	Output
427	S242	916	227	16 X 98	Output
428	S241	900	110	16 X 98	Output
429	S240	884	227	16 X 98	Output
430	S239	868	110	16 X 98	Output
431	S238	852	227	16 X 98	Output
432	S237	836	110	16 X 98	Output
433	S236	820	227	16 X 98	Output
434	S235	804	110	16 X 98	Output
435	S234	788	227	16 X 98	Output
436	S233	772	110	16 X 98	Output
437	S232	756	227	16 X 98	Output
438	S231	740	110	16 X 98	Output
439	S230	724	227	16 X 98	Output
440	S229	708	110	16 X 98	Output
441	S228	692	227	16 X 98	Output
442	S227	676	110	16 X 98	Output
443	S226	660	227	16 X 98	Output
444	S225	644	110	16 X 98	Output
445	S224	628	227	16 X 98	Output
446	S223	612	110	16 X 98	Output
447	S222	596	227	16 X 98	Output
448	S221	580	110	16 X 98	Output
449	S220	564	227	16 X 98	Output
450	S219	548	110	16 X 98	Output
451	S218	532	227	16 X 98	Output
452	S217	516	110	16 X 98	Output
453	S216	500	227	16 X 98	Output
454	S215	484	110	16 X 98	Output
455	S214	468	227	16 X 98	Output
456	S213	452	110	16 X 98	Output
457	S212	436	227	16 X 98	Output
458	S211	420	110	16 X 98	Output
459	S210	404	227	16 X 98	Output
460	S209	388	110	16 X 98	Output
461	S208	372	227	16 X 98	Output
462	S207	356	110	16 X 98	Output
463	S206	340	227	16 X 98	Output
464	S205	324	110	16 X 98	Output
465	S204	308	227	16 X 98	Output
466	S203	292	110	16 X 98	Output
467	S202	276	227	16 X 98	Output
468	S201	260	110	16 X 98	Output
469	S200	244	227	16 X 98	Output
470	S199	228	110	16 X 98	Output
471	DUMMY	212	227	16 X 98	Output
472	DUMMY	196	110	16 X 98	Output
473	DUMMY	-196	110	16 X 98	Output
474	DUMMY	-212	227	16 X 98	Output
475	S198	-228	110	16 X 98	Output
476	S197	-244	227	16 X 98	Output
477	S196	-260	110	16 X 98	Output
478	S195	-276	227	16 X 98	Output
479	S194	-292	110	16 X 98	Output
480	S193	-308	227	16 X 98	Output
481	S192	-324	110	16 X 98	Output
482	S191	-340	227	16 X 98	Output
483	S190	-356	110	16 X 98	Output
484	S189	-372	227	16 X 98	Output
485	S188	-388	110	16 X 98	Output
486	S187	-404	227	16 X 98	Output
487	S186	-420	110	16 X 98	Output
488	S185	-436	227	16 X 98	Output
489	S184	-452	110	16 X 98	Output
490	S183	-468	227	16 X 98	Output

No.	PAD NAME	X	Y	Bump Size	I/O Pad
491	S182	-484	110	16 X 98	Output
492	S181	-500	227	16 X 98	Output
493	S180	-516	110	16 X 98	Output
494	S179	-532	227	16 X 98	Output
495	S178	-548	110	16 X 98	Output
496	S177	-564	227	16 X 98	Output
497	S176	-580	110	16 X 98	Output
498	S175	-596	227	16 X 98	Output
499	S174	-612	110	16 X 98	Output
500	S173	-628	227	16 X 98	Output
501	S172	-644	110	16 X 98	Output
502	S171	-660	227	16 X 98	Output
503	S170	-676	110	16 X 98	Output
504	S169	-692	227	16 X 98	Output
505	S168	-708	110	16 X 98	Output
506	S167	-724	227	16 X 98	Output
507	S166	-740	110	16 X 98	Output
508	S165	-756	227	16 X 98	Output
509	S164	-772	110	16 X 98	Output
510	S163	-788	227	16 X 98	Output
511	S162	-804	110	16 X 98	Output
512	S161	-820	227	16 X 98	Output
513	S160	-836	110	16 X 98	Output
514	S159	-852	227	16 X 98	Output
515	S158	-868	110	16 X 98	Output
516	S157	-884	227	16 X 98	Output
517	S156	-900	110	16 X 98	Output
518	S155	-916	227	16 X 98	Output
519	S154	-932	110	16 X 98	Output
520	S153	-948	227	16 X 98	Output
521	S152	-964	110	16 X 98	Output
522	S151	-980	227	16 X 98	Output
523	S150	-996	110	16 X 98	Output
524	S149	-1012	227	16 X 98	Output
525	S148	-1028	110	16 X 98	Output
526	S147	-1044	227	16 X 98	Output
527	S146	-1060	110	16 X 98	Output
528	S145	-1076	227	16 X 98	Output
529	S144	-1092	110	16 X 98	Output
530	S143	-1108	227	16 X 98	Output
531	S142	-1124	110	16 X 98	Output
532	S141	-1140	227	16 X 98	Output
533	S140	-1156	110	16 X 98	Output
534	S139	-1172	227	16 X 98	Output
535	S138	-1188	110	16 X 98	Output
536	S137	-1204	227	16 X 98	Output
537	S136	-1220	110	16 X 98	Output
538	S135	-1236	227	16 X 98	Output
539	S134	-1252	110	16 X 98	Output
540	S133	-1268	227	16 X 98	Output
541	S132	-1284	110	16 X 98	Output
542	S131	-1300	227	16 X 98	Output
543	S130	-1316	110	16 X 98	Output
544	S129	-1332	227	16 X 98	Output
545	S128	-1348	110	16 X 98	Output
546	S127	-1364	227	16 X 98	Output
547	S126	-1380	110	16 X 98	Output
548	S125	-1396	227	16 X 98	Output
549	S124	-1412	110	16 X 98	Output
550	S123	-1428	227	16 X 98	Output
551	S122	-1444	110	16 X 98	Output
552	S121	-1460	227	16 X 98	Output
553	S120	-1476	110	16 X 98	Output
554	S119	-1492	227	16 X 98	Output
555	S118	-1508	110	16 X 98	Output
556	S117	-1524	227	16 X 98	Output
557	S116	-1540	110	16 X 98	Output
558	S115	-1556	227	16 X 98	Output
559	S114	-1572	110	16 X 98	Output
560	S113	-1588	227	16 X 98	Output

No.	PAD NAME	X	Y	Bump Size	I/O Pad
561	S112	-1604	110	16 X 98	Output
562	S111	-1620	227	16 X 98	Output
563	S110	-1636	110	16 X 98	Output
564	S109	-1652	227	16 X 98	Output
565	S108	-1668	110	16 X 98	Output
566	S107	-1684	227	16 X 98	Output
567	S106	-1700	110	16 X 98	Output
568	S105	-1716	227	16 X 98	Output
569	S104	-1732	110	16 X 98	Output
570	S103	-1748	227	16 X 98	Output
571	S102	-1764	110	16 X 98	Output
572	S101	-1780	227	16 X 98	Output
573	S100	-1796	110	16 X 98	Output
574	S99	-1812	227	16 X 98	Output
575	S98	-1828	110	16 X 98	Output
576	S97	-1844	227	16 X 98	Output
577	S96	-1860	110	16 X 98	Output
578	S95	-1876	227	16 X 98	Output
579	S94	-1892	110	16 X 98	Output
580	S93	-1908	227	16 X 98	Output
581	S92	-1924	110	16 X 98	Output
582	S91	-1940	227	16 X 98	Output
583	S90	-1956	110	16 X 98	Output
584	S89	-1972	227	16 X 98	Output
585	S88	-1988	110	16 X 98	Output
586	S87	-2004	227	16 X 98	Output
587	S86	-2020	110	16 X 98	Output
588	S85	-2036	227	16 X 98	Output
589	S84	-2052	110	16 X 98	Output
590	S83	-2068	227	16 X 98	Output
591	S82	-2084	110	16 X 98	Output
592	S81	-2100	227	16 X 98	Output
593	S80	-2116	110	16 X 98	Output
594	S79	-2132	227	16 X 98	Output
595	S78	-2148	110	16 X 98	Output
596	S77	-2164	227	16 X 98	Output
597	S76	-2180	110	16 X 98	Output
598	S75	-2196	227	16 X 98	Output
599	S74	-2212	110	16 X 98	Output
600	S73	-2228	227	16 X 98	Output
601	S72	-2244	110	16 X 98	Output
602	S71	-2260	227	16 X 98	Output
603	S70	-2276	110	16 X 98	Output
604	S69	-2292	227	16 X 98	Output
605	S68	-2308	110	16 X 98	Output
606	S67	-2324	227	16 X 98	Output
607	S66	-2340	110	16 X 98	Output
608	S65	-2356	227	16 X 98	Output
609	S64	-2372	110	16 X 98	Output
610	S				

No.	PAD NAME	X	Y	Bump Size	I/O Pad
631	S42	-2724	110	16 X 98	Output
632	S41	-2740	227	16 X 98	Output
633	S40	-2756	110	16 X 98	Output
634	S39	-2772	227	16 X 98	Output
635	S38	-2788	110	16 X 98	Output
636	S37	-2804	227	16 X 98	Output
637	S36	-2820	110	16 X 98	Output
638	S35	-2836	227	16 X 98	Output
639	S34	-2852	110	16 X 98	Output
640	S33	-2868	227	16 X 98	Output
641	S32	-2884	110	16 X 98	Output
642	S31	-2900	227	16 X 98	Output
643	S30	-2916	110	16 X 98	Output
644	S29	-2932	227	16 X 98	Output
645	S28	-2948	110	16 X 98	Output
646	S27	-2964	227	16 X 98	Output
647	S26	-2980	110	16 X 98	Output
648	S25	-2996	227	16 X 98	Output
649	S24	-3012	110	16 X 98	Output
650	S23	-3028	227	16 X 98	Output
651	S22	-3044	110	16 X 98	Output
652	S21	-3060	227	16 X 98	Output
653	S20	-3076	110	16 X 98	Output
654	S19	-3092	227	16 X 98	Output
655	S18	-3108	110	16 X 98	Output
656	S17	-3124	227	16 X 98	Output
657	S16	-3140	110	16 X 98	Output
658	S15	-3156	227	16 X 98	Output
659	S14	-3172	110	16 X 98	Output
660	S13	-3188	227	16 X 98	Output
661	S12	-3204	110	16 X 98	Output
662	S11	-3220	227	16 X 98	Output
663	S10	-3236	110	16 X 98	Output
664	S9	-3252	227	16 X 98	Output
665	S8	-3268	110	16 X 98	Output
666	S7	-3284	227	16 X 98	Output
667	S6	-3300	110	16 X 98	Output
668	S5	-3316	227	16 X 98	Output
669	S4	-3332	110	16 X 98	Output
670	S3	-3348	227	16 X 98	Output
671	S2	-3364	110	16 X 98	Output
672	S1	-3380	227	16 X 98	Output
673	DUMMY	-3396	110	16 X 98	Output
674	DUMMY	-3412	227	16 X 98	Output
675	DUMMY	-3428	110	16 X 98	Output
676	DUMMY	-3444	227	16 X 98	Output
677	G1	-3460	110	16 X 98	Output
678	G3	-3476	227	16 X 98	Output
679	G5	-3492	110	16 X 98	Output
680	G7	-3508	227	16 X 98	Output
681	G9	-3524	110	16 X 98	Output
682	G11	-3540	227	16 X 98	Output
683	G13	-3556	110	16 X 98	Output
684	G15	-3572	227	16 X 98	Output
685	G17	-3588	110	16 X 98	Output
686	G19	-3604	227	16 X 98	Output
687	G21	-3620	110	16 X 98	Output
688	G23	-3636	227	16 X 98	Output
689	G25	-3652	110	16 X 98	Output
690	G27	-3668	227	16 X 98	Output
691	G29	-3684	110	16 X 98	Output
692	G31	-3700	227	16 X 98	Output
693	G33	-3716	110	16 X 98	Output
694	G35	-3732	227	16 X 98	Output
695	G37	-3748	110	16 X 98	Output
696	G39	-3764	227	16 X 98	Output
697	G41	-3780	110	16 X 98	Output
698	G43	-3796	227	16 X 98	Output
699	G45	-3812	110	16 X 98	Output
700	G47	-3828	227	16 X 98	Output


No.	PAD NAME	X	Y	Bump Size	I/O Pad
701	G49	-3844	110	16 X 98	Output
702	G51	-3860	227	16 X 98	Output
703	G53	-3876	110	16 X 98	Output
704	G55	-3892	227	16 X 98	Output
705	G57	-3908	110	16 X 98	Output
706	G59	-3924	227	16 X 98	Output
707	G61	-3940	110	16 X 98	Output
708	G63	-3956	227	16 X 98	Output
709	G65	-3972	110	16 X 98	Output
710	G67	-3988	227	16 X 98	Output
711	G69	-4004	110	16 X 98	Output
712	G71	-4020	227	16 X 98	Output
713	G73	-4036	110	16 X 98	Output
714	G75	-4052	227	16 X 98	Output
715	G77	-4068	110	16 X 98	Output
716	G79	-4084	227	16 X 98	Output
717	G81	-4100	110	16 X 98	Output
718	G83	-4116	227	16 X 98	Output
719	G85	-4132	110	16 X 98	Output
720	G87	-4148	227	16 X 98	Output
721	G89	-4164	110	16 X 98	Output
722	G91	-4180	227	16 X 98	Output
723	G93	-4196	110	16 X 98	Output
724	G95	-4212	227	16 X 98	Output
725	G97	-4228	110	16 X 98	Output
726	G99	-4244	227	16 X 98	Output
727	G101	-4260	110	16 X 98	Output
728	G103	-4276	227	16 X 98	Output
729	G105	-4292	110	16 X 98	Output
730	G107	-4308	227	16 X 98	Output
731	G109	-4324	110	16 X 98	Output
732	G111	-4340	227	16 X 98	Output
733	G113	-4356	110	16 X 98	Output
734	G115	-4372	227	16 X 98	Output
735	G117	-4388	110	16 X 98	Output
736	G119	-4404	227	16 X 98	Output
737	G121	-4420	110	16 X 98	Output
738	G123	-4436	227	16 X 98	Output
739	G125	-4452	110	16 X 98	Output
740	G127	-4468	227	16 X 98	Output
741	G129	-4484	110	16 X 98	Output
742	G131	-4500	227	16 X 98	Output
743	G133	-4516	110	16 X 98	Output
744	G135	-4532	227	16 X 98	Output
745	G137	-4548	110	16 X 98	Output
746	G139	-4564	227	16 X 98	Output
747	G141	-4580	110	16 X 98	Output
748	G143	-4596	227	16 X 98	Output
749	G145	-4612	110	16 X 98	Output
750	G147	-4628	227	16 X 98	Output
751	G149	-4644	110	16 X 98	Output
752	G151	-4660	227	16 X 98	Output
753	G153	-4676	110	16 X 98	Output
754	G155	-4692	227	16 X 98	Output
755	G157	-4708	110	16 X 98	Output
756	G159	-4724	227	16 X 98	Output
757	G161	-4740	110	16 X 98	Output
758	DUMMY	-4756	227	16 X 98	Output
759	DUMMY	-4772	110	16 X 98	Output

No.	PAD NAME	X	Y	Bump Size	I/O Pad
-----	----------	---	---	-----------	---------


Alignment mark	X	Y
A1	-4841	-220
A2	4841	-220


4.4 Alignment mark

A_MARK (A1)

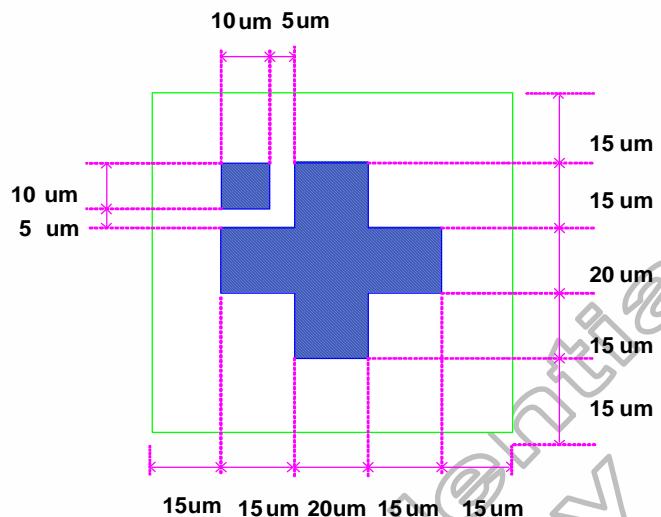

A_MARK (A2)

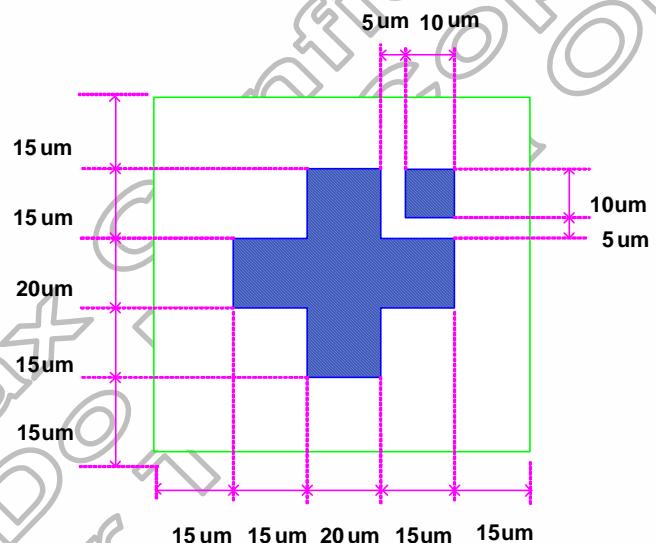

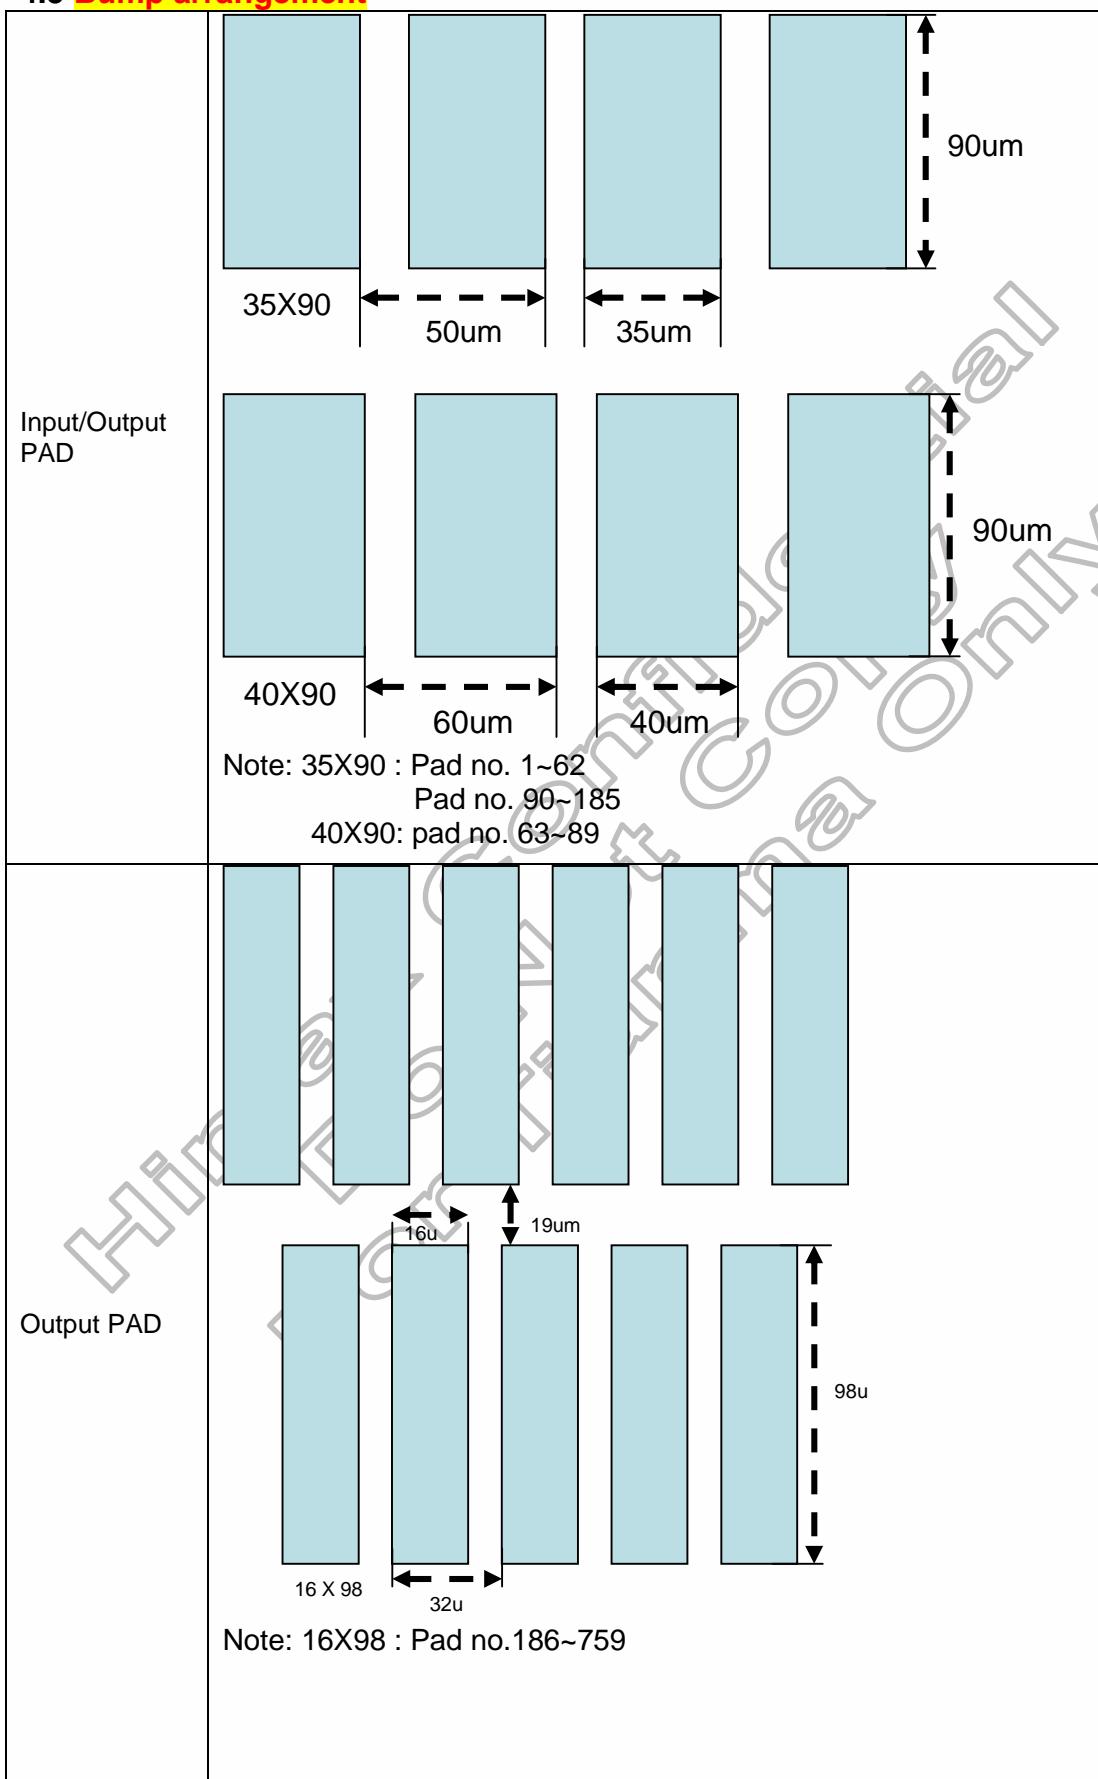4.5 Bump arrangement

5. Function Description

5.1 System Interface

The HX8353-C supports parallel 80-system and 68-system 18-/16-/9-/8-bits bus bus interface mode and 3W/4W serial interface mode. When NCS = "L", the parallel and serial bus system interface of the HX8353-C become active and data transfer through the interface circuit is available. The DNC_ SCL pin specifies whether the system interface circuit access is to the register command or to the GRAM. The input bus width format of system interface circuit is selected by external pins BS(2-0). For selecting the format of input bus, please refer to Table 5.1 and Table 5.2.

HX8353-C includes command code and the following parameter and GRAM data. The command code can be written through data bus by setting DNC_ SCL=0. Then the command or GRAM data can be written to register at which that index pointer pointed by setting DNC_ SCL=1.

Furthermore, there are two 18-bit bus control registers used to temporarily store the data written to or read from the GRAM. When the data is written into the GRAM from the MPU, it is first written into the write-data latch and then automatically written into the GRAM by internal operation. Data is read through the read-data latch when reading from the GRAM. Therefore, the first read data operation is invalid and the following read data operations are valid.

SPI_SEL	P68	BS2	BS1	BS0	Interface
x	0	1	0	0	80-system 8-bit Parallel
x	0	1	0	1	80-system 16-bit Parallel
x	0	1	1	0	80-system 9-bit Parallel
x	0	1	1	1	80-system 18-bit Parallel
x	1	1	0	0	68-system 8-bit Parallel
x	1	1	0	1	68-system 16-bit Parallel
x	1	1	1	0	68-system 9-bit Parallel
x	1	1	1	1	68-system 18-bit Parallel
0	x	0	x	x	3 wire serial Interface only
1	x	0	x	x	4 wire serial Interface only

Table 5. 1 Interface selection

Interface	E_NRD	RW_NWR	DNC_SCL	SDA	D17 – D0
80-system 8-bit Parallel	NRD	NWR	DNC	Unused	DB17-DB8: Unused, DB7-DB0: 8 bit data bus
80-system 9-bit Parallel	NRD	NWR	DNC	Unused	DB17-DB9: Unused, DB8-DB0: 9 bit data bus
80-system 16-bit Parallel	NRD	NWR	DNC	Unused	DB17-DB16: Unused, DB15-DB0: 16 bit data bus
80-system 18-bit Parallel	NRD	NWR	DNC	Unused	DB17-DB0: 18 bit data bus
3 wire serial Interface	Unused	--	SCL	SDA	Unused
68-system 8-bit Parallel	E	RW	DNC	Unused	DB17-D8: Unused, DB7-DB0: 8 bit data bus
68-system 9-bit Parallel	E	RW	DNC	Unused	DB17-D9: Unused, DB8-DB0: 9 bit data bus
68-system 16-bit Parallel	E	RW	DNC	Unused	DB17-DB16: Unused, D15-DB0: 16 bit data bus
68-system 18-bit Parallel	E	RW	DNC	Unused	DB17-DB0: 18 bit data bus
4 wire serial Interface	Unused	DNC	SCL	SDA	Unused

Table 5. 2 Interface Mode Selection

5.1.1 Parallel Bus System Interface



The input / output data from data pins (D17-0) and signal operation of the I80/M68 series parallel bus interface as listed in Table 5.3 and Table 5.4.



Operations	NWR_RNW	NRD_E	DNC_SCL
Writes command code	0	1	0
Reads internal status	1	0	0
Writes parameter into command or data into GRAM	0	1	1
Reads parameter from command or data from GRAM	1	0	1



Table 5. 3 Data Pin Function for I80 Series CPU

Operations	NWR_RNW	NRD_E	DNC_SCL
Writes command code	1	0	0
Reads internal status	1	1	0
Writes parameter into command or data into GRAM	1	0	1
Reads parameter from command or data from GRAM	1	1	1

Table 5. 4 Data Pin Function for M68 Series CPU

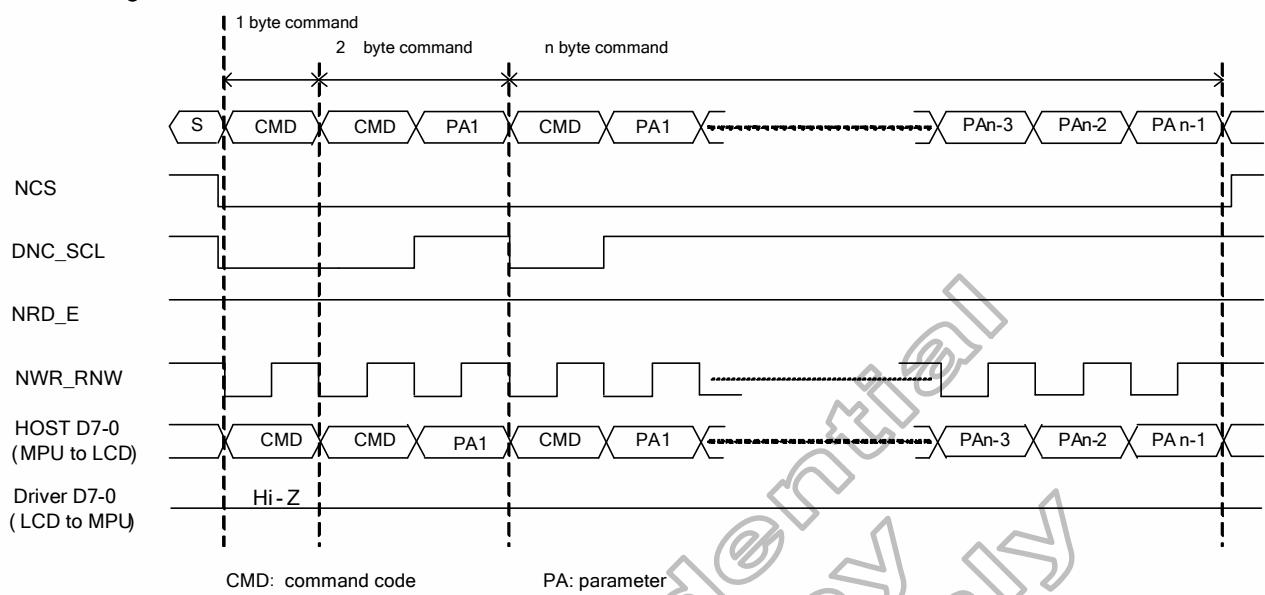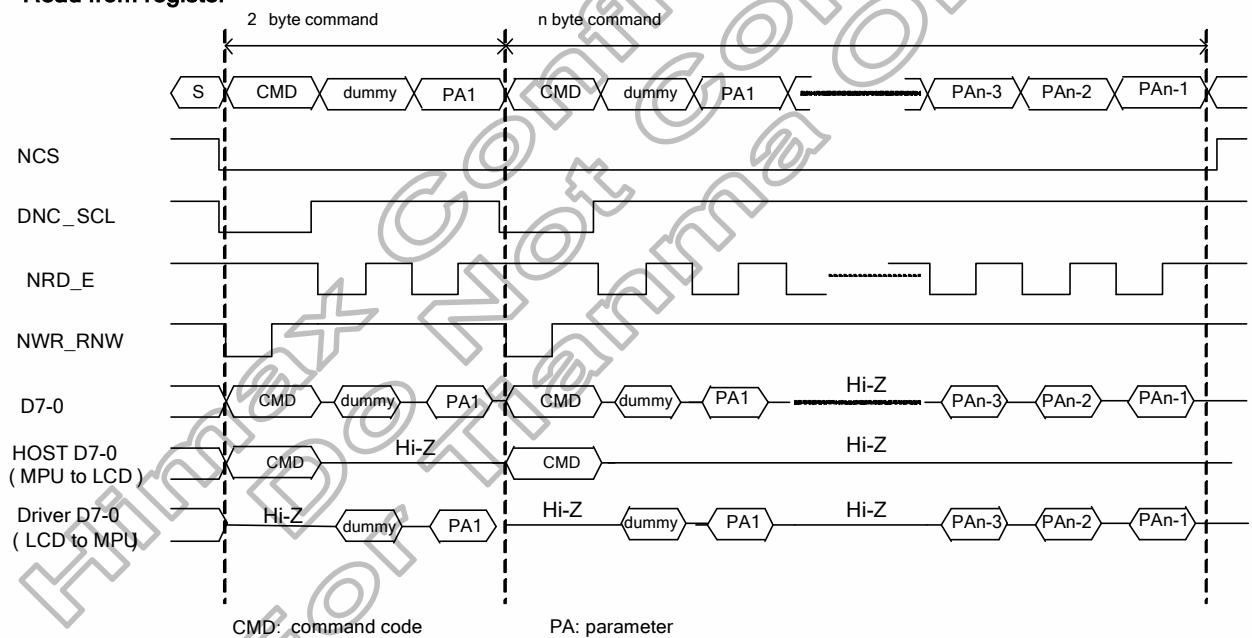Write to register**Read from register****Figure 5. 1 Register Read/Write Timing in Parallel Bus System Interface (for I80 series MPU)**

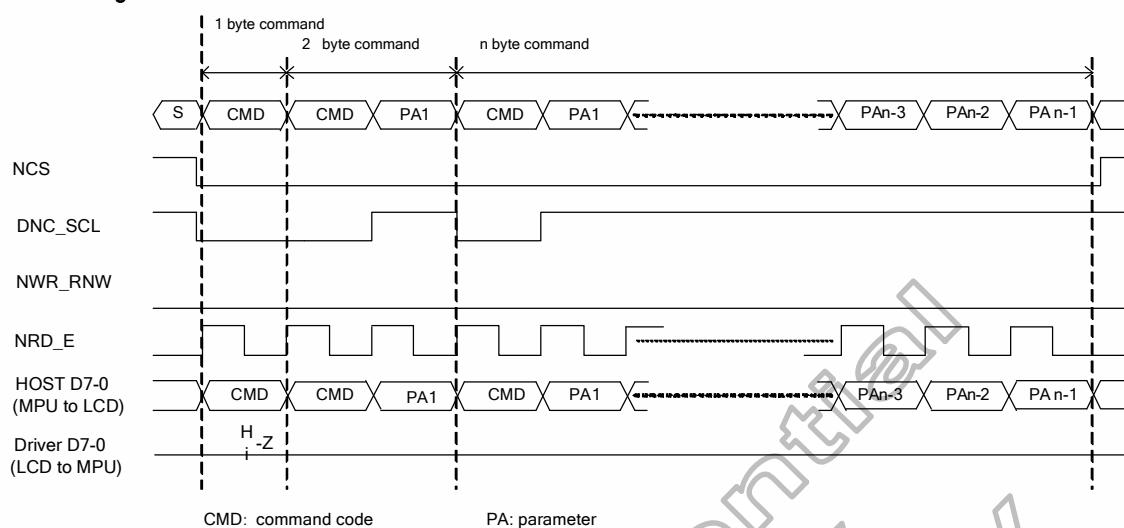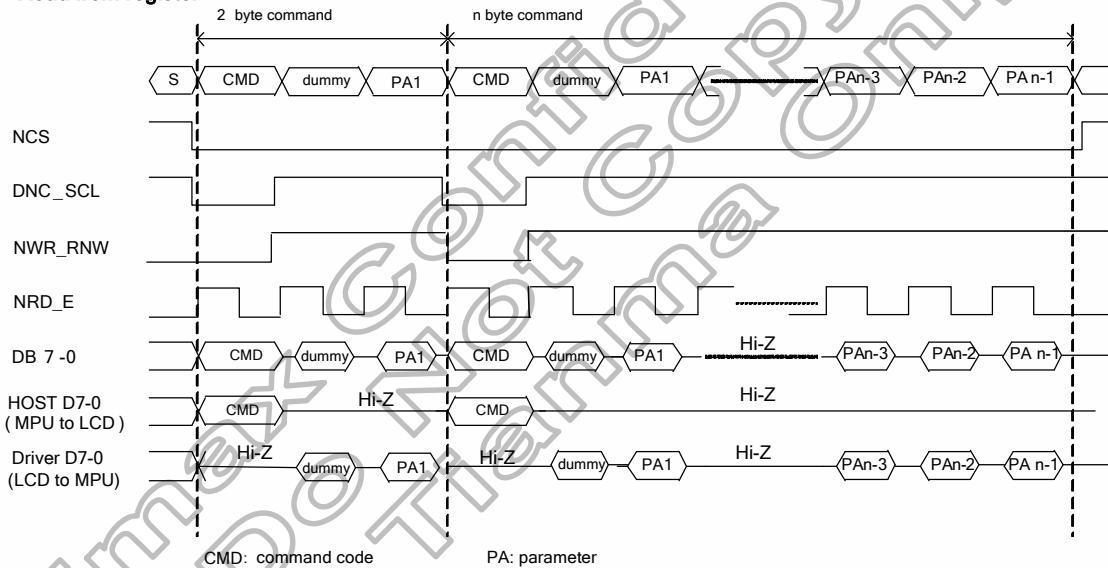Write to register**Read from register****Figure 5. 2 Register Read/Write Timing in Parallel Bus System Interface (for M68 series MPU)**

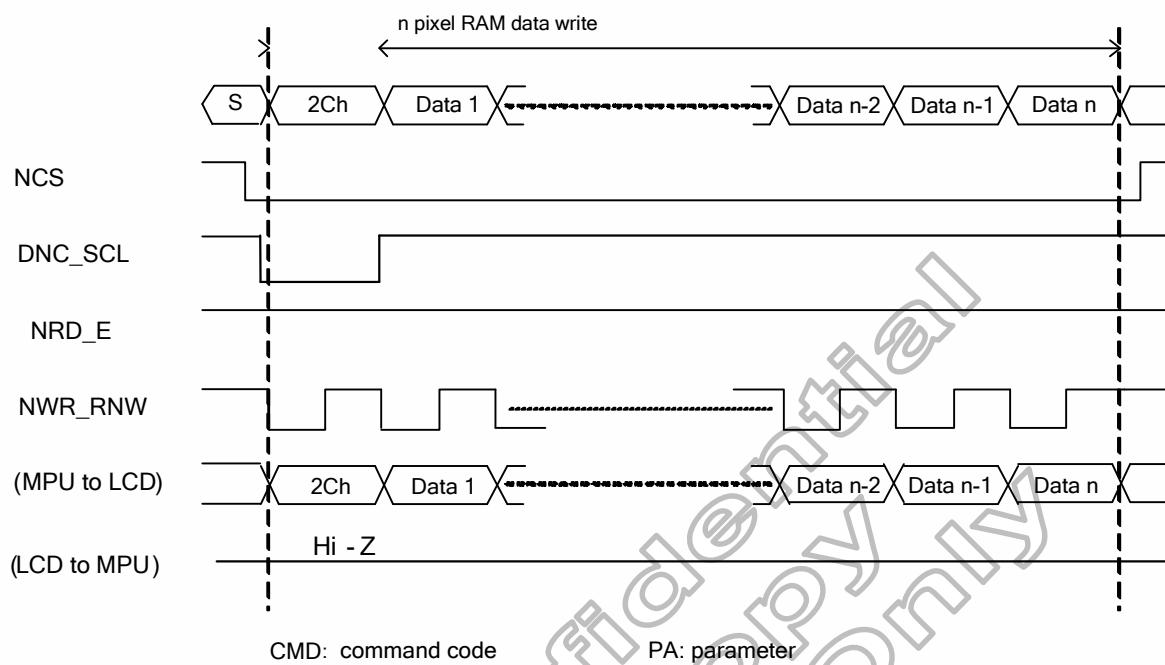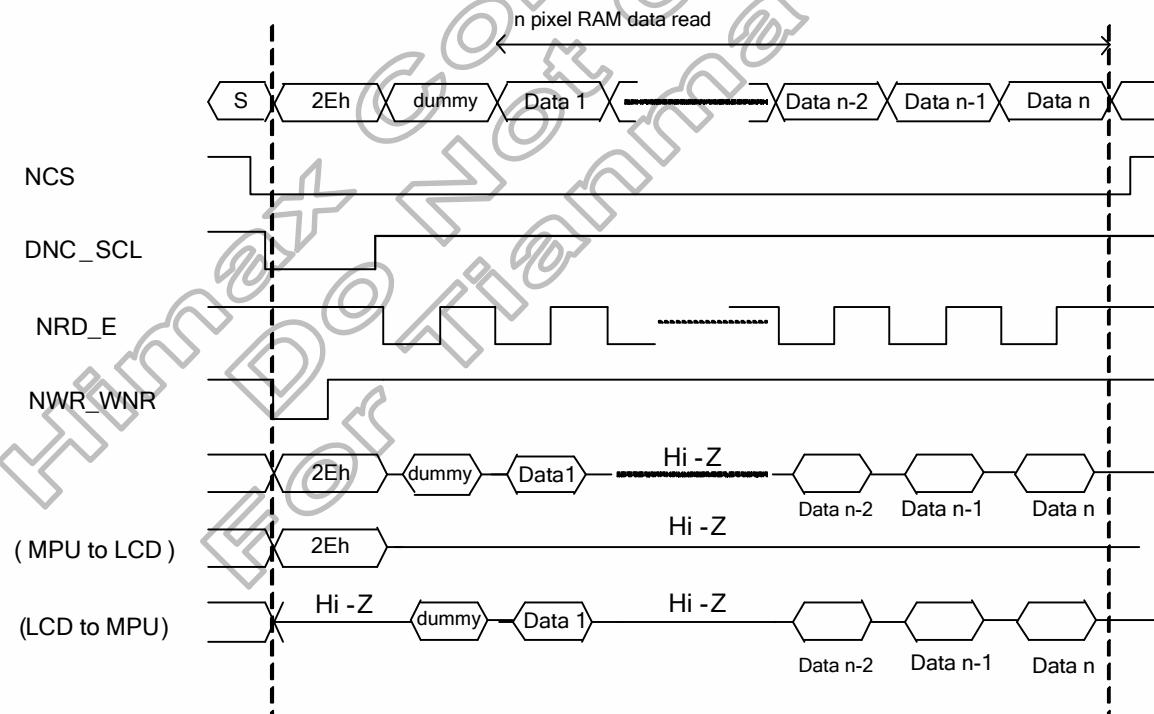Write to GRAM**Read from GRAM****Figure 5. 3 GRAM Read/Write Timing in Parallel Bus System Interface (for I80 series MPU)**

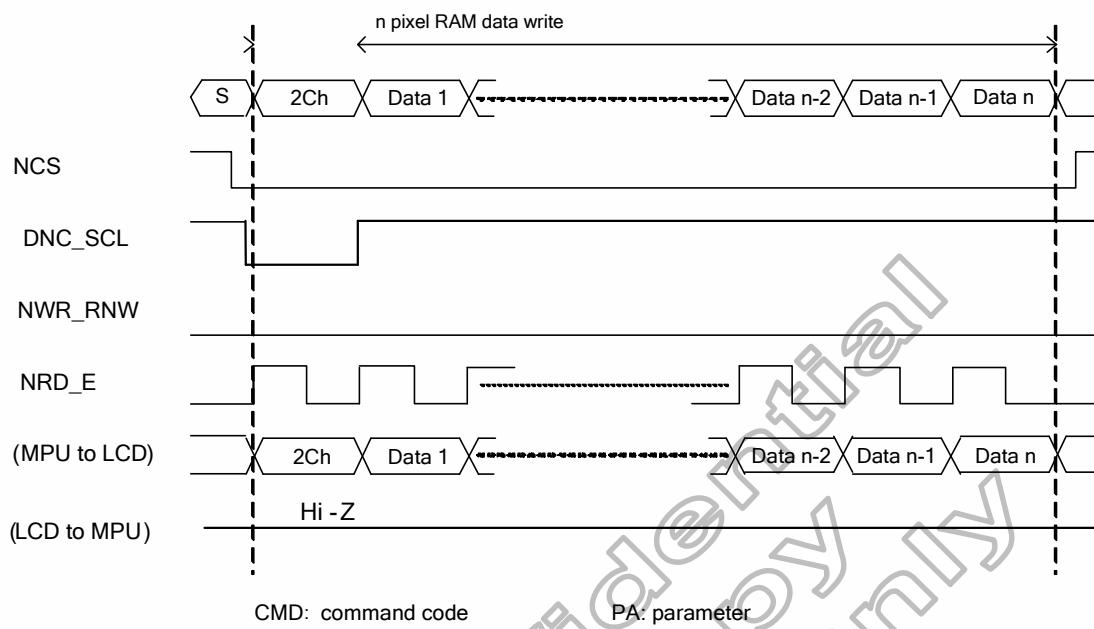
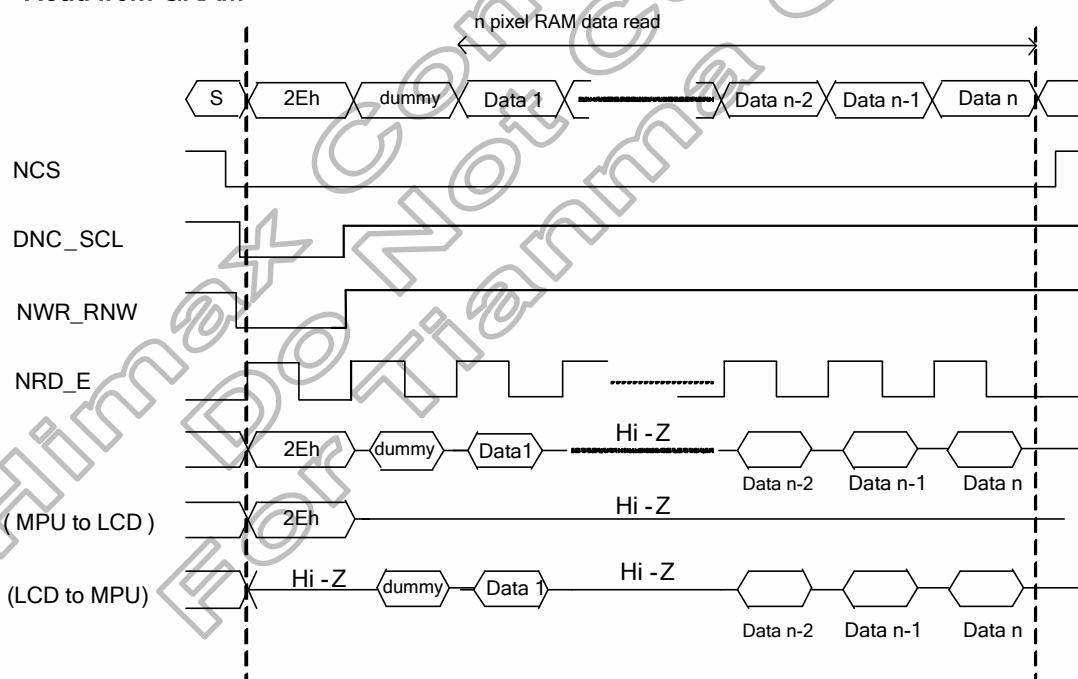
Write to GRAM**Read from GRAM**

Figure 5.4 GRAM Read/Write Timing in Parallel Bus System Interface (for M68 series MPU)

8-bit bus Interface

The I80-system 8-bit parallel bus interface can be used by setting external pins "P68, BS2, BS1, BS0" pins to "0100". And the M68-system 8-bit parallel bus interface can be used by setting "P68, BS2, BS1, and BS0" pins to "1100". Figure 5.5 is the example of interface with I80/M68 microcomputer system interface and Figure 5.6 ~Figure 5.9 is bit format per pixel color order.

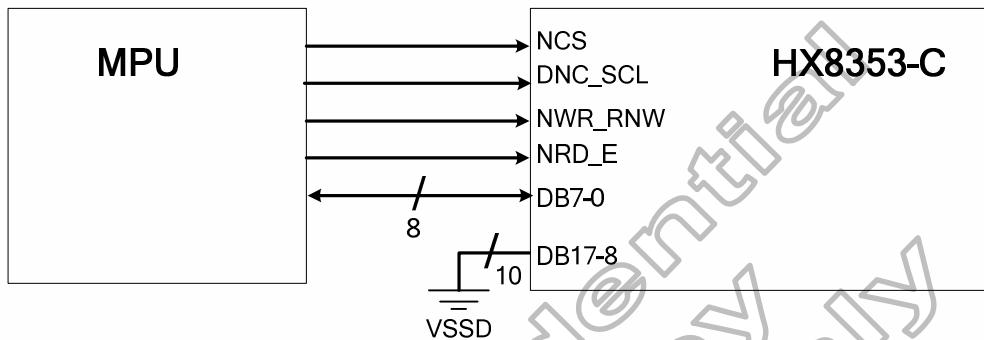


Figure 5. 5 Example of 80- / 68- System 8-bit bus Interface

The data format of write display data at 8-bit bus Interface. See Figure 5.6 ~Figure 5.9.

262k Color Data	DNC/RS	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code								-
1st write	1	R15	R14	R13	R12	R11	R10	x	x	-
2nd write	1	G15	G14	G13	G12	G11	G10	x	x	-
3rd write	1	B15	B14	B13	B12	B11	B10	x	x	1st pixel (R1/G1/B1)
4th write	1	R25	R24	R23	R22	R21	R20	x	x	-
5th write	1	G25	G24	G23	G22	G21	G20	x	x	-
6th write	1	B25	B24	B23	B22	B21	B20	x	x	2nd pixel (R2/G2/B2)



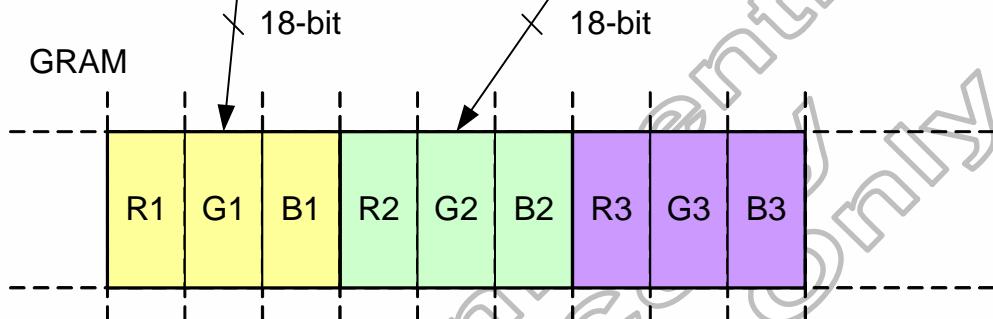


Figure 5. 6 Write data for RGB 6-6-6-bits input (support DMIF-S43AP-J124 and LUT_EN=1)

4k Color Data	DNC/RS	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code								
1st write	1	R13	R12	R11	R10	G13	G12	G11	G10	-
2nd write	1	B13	B12	B11	B10	R23	R22	R21	R20	1st pixel (R1/G1/B1)
3rd write	1	G23	G22	G21	G20	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

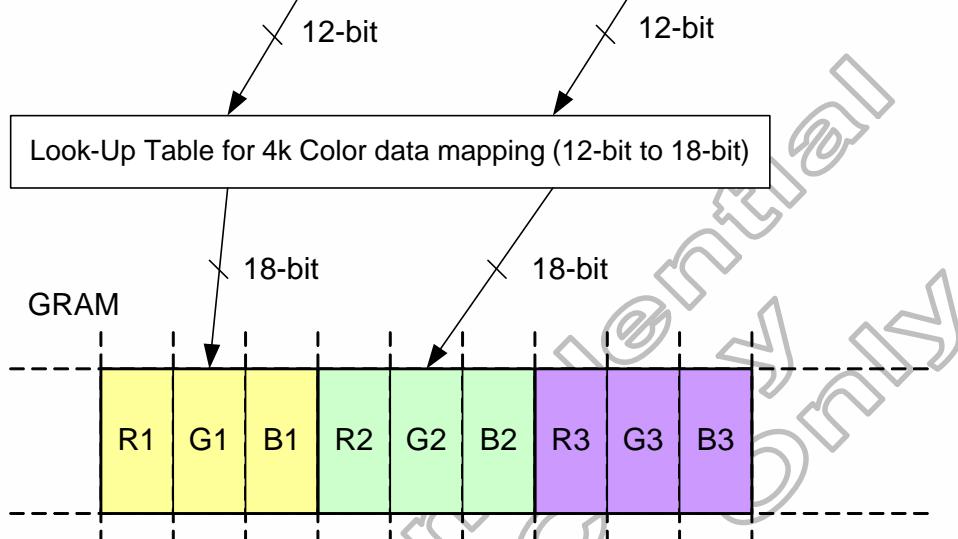

4k Color Data	DNC/RS	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code								
1st write	1	R13	R12	R11	R10	G13	G12	G11	G10	-
2nd write	1	B13	B12	B11	B10	R23	R22	R21	R20	1st pixel (R1/G1/B1)
MEMWR	0	The other command								
MEMWR	0	GRAM Write command code								
1st write	1	R23	R22	R21	R20	G23	G22	G21	G20	-
2nd write	1	B23	B22	B21	B20	R33	R32	R31	R30	2nd pixel (R2/G2/B2)
3rd write	1	G33	G32	G31	G30	B33	B32	B31	B30	3rd pixel (R3/G3/B3)

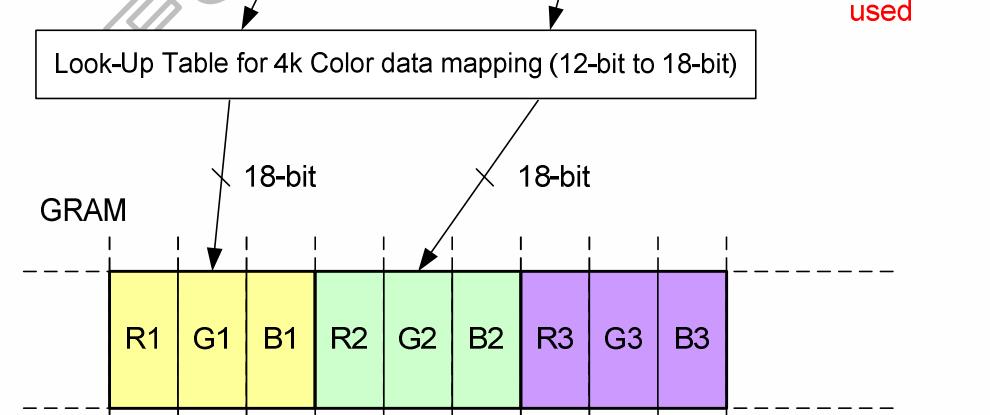

The diagram illustrates the data flow for writing RGB 4-4-4-bit data into GRAM. The input bits D7-D0 are mapped through a LUT to produce 18-bit values, which are then written into the GRAM. The GRAM is represented as a 10-bit wide memory with columns labeled R1, G1, B1, R2, G2, B2, R3, G3, B3. A red arrow points from the LUT output to the GRAM, with the text "R23~R20 will be late and are not used".

Figure 5.7 Write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)

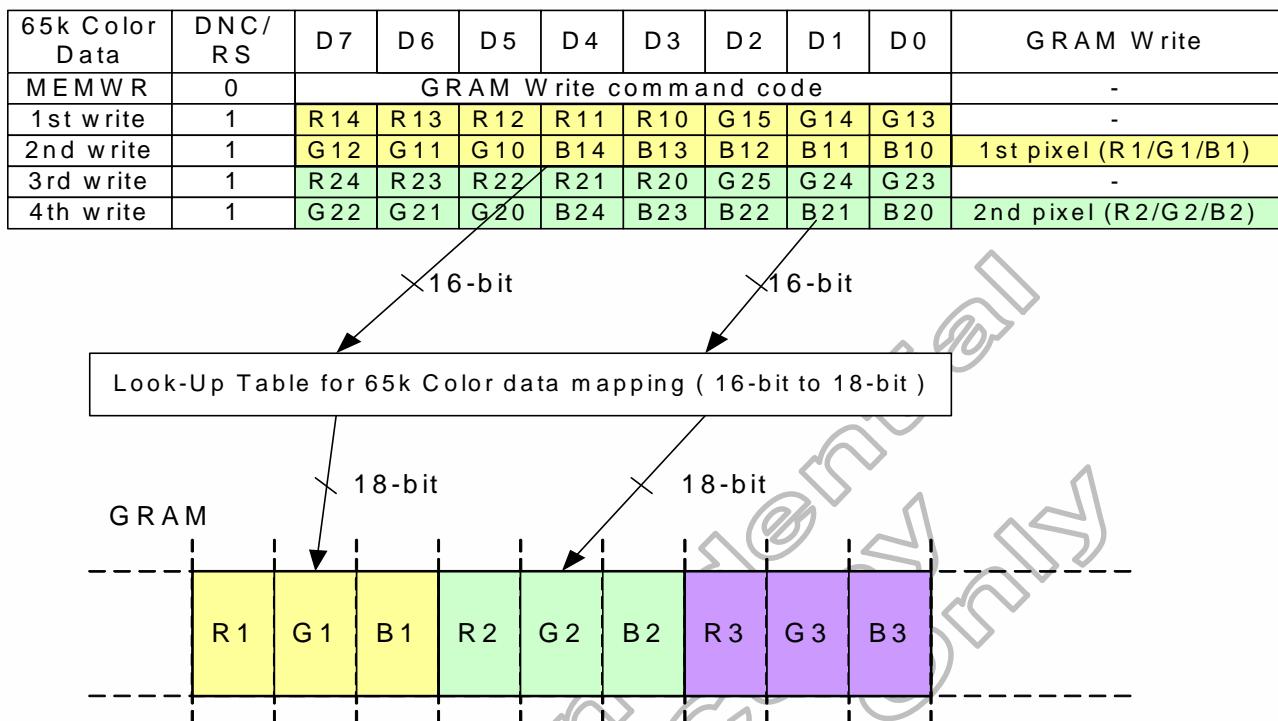


Figure 5.8 Write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)

16-bit Parallel Bus System Interface

The I80-system 16-bit parallel bus interface in command-parameter interface mode can be used by setting external pins “P68, BS2, BS1, BS0” pins to “0101”. And the M68-system 16-bit parallel bus interface in MPU interface mode can be used by setting “P68, BS2, BS1” pins to “1101”. The Figure 5.9 is the example of interface with I80/M68 microcomputer system interface. There are three types of data format to write display data at 18-bit bus Interface. See Figure 5.10 Figure 5.12.

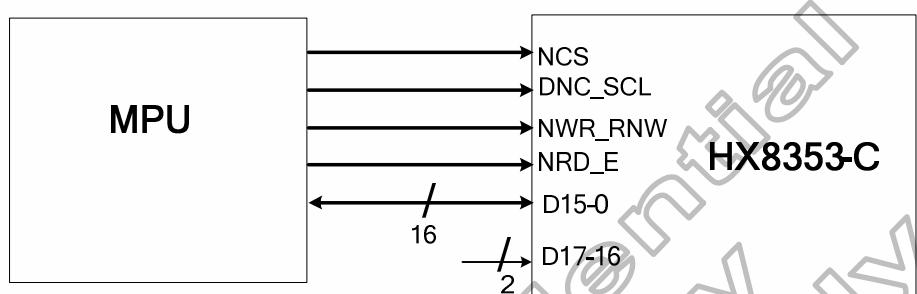


Figure 5. 9 Example of I80- / M68- System 16-bit Parallel Bus Interface

	DNC_SCL	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	x	x	x	x	x	x	x	x								-	
1 st write	1	R15	R14	R13	R12	R11	R10	x	x	G15	G14	G13	G12	G11	G10	x	-	
2 nd write	1	B15	B14	B13	B12	B11	B10	x	x	R25	R24	R23	R22	R21	R20	x	1st pixel (R1/G1/B1)	
3 rd write	1	G25	G24	G23	G22	G21	G20	x	x	B25	B24	B23	B22	B21	B20	x	2nd pixel (R2/G2/B2)	

X : Don't care

Figure 5. 10 GRAM Write Data for RGB 6-6-6-(262k colours) bits input (LUT_EN=1)

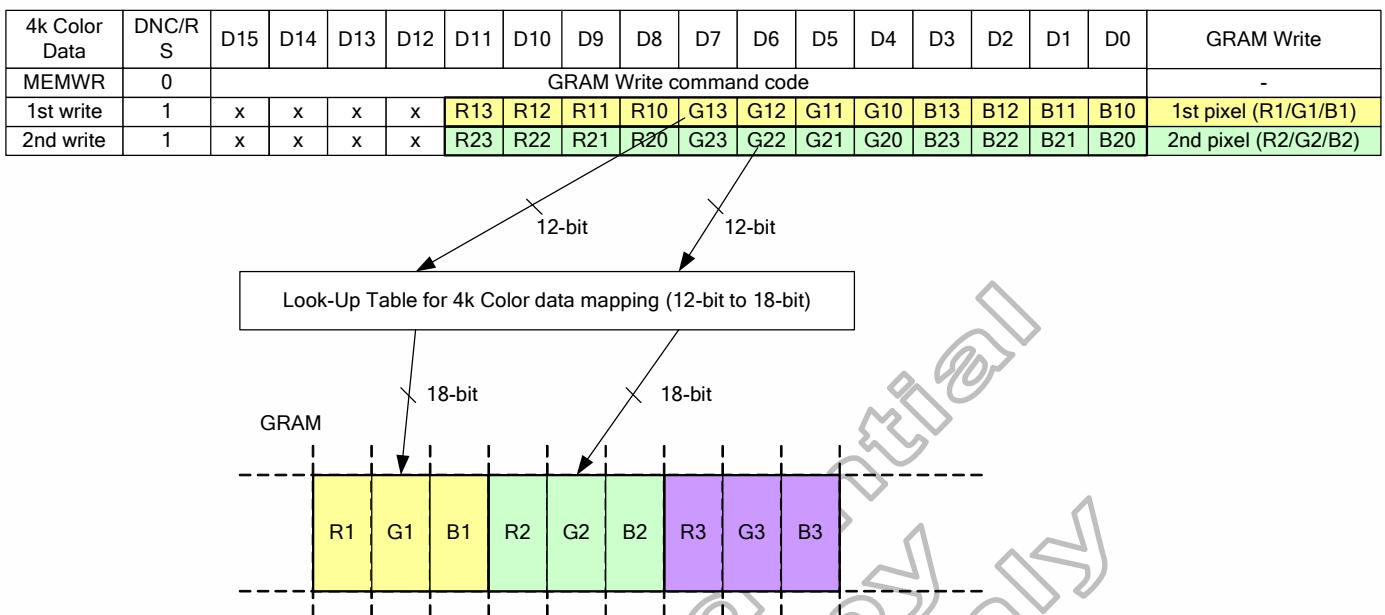


Figure 5. 11 Write data for RGB 4-4-4 (4k colours) bits input on 16-bit parallel Interface (when support Look-up table and LUT_EN=0)

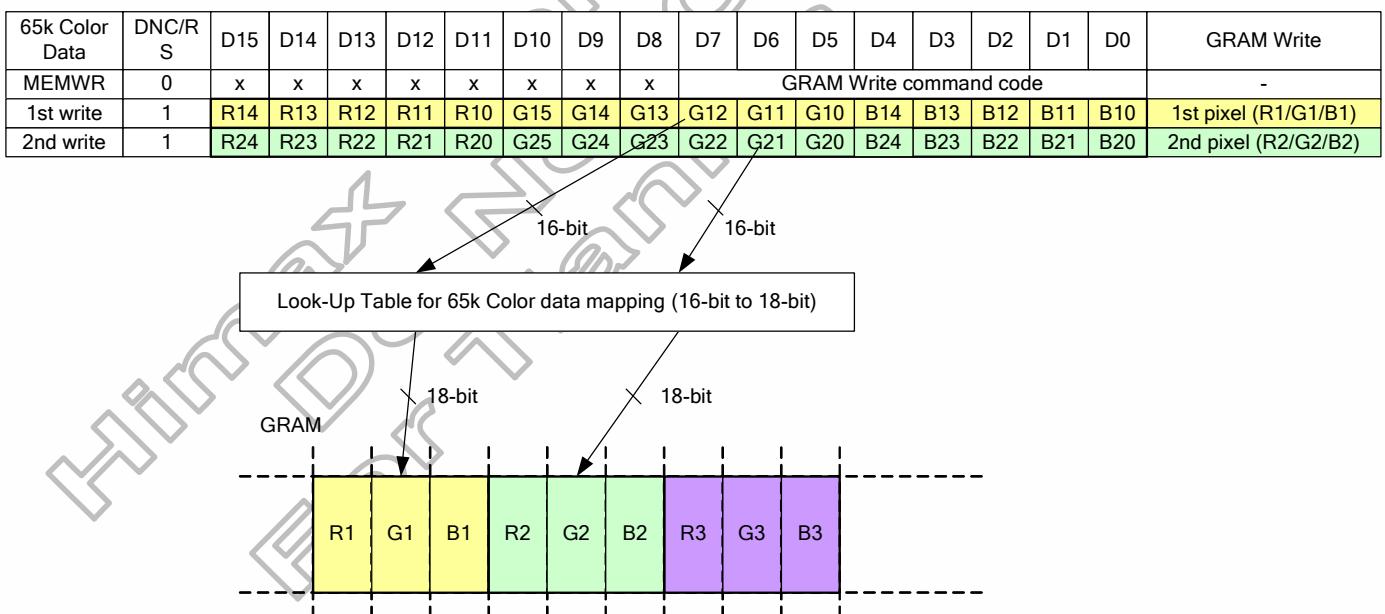


Figure 5. 12 Write data for RGB 5-6-5 (65k colours) bits input on 16-bit parallel Interface (when support Look-up table and LUT_EN=0)

18-bit Parallel Bus System Interface

The I80-system 18-bit parallel bus interface in MPU interface mode can be used by setting external pins “P68, BS2, BS1, BS0” pins to “0111”. And the M68-system 18-bit parallel bus interface in MPU interface mode can be used by setting “P68, BS2, BS1, BS0” pins to “1111”. The Figure5.13 is the example of interface with I80/M68 microcomputer system interface.

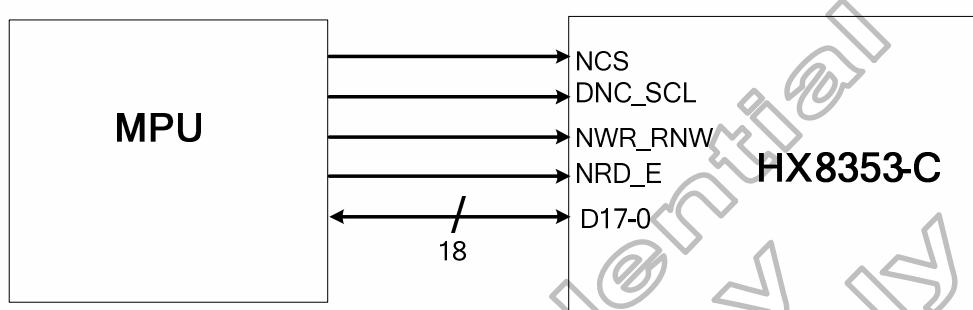


Figure 5. 13 Example of I80- / M68- System 18-bit Parallel Bus Interface

There are three types of data format to write display data at 18-bit bus Interface. See Figure 5.14 ~ Figure 5. 16.

4k Color Data	DNC/RS	D17	D16	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0																			-
1st write	1	x	x	x	x	x	x	R1 ₃	R1 ₂	R1 ₁	R1 ₀	G1 ₃	G1 ₂	G1 ₁	G1 ₀	B1 ₃	B1 ₂	B1 ₁	B1 ₀	1st pixel (R1/G1/B1)
2nd write	1	x	x	x	x	x	x	R2 ₃	R2 ₂	R2 ₁	R2 ₀	G2 ₃	G2 ₂	G2 ₁	G2 ₀	B2 ₃	B2 ₂	B2 ₁	B2 ₀	2nd pixel (R2/G2/B2)

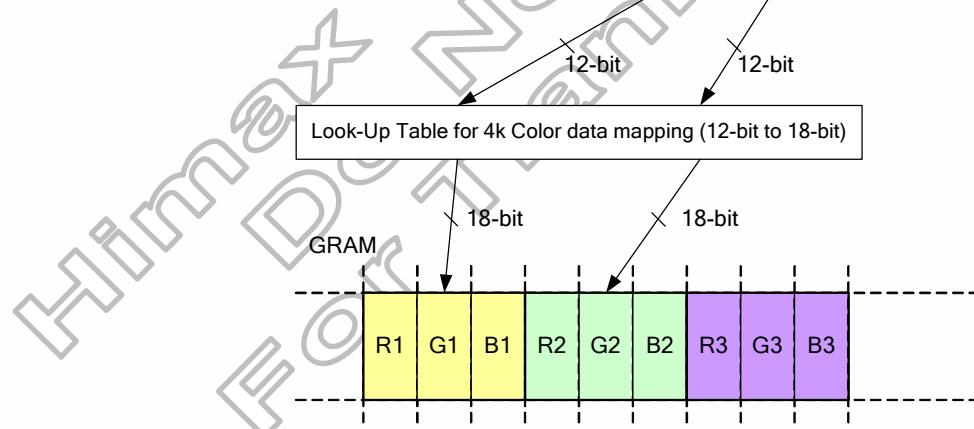


Figure 5. 14 Write data for RGB 4-4-4 (4k colours) bits input in 18-bit parallel Interface (when support Look-up table and LUTENB=0)

65k Color Data	DNC/RS	D17	D16	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code																-		
1st write	1	x	x	R14	R13	R12	R11	R10	G15	G14	G13	G12	G11	G10	B14	B13	B12	B11	B10	1st pixel (R1/G1/B1)
2nd write	1	x	x	R24	R23	R22	R21	R20	G25	G24	G23	G22	G21	G20	B24	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

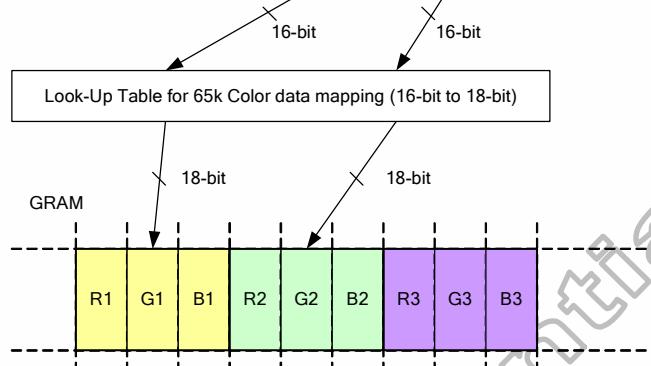


Figure 5. 15 Write data for RGB 5-6-5 (65k colours) bits input in 18-bit parallel Interface (when support Look-up table and LUT_EN=0)

262k Color Data	DNC/RS	D17	D16	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code																-		
1st write	1	R15	R14	R13	R12	R11	R10	G15	G14	G13	G12	G11	G10	B15	B14	B13	B12	B11	B10	1st pixel (R1/G1/B1)
2nd write	1	R25	R24	R23	R22	R21	R20	G25	G24	G23	G22	G21	G20	B25	B24	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

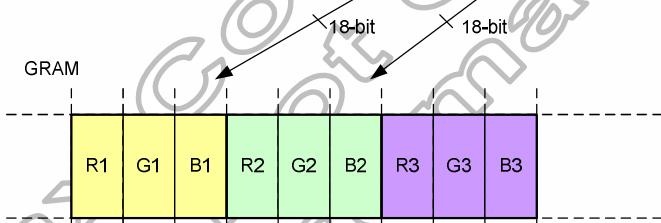


Figure 5. 16 Write data for RGB 6-6-6(262k colours) bits input in 18-bit parallel Interface (LUT_EN=1)

9-bit Bus Interface

The I80-system 9-bit parallel bus interface in MPU interface mode can be used by setting external pins “P68, BS2, BS1, BS0” pins to “0110”. And the M68-system 9-bit parallel bus interface in MPU interface mode can be used by setting “P68, BS2, BS1, BS0” pins to “1110”. The Figure5.13 is the example of interface with I80/M68 microcomputer system interface.

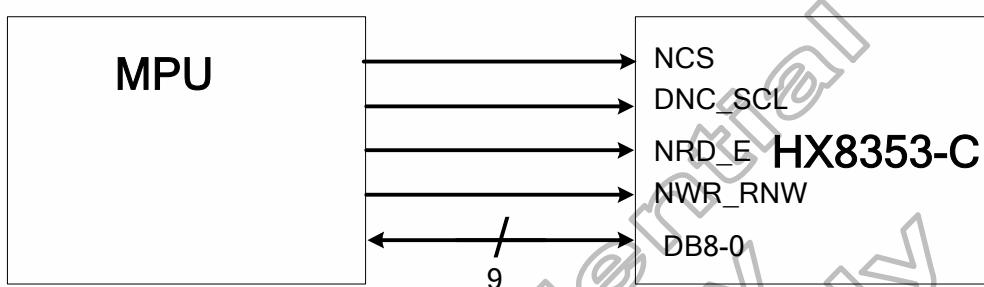


Figure 5. 17 Example of 80- / 68- System 9-bit bus Interface

There are five types data format to write display data at 9-bit bus Interface. See Figure 5. 18 ~ Figure 5. 22

4k Color Data	DNC	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code									
1st write	1	x	R13	R12	R11	R10	G13	G12	G11	G10	-
2nd write	1	x	B13	B12	B11	B10	R23	R22	R21	R20	1st pixel (R1/G1/B1)
3rd write	1	x	G23	G22	G21	G20	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

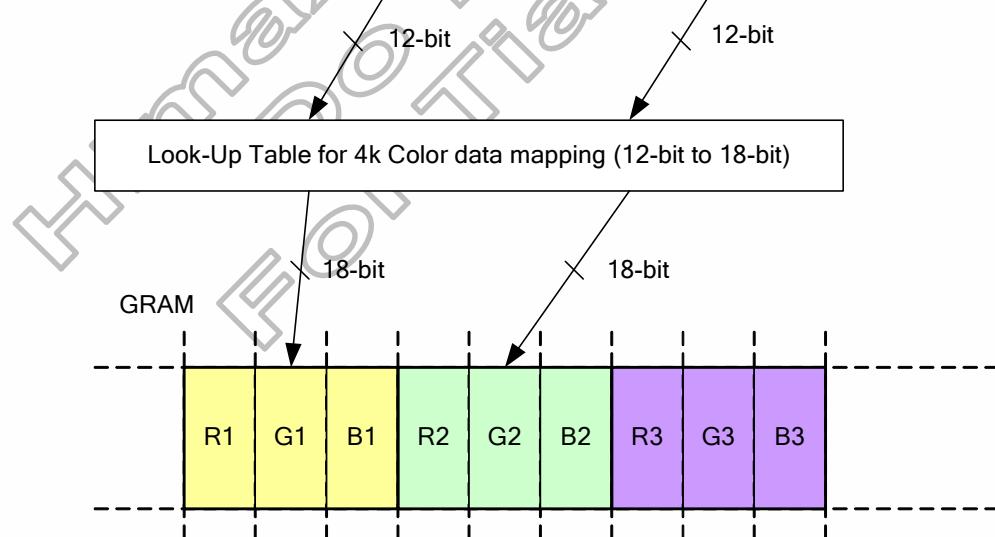


Figure 5. 18 Write data for RGB 4-4-4 (4k colours) bits input in 9-bit parallel Interface (when support Look-up table and LUT_EN=0)

65k Color Data	DNC	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code									
1st write	1	x	R14	R13	R12	R11	R10	G15	G14	G13	-
2nd write	1	x	G12	G11	G10	B14	B13	B12	B11	B10	1st pixel (R1/G1/B1)
3rd write	1	x	R24	R23	R22	R21	R20	G25	G24	G23	-
4th write	1	x	G22	G21	G20	B24	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

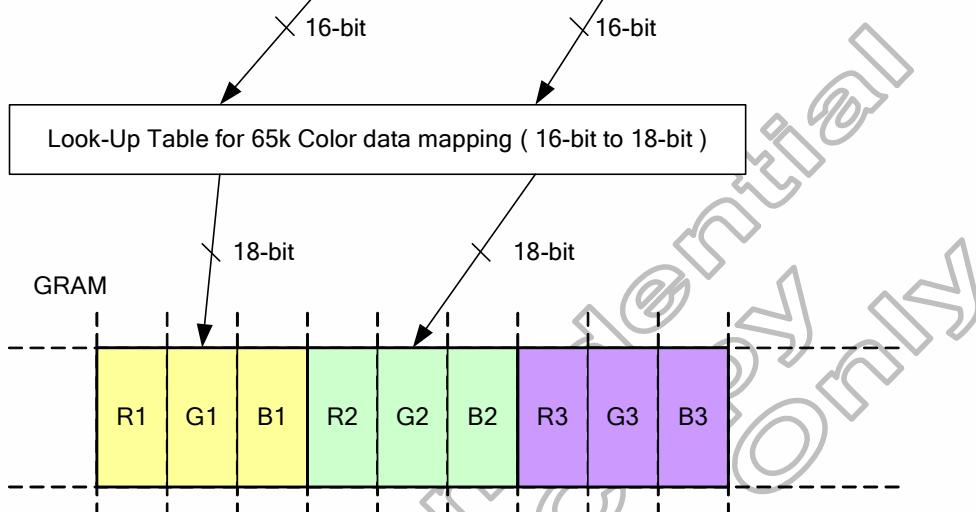


Figure 5. 19 Write data for RGB 5-6-5(65k colours) bits input in 9-bit parallel Interface (when support Look-up table and LUT_EN=0)

262k Color Data	DNC	D8	D7	D6	D5	D4	D3	D2	D1	D0	GRAM Write
MEMWR	0	GRAM Write command code									
1st write	1	R15	R14	R13	R12	R11	R10	G15	G14	G13	-
2nd write	1	G12	G11	G10	B15	B14	B13	B12	B11	B10	1st pixel (R1/G1/B1)
3rd write	1	R25	R24	R23	R22	R21	R20	G25	G24	G23	-
4th write	1	G22	G21	G20	B25	B24	B23	B22	B21	B20	2nd pixel (R2/G2/B2)

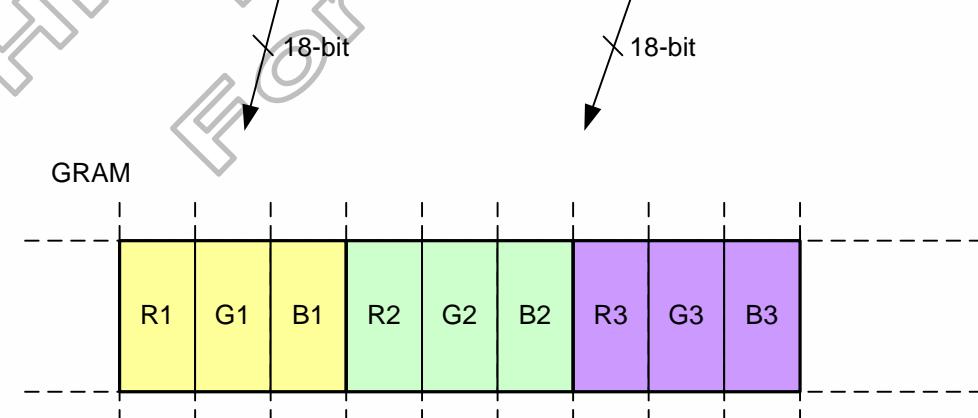


Figure 5. 20 Write data for RGB 6-6-6-bits (262k colours) input in 9-bit parallel Interface (LUT_EN=1)


5.1.2 Serial Interface

The HX8353-C supports serial data transfer interface. The interface selection by setting BS2=0 for serial interface mode. The 3 wires serial bus and 4 wires serial bus is select by SPI_SEL pin. When SPI_SEL pin is low (VSSD), it is selected by 3 wires serial bus and use: chip select line (NCS), serial input/output data (SDA), and the serial transfer clock line (DNC_SCL). When SPI_SEL pin is high (VDDI), it is selected by 4 wires serial bus and use: chip select line (NCS), serial input/output data (SDA), and the serial transfer clock line (DNC_SCL) and NWR_RNW.

Serial data write mode

The 3-Pin serial data packet contains a control bit DNC and a transmission byte and in 4-pin serial case, data packet contains just transmission byte and control bit DNC is transferred by NWR_RNW pin. If NWR_RNW is low, the transmission byte is command byte. If NWR_RNW is high, the transmission byte is stored to command register or GRAM. The MSB is transmitted first. The serial interface is initialized when NCS is high. In this state, DNC_SCL clock pulse or SDA data have no effect. A falling edge on NCS enables the serial interface and indicates the start of data transmission.

3 wire Serial Data Stream Format

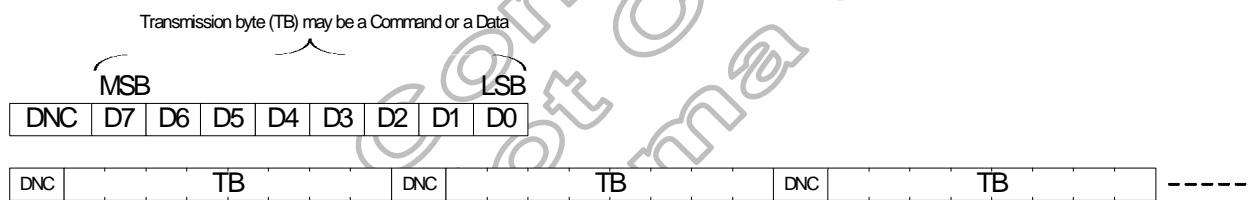

4 wire Serial Data Stream Format



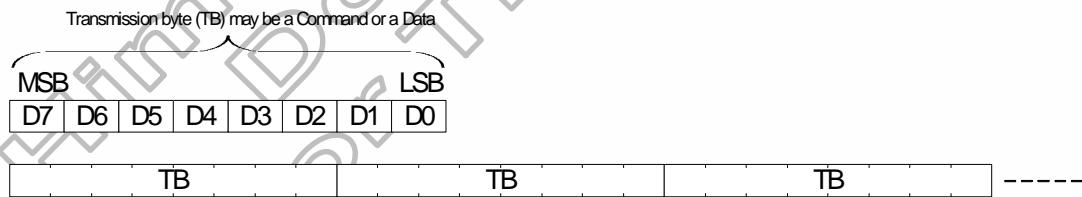


Figure 5. 21 Serial Interface protocol data stream format

3 wire Serial Interface Protocol

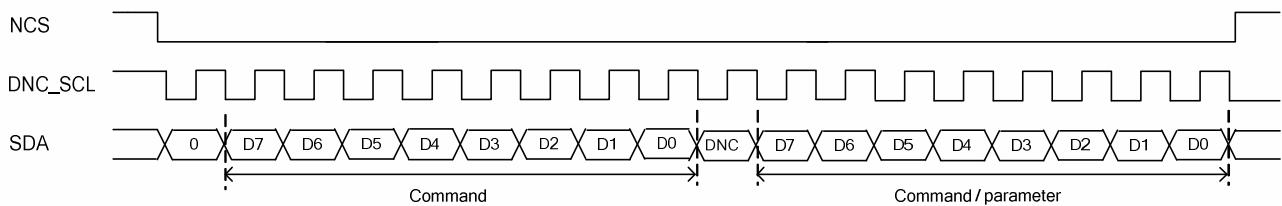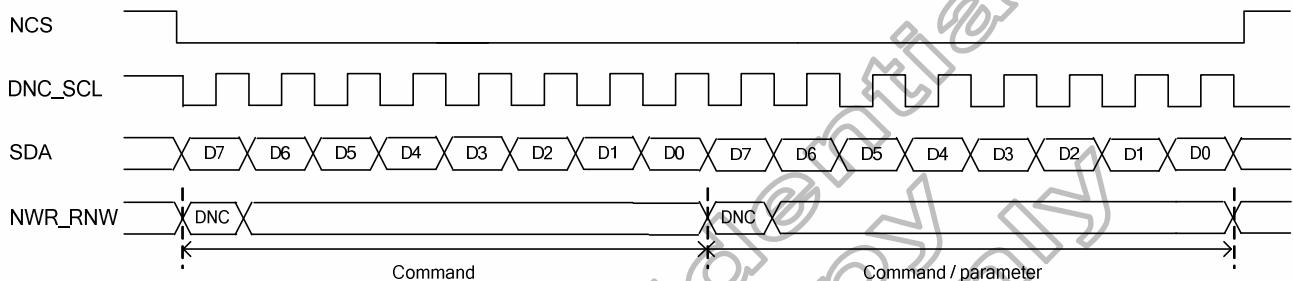

4 wire Serial Interface Protocol

**Figure 5. 22 Serial Interface protocol 3 wire/4 wire, write mode**

Serial data read mode

The micro controller first has to send a command and then the following byte is transmitted in the opposite direction. The read mode has three type command data transmitted (8- / 24- / 32-bit) is according command code.

3 Wires Serial Interface Protocol


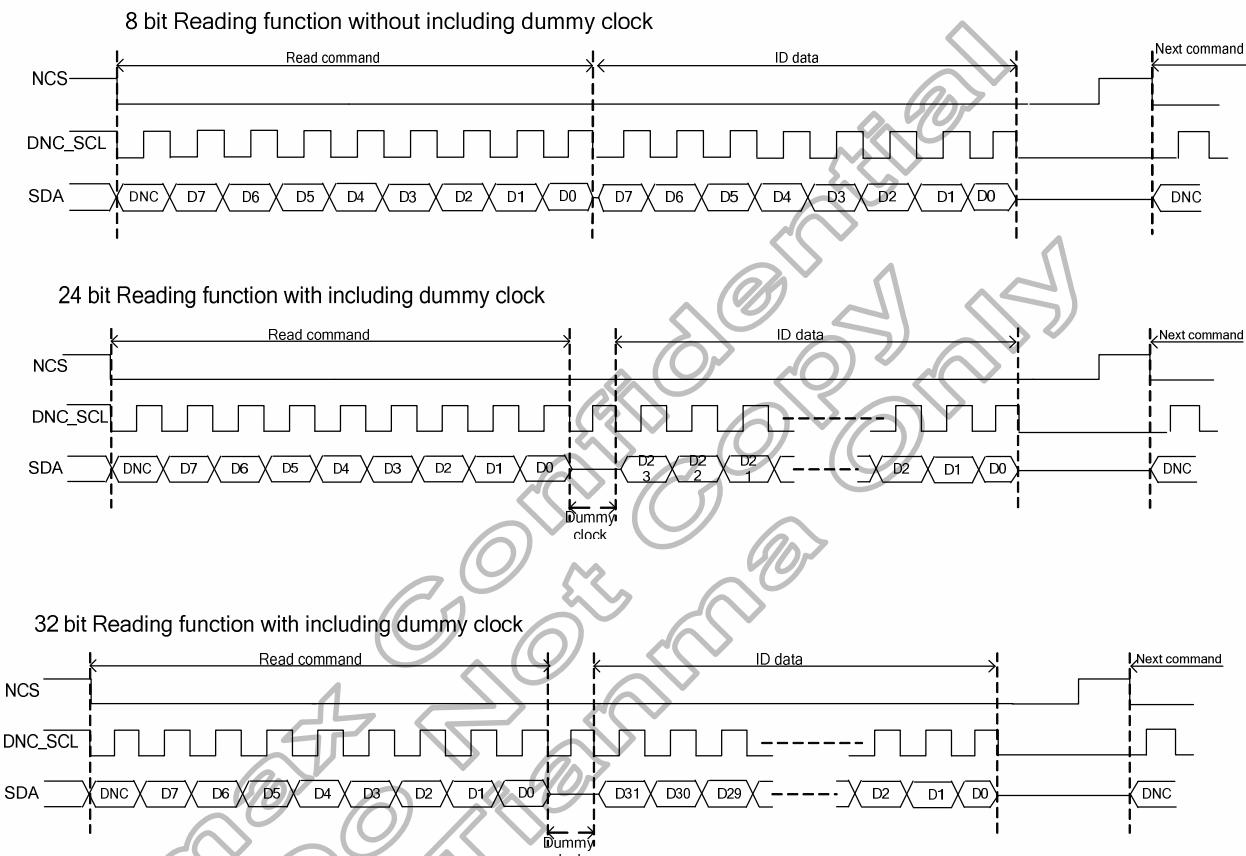



Figure 5. 23 3 Wires Serial Interface protocol, read mode

4 Wires Serial Interface Protocol

8 bit Reading function without including dummy clock

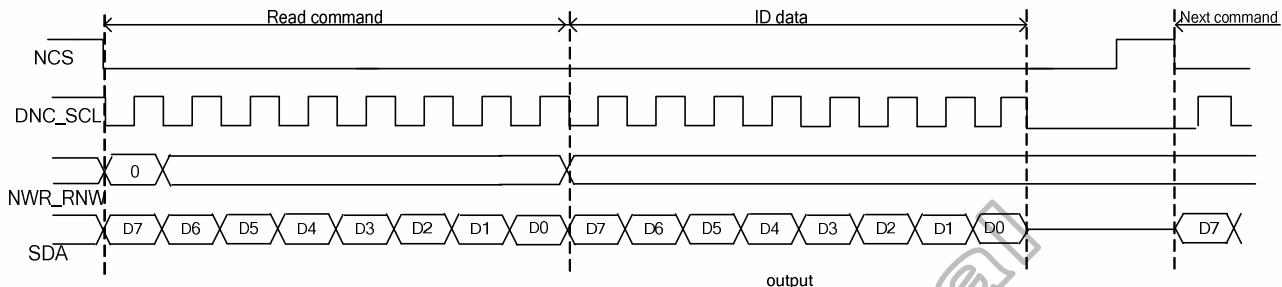

24 bit Reading function with including dummy clock

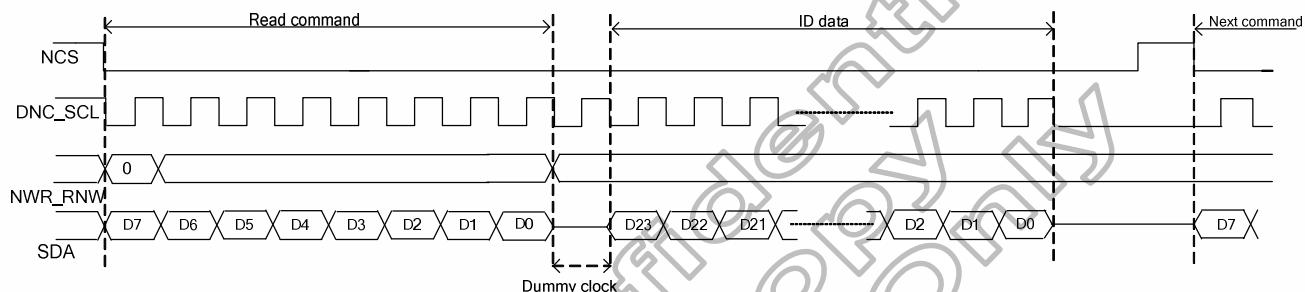

32 bit Reading function with including dummy clock

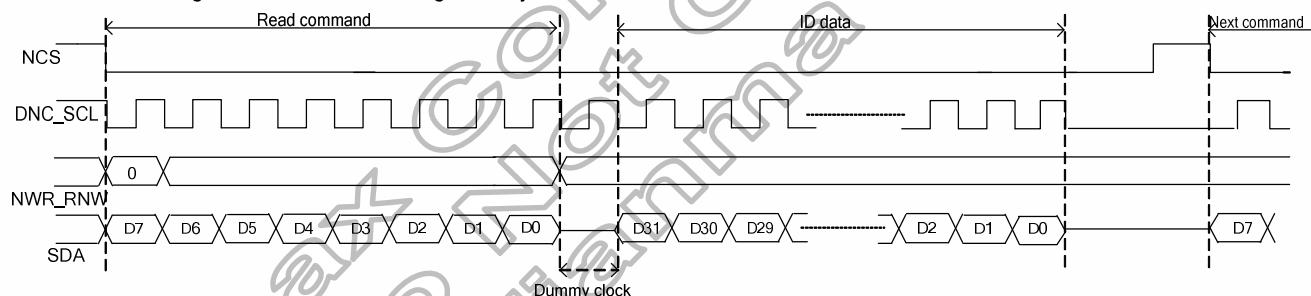


Figure 5. 24.4 wire Serial Interface protocol, read mode

There are four types of data format to write display data at Serial data bus Interface and it is the same as 8-bit bus Interface.

The data format that write display data to SRAM at Serial data bus Interface is shown as Figure5. 25 ~ Figure5. 30.

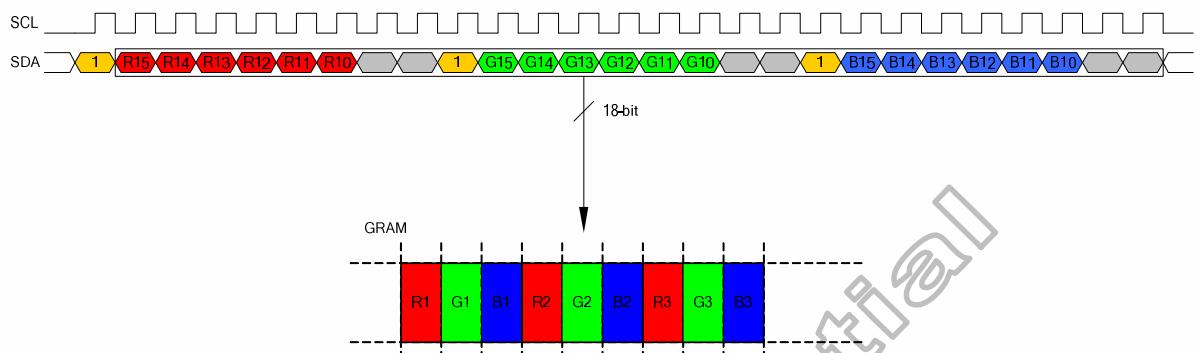


Figure 5. 25 3W Serial write data for RGB (6-6-6) bits input (LUT_EN=1)

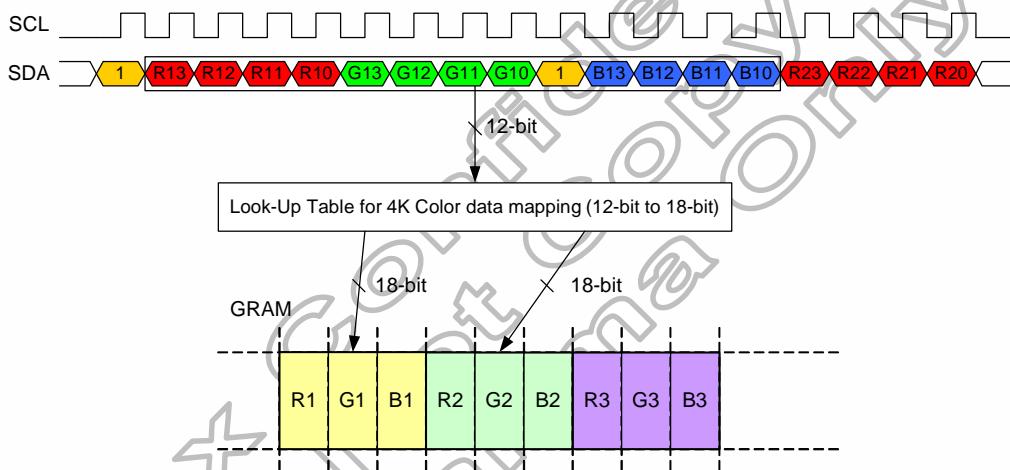


Figure 5. 26 3W Serial write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)

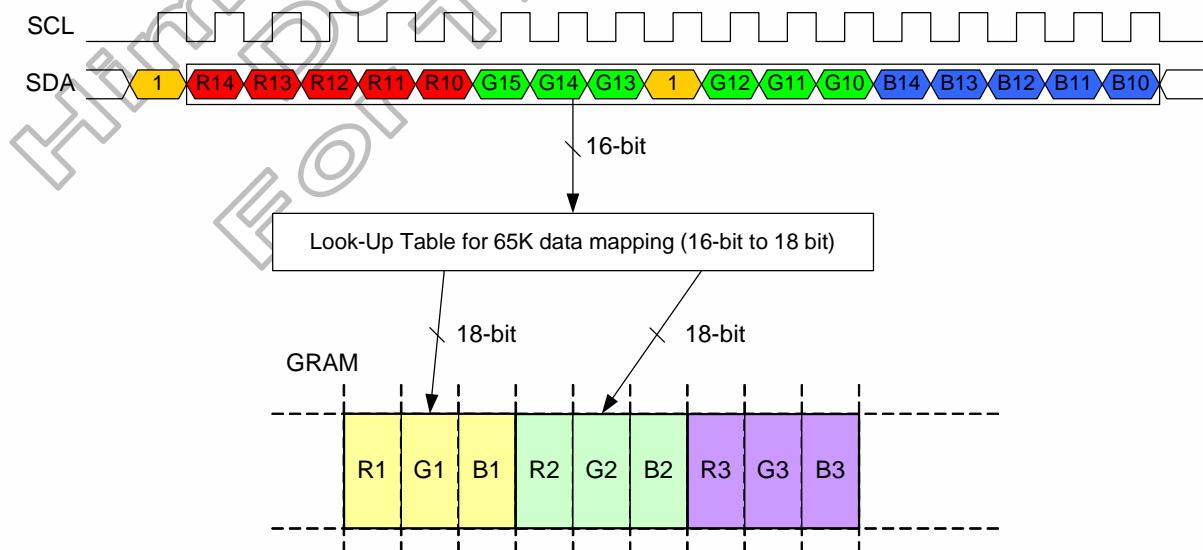
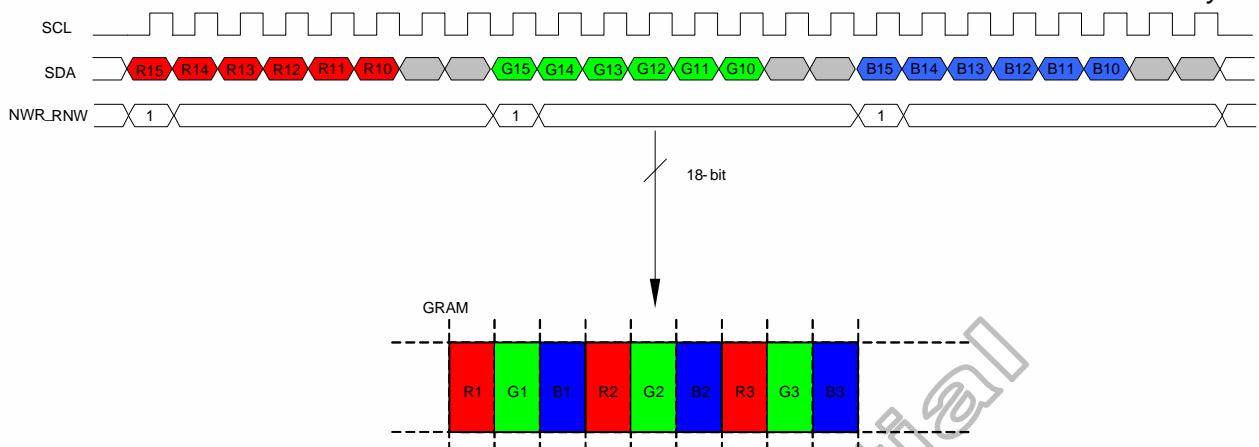
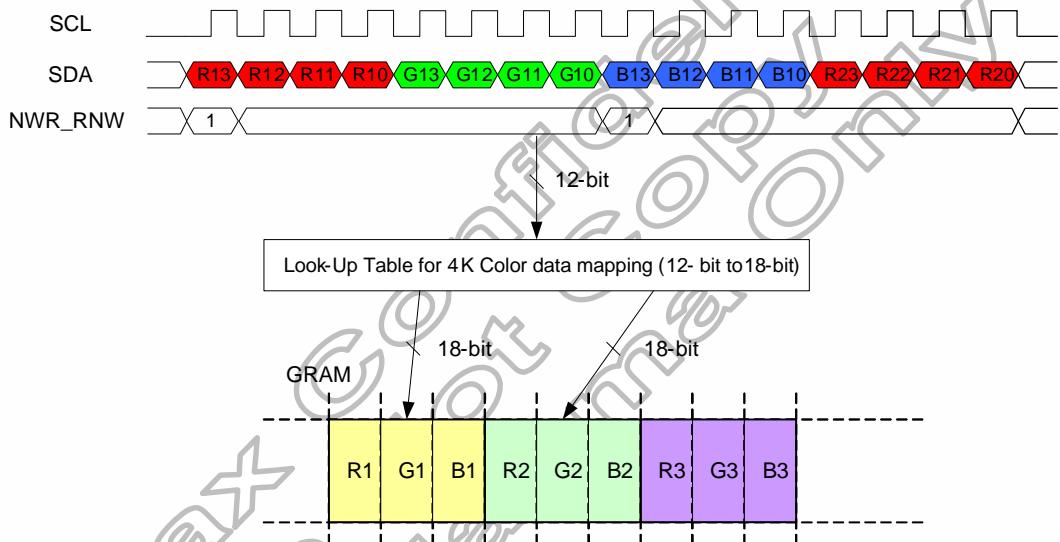
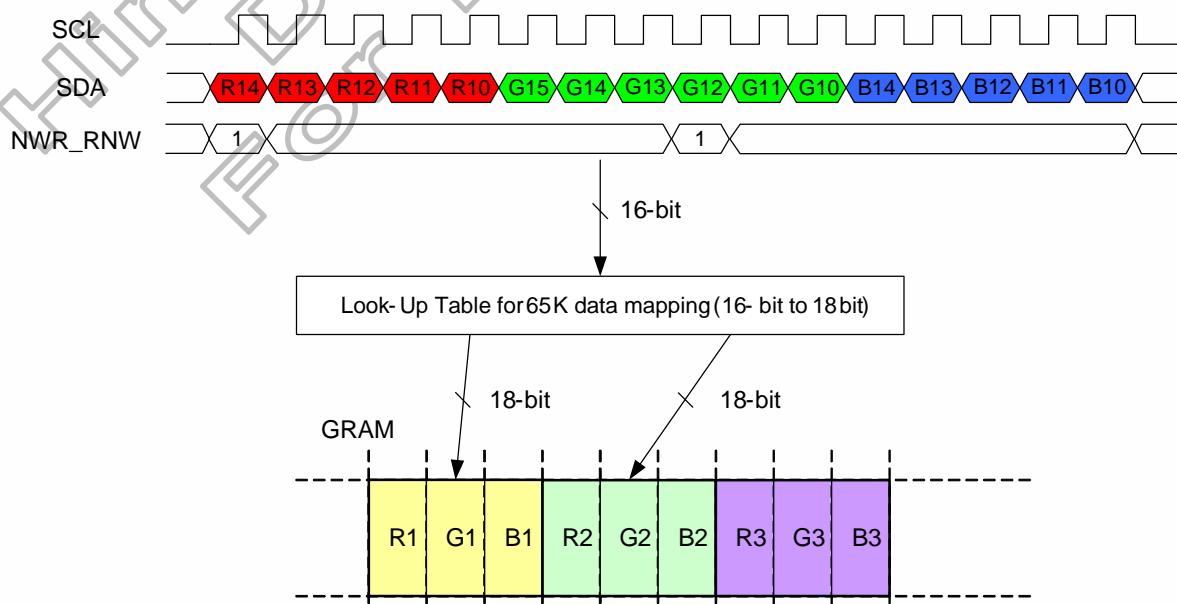


Figure 5. 27 3W Serial write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)

**Figure 5.28 4W Serial write data for RGB (6-6-6) bits input (LUT_EN=1)****Figure 5.29 4W Serial write data for RGB 4-4-4-bits input (support Look-up table and LUT_EN=0)****Figure 5.30 4W Serial write data for RGB 5-6-5-bits input (support Look-up table and LUT_EN=0)**

5.1.3 Display Module Data Transfer Recovery

If there is a break on data transmission when transmitting a command before a whole byte has been completed, then the display module will reset the interface so that it will be ready to receive the same byte re-transmitted when the chip select line (NCS) is next activated. See the following figure.


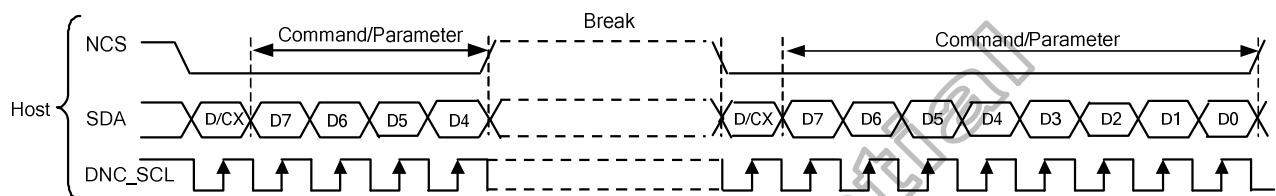


Figure 5. 31 Display Module Data Transfer Recovery


If 1 or more parameter command is being sent and a break occurs while sending any parameter before the last one and if the host then sends a new command rather than re-transmitting the parameter that was interrupted, then the parameters that were successfully sent are stored and the parameter where the break occurred is rejected. The interface is ready to receive next byte as shown:

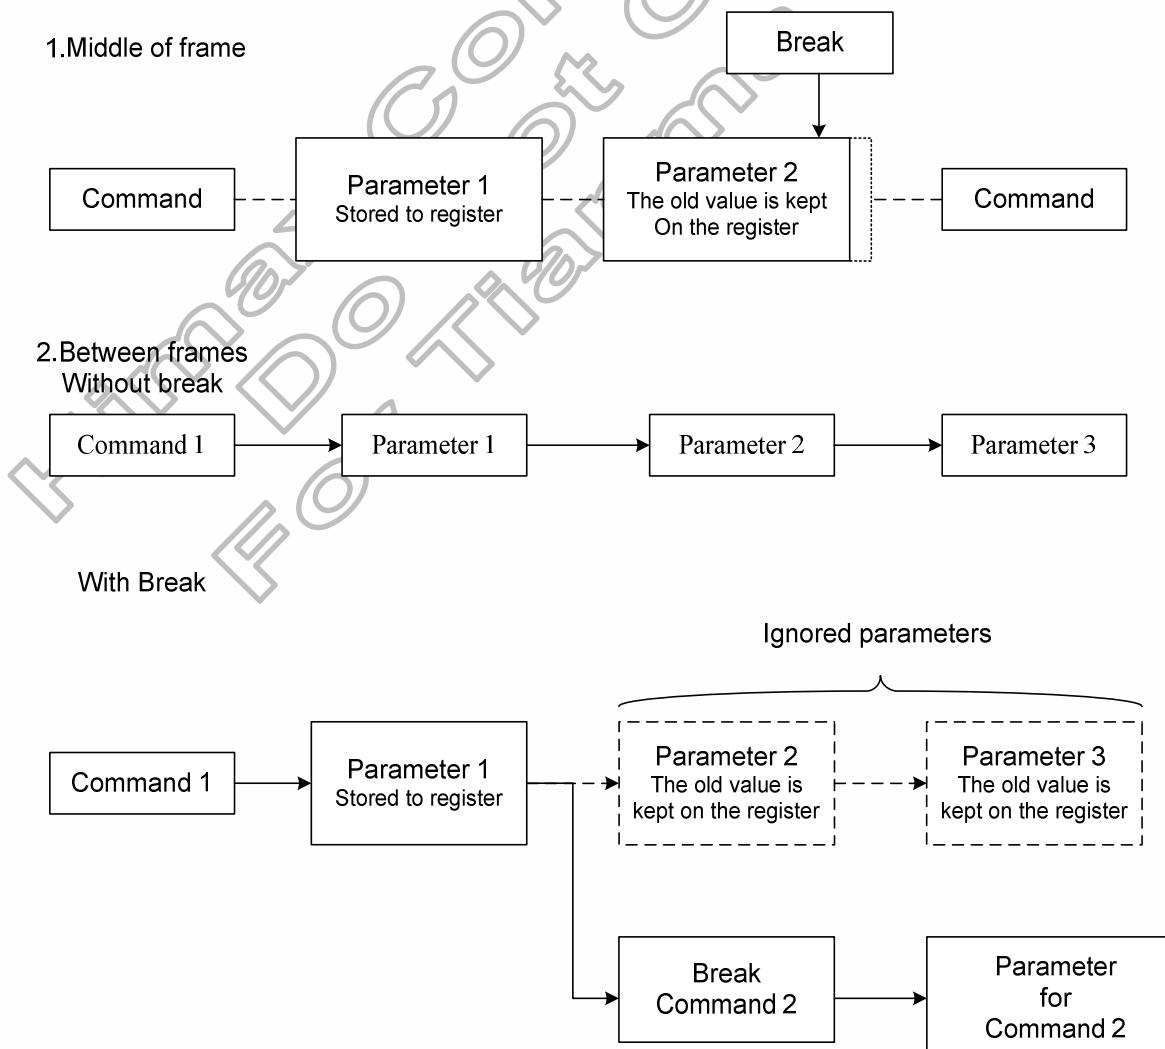

5.1.4 Display Module Data Transfer Pause

It will be possible when transferring a Command, Frame Memory Data or Multiple Parameter Data to invoke a pause in the data transmission. If the Chip Select Line is released after a whole byte of a Frame Memory Data or Multiple Parameter Data has been completed, then the Display Module will wait and continue the Frame Memory Data or Parameter Data Transmission from the point where it was paused. If the Chip Select Line is released after a whole byte of a command has been completed, then the Display Module will receive either the command's parameters (if appropriate) or a new command when the Chip Select Line is next enabled as shown below:


Serial Interface Pause

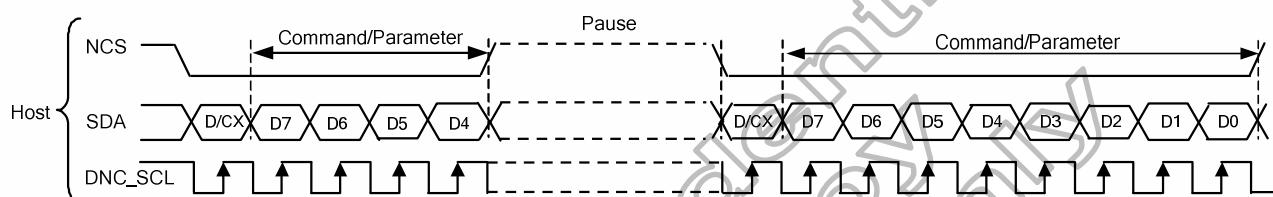

This applies to the following 4 conditions:

- Command-Pause-Command
- Command-Pause-Parameter
- Parameter-Pause-Command
- Parameter-Pause-Parameter

Parallel Interface Pause

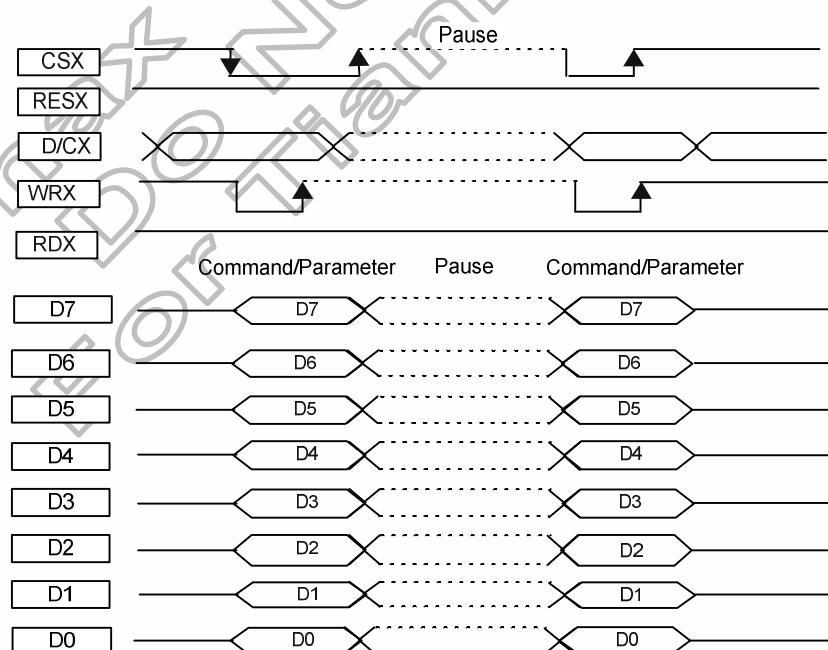

This applies to the following 4 conditions:


- Command-Pause-Command
- Command-Pause-Parameter
- Parameter-Pause-Command
- Parameter-Pause-Parameter

5.1.5 Display Module Data Transfer Modes

The Module has three colour modes for transferring data to the display RAM. These are 12-bit colour per pixel, 16-bit colour per pixel and 18-bit colour per pixel. The data format is described for each interface. Data can be downloaded to the Frame Memory by 2 methods.


Method 1:

The Image data is sent to the Frame Memory in successive Frame writes, each time the Frame Memory is filled, the Frame Memory pointer is reset to the start point and the next Frame is written.

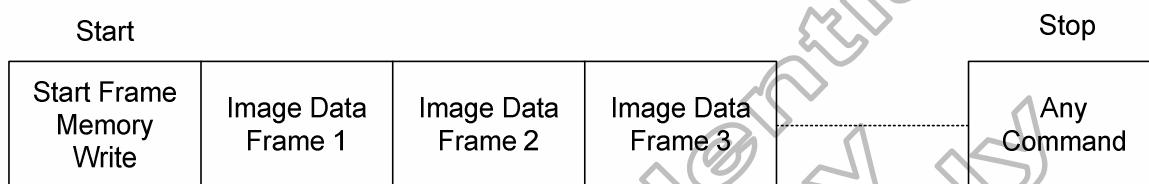

Method 2:

Image Data is sent and at the end of each Frame Memory download, a command is sent to stop Frame Memory Write. Then Start Memory Write command is sent, and a new Frame is downloaded.

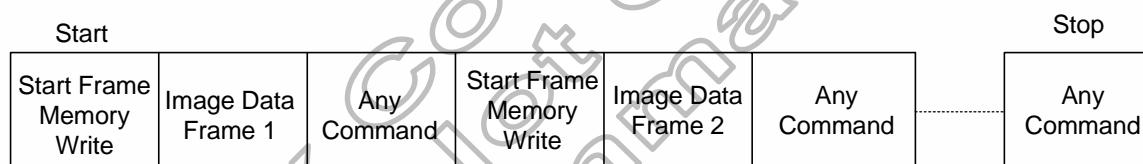

Note: (1) These apply to all Data Transfer Colour modes on both Serial and Parallel interfaces.
 (2) The Frame Memory can contain both odd and even number of pixels for both Methods. Only complete pixel data will be stored in the Frame Memory.

5.2 Address Counter (AC)

The HX8353-C contains an address counter (AC) which assigns address for writing/reading pixel data to/from GRAM. The address pointers set the position of GRAM whose addresses range X=0~131d (0~83h) and Y=0~161d (0~A1h).

Every time when a pixel data is written/read the GRAM, the X address or Y address of AC will be automatically increased by 1 (or decreased by 1), which is decided by the register (MV, MX and MY bit) setting.

To simplify the address control of GRAM access, the window address function allows for writing data only to a window area of GRAM specified by registers. After data being written to the GRAM, the AC will be increased or decreased within setting window address-range which is specified by the horizontal address register (start: SC, end: EC) or the vertical address register (start: SP, end: EP). Therefore, the data can be written consecutively without thinking a data wrap by those bit function.

5.2.1 MCU to memory write/read direction

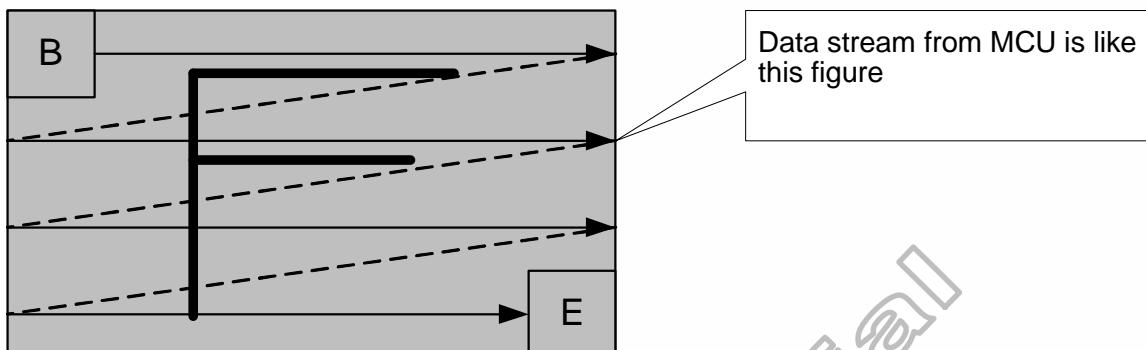


Figure 5. 32 MCU to memory write/read direction

The data is written in the order illustrated above. The Counter which dictates where in the physical memory the data is to be written is controlled by "Memory Data Access Control" Command, Bits MY, MX, MV as described below.

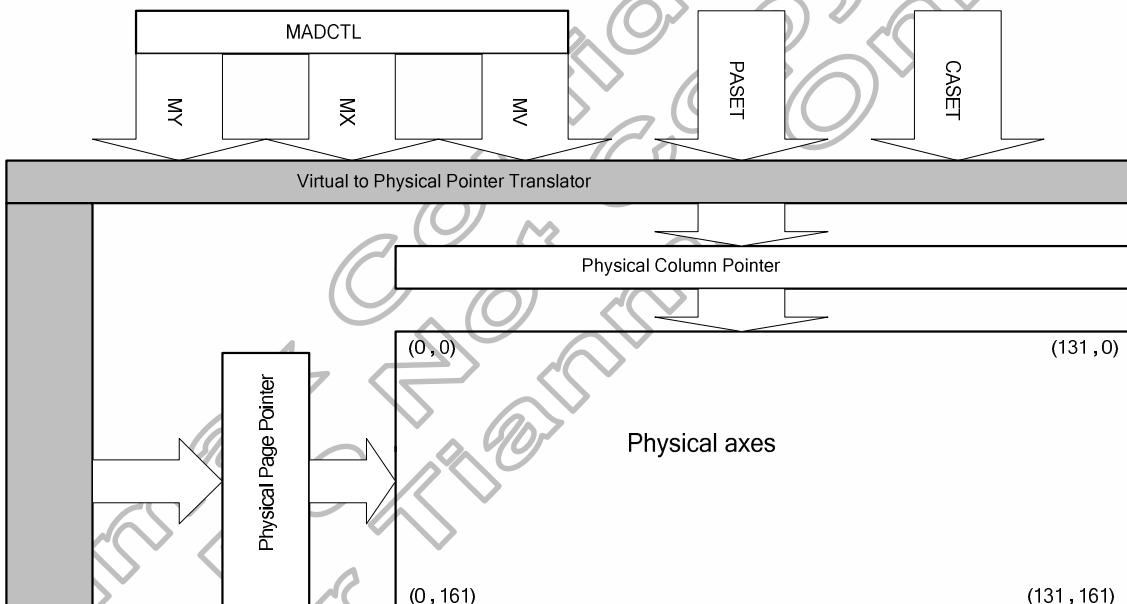


Figure 5. 33 MY, MX, MV Setting

MV	MX	MY	CASET	PASET
0	0	0	Direct to Physical Column Pointer	Direct to Physical Page Pointer
0	0	1	Direct to Physical Column Pointer	Direct to (161-Physical Page Pointer) Direct to (131-Physical Page Pointer)
0	1	0	Direct to (131-Physical Column Pointer)	Direct to Physical Page Pointer
0	1	1	Direct to (131-Physical Column Pointer)	Direct to (161-Physical Page Pointer) Direct to (131-Physical Page Pointer)
1	0	0	Direct to Physical Page Pointer	Direct to Physical Column Pointer
1	0	1	Direct to (161-Physical Page Pointer) Direct to (131-Physical Page Pointer)	Direct to Physical Column Pointer
1	1	0	Direct to Physical Page Pointer	Direct to (131-Physical Column Pointer)
1	1	1	Direct to (161-Physical Page Pointer) Direct to (131-Physical Page Pointer)	Direct to (131-Physical Column Pointer)

Table 5. 5 MY, MX, MV Setting

The following figure depicts the update method with MV, MX and MY bit


















Display Data Direction	MADCTR parameter			Image in the Host	Image in the Driver (GRAM)
	MV	MX	MY		
Normal	0	0	0		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
Y-Mirror	0	0	1		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Mirror	0	1	0		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Mirror Y-Mirror	0	1	1		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Y Exchange	1	0	0		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Y Exchange Y-Mirror	1	0	1		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Y Exchange X-Mirror	1	1	0		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET
X-Y Exchange X-Mirror Y-Mirror	1	1	1		 H/W Position (0,0) X,Y address (0,0) X: CASET Y: RASET

Figure 5. 34 Address Direction Settings

5.3 Source, Gate and Memory Map

5.3.1 When using 132 x 162 GRAM resolution, display resolution 132RGB x 162 and support S45AP spec (RSO[2:0]=3'b000 & STE_SEL=0)

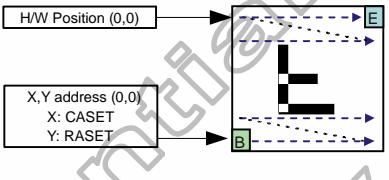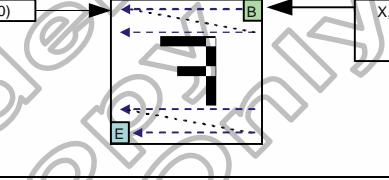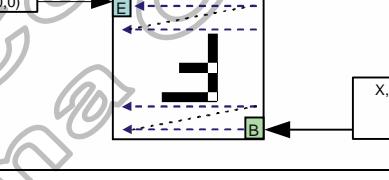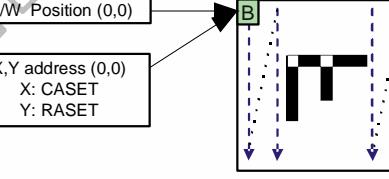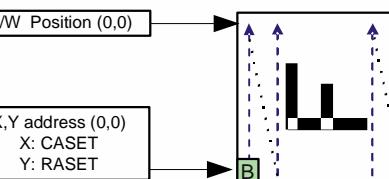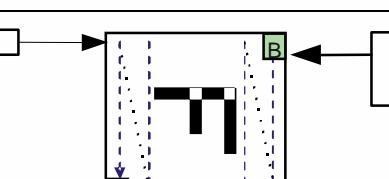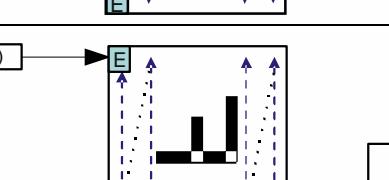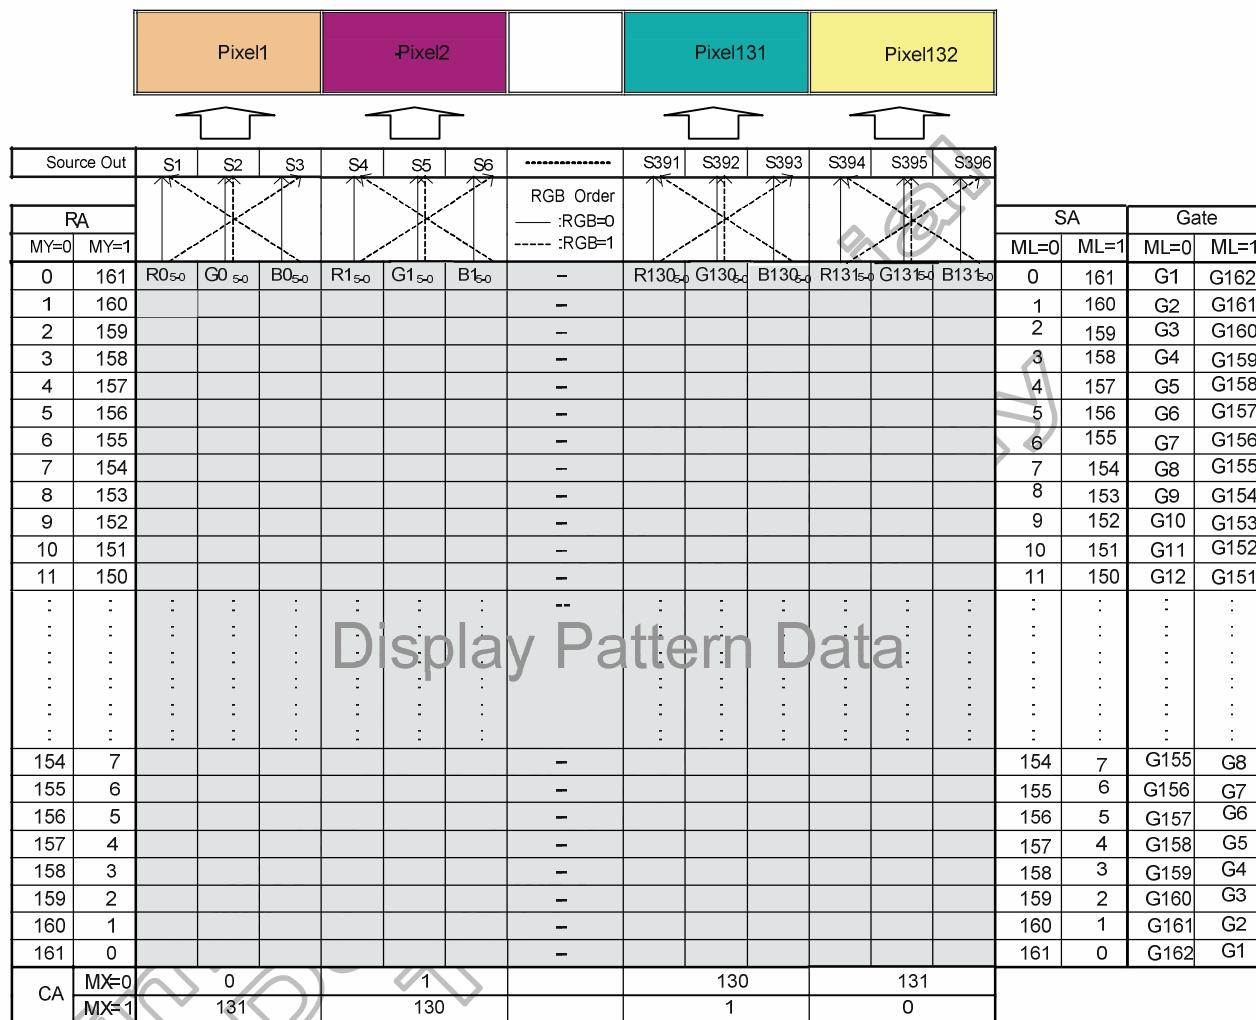

						Pixel1						Pixel2												Pixel131						Pixel132					
Source Out		S1	S2	S3	S4	S5	S6	RGB Order						S391	S392	S393	S394	S395	S396	SA		Gate													
RA	MY=0	MY=1																			ML=0		ML=1		ML=0		ML=1								
			R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀							R130 ₅₀	G130 ₅₀	B130 ₅₀	R131 ₅₀	G131 ₅₀	B131 ₅₀	0	161	G1	G162	1	160	G2	G161							
0	161																																		
1	160																																		
2	159																																		
3	158																																		
4	157																																		
5	156																																		
6	155																																		
7	154																																		
8	153																																		
9	152																																		
10	151																																		
11	150																																		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:					
154	7																																		
155	6																																		
156	5																																		
157	4																																		
158	3																																		
159	2																																		
160	1																																		
161	0																																		
CA	MX=0		0		1											130		131																	
	MX=1		131		130											1		0																	

Note: RA = Row Address,
 CA = Column Address,
 SA = Scan Address,
 MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command
 MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command
 ML = Scan direction parameter, D4 parameter of MADCTL command
 RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 35 Memory Map, 132 x 162 GRAM resolution, display resolution 132RGB x 162

5.3.2 When using 132 x 162 GRAM resolution, display resolution 128RGB x 160 and support S43AP spec (RSO[2:0]=3'b000 & STE_SEL=1)

						Pixel1	Pixel2		Pixel127	Pixel128					
Source Out		S7	S8	S9	S10	S11	S12	S385	S386	S387	S388	S389	S390	
RA								RGB Order							
MY=0								--- :RGB=0							
MY=1								---- :RGB=1							
0	161	R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀	—	R126 ₅₀	G126 ₅₀	B126 ₅₀	R127 ₅₀	G127 ₅₀	B127 ₅₀	
1	160							—							
2	159							—							
3	158							—							
4	157							—							
5	156							—							
6	155							—							
7	154							—							
8	153							—							
9	152							—							
10	151							—							
11	150							—							
...	—	
...	—	
...	—	
...	—	
154	7							—							
155	6							—							
156	5							—							
157	4							—							
158	3							—							
159	2							—							
160	1							—							
161	0							—							
CA		MX=0	0	1	126	126	127	127							
CA		MX=1	127	126	1	0									

Note: RA = Row Address,

CA = Column Address,

SA = Scan Address,

MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command

MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command

ML = Scan direction parameter, D4 parameter of MADCTL command

RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 36 Memory Map, 132 x 162 GRAM resolution ,display resolution 128RGB x 160

5.3.3 When using 128 x 160 GRAM resolution, display resolution 128RGB x 160 and support S44AP spec (RSO[2:0]=3'b011)

Pixel1 Pixel2 Pixel127 Pixel128														
Source Out	S7	S8	S9	S10	S11	S12	-----	S385	S386	S387	S388	S389	S390	
RA							RGB Order							
	MY=0	MY=1					— :RGB=0	— :RGB=1						
0	159	R0 _{5:0}	G0 _{5:0}	B0 _{5:0}	R1 _{5:0}	G1 _{5:0}	B1 _{5:0}	-	R126 _{5:0}	G126 _{5:0}	B126 _{5:0}	R127 _{5:0}	G127 _{5:0}	B127 _{5:0}
1	158							-						0 159 G2 G161
2	157							-						1 158 G3 G160
3	156							-						2 157 G4 G159
4	155							-						3 156 G5 G158
5	154							-						4 155 G6 G157
6	153							-						5 154 G7 G156
7	152							-						6 153 G8 G155
8	151							-						7 152 G9 G154
9	150							-						8 151 G10 G153
10	149							-						9 150 G11 G152
11	148							-						10 149 G12 G151
...	11 148 G13 G150
152	7							-						152 7 G154 G9
153	6							-						153 6 G155 G8
154	5							-						154 5 G156 G7
155	4							-						155 4 G157 G6
156	3							-						156 3 G158 G5
157	2							-						157 2 G159 G4
158	1							-						158 1 G160 G3
159	0							-						159 0 G161 G2
CA	MX=0	0	1					126	126	127				
	MX=1	127	126					1	1	0				

Note: RA = Row Address,

CA = Column Address,

SA = Scan Address,

MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command

MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command

ML = Scan direction parameter, D4 parameter of MADCTL command

RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 37 Memory Map, 128 x 160 GRAM resolution, display resolution 128RGB x 160

5.3.4 When using 120 x 160 GRAM resolution, display resolution 120RGB x 160 (RSO[2:0]=3'b010)

Pixel1 Pixel2 Pixel119 Pixel120														
Source Out	S7	S8	S9	S10	S11	S12	-----	S361	S362	S363	S364	S365	S366	
RA							RGB Order							
MY=0							— :RGB=0							
MY=1							--- :RGB=1							
0	159	R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀	-	R118 ₅₀	G118 ₅₀	B118 ₅₀	R119 ₅₀	G119 ₅₀	B119 ₅₀
1	158							-				-	-	-
2	157							-				-	-	-
3	156							-				-	-	-
4	155							-				-	-	-
5	154							-				-	-	-
6	153							-				-	-	-
7	152							-				-	-	-
8	151							-				-	-	-
9	150							-				-	-	-
10	149							-				-	-	-
11	148							-				-	-	-
...
152	7							-				-	-	-
153	6							-				-	-	-
154	5							-				-	-	-
155	4							-				-	-	-
156	3							-				-	-	-
157	2							-				-	-	-
158	1							-				-	-	-
159	0							-				-	-	-
CA	MX=0	0	1					118		119				
	MX=1	119	118					1		0				

Note: RA = Row Address,

CA = Column Address,

SA = Scan Address,

MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command

MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command

ML = Scan direction parameter, D4 parameter of MADCTL command

RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 38 Memory Map, 120 x 160 GRAM resolution, display resolution 120RGB x 160

5.3.5 When using 128 x 128 GRAM resolution, display resolution 128RGB x 128 (RSO[2:0]=3'b001)

Display Pattern Data													
													
Source Out	S7	S8	S9	S10	S11	S12	-----	S385	S386	S387	S388	S389	S390
RA							RGB Order						
							— :RGB=0						
							- - :RGB=1						
MY=0	R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀	-	R126 ₅₀	G126 ₅₀	B126 ₅₀	R127 ₅₀	G127 ₅₀	B127 ₅₀
MY=1							-						
0	127						-						0
1	126						-						1
2	125						-						2
3	124						-						3
4	123						-						4
5	122						-						5
6	121						-						6
7	120						-						7
8	119						-						8
9	118						-						9
10	117						-						10
11	116						-						11
...
120	7						-						120
121	6						-						121
122	5						-						122
123	4						-						123
124	3						-						124
125	2						-						125
126	1						-						126
127	0						-						127
CA	MX=0	0	1				126	127					
	MX=1	127	126				1	0					

Note: RA = Row Address,

CA = Column Address,

SA = Scan Address,

MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command

MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command

ML = Scan direction parameter, D4 parameter of MADCTL command

RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 39 Memory Map, 128 x 128 GRAM resolution, display resolution 128RGB x 128

5.3.6 When using 96 x 68 GRAM resolution, display resolution 96RGB x 68 (RSO[2:0]=3'b100)

Pixel1 Pixel2 Pixel95 Pixel 96											
   											
Source Out S55 S56 S57 S58 S59 S60 ----- S337 S338 S339 S340 S341 S342											
RA											
MY=0 MY=1											
0	67	R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀	-	R94 ₅₀	G94 ₅₀	B94 ₅₀
1	66							-	R95 ₅₀	G95 ₅₀	B95 ₅₀
2	65							-			
3	64							-			
4	63							-			
5	62							-			
6	61							-			
7	60							-			
8	59							-			
9	58							-			
10	57							-			
11	56							-			
...
...
...
...
...
60	7							-			
61	6							-			
62	5							-			
63	4							-			
64	3							-			
65	2							-			
66	1							-			
67	0							-			
CA	MX=0	0	1				94	95			
	MX=1	95	94				1	0			

Note: RA = Row Address,
CA = Column Address,
SA = Scan Address,
MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command
MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command
ML = Scan direction parameter, D4 parameter of MADCTL command
RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 40 Memory Map, 96 x 68 GRAM resolution, display resolution 96RGB x 68

5.3.7 When using 96 x 64 GRAM resolution, display resolution 96RGB x 64 (RSO[2:0]=3'b101)

Pixel1 Pixel2 Pixel95 Pixel 96													
													
Source Out	S55	S56	S57	S58	S59	S60	-----	S337	S338	S339	S340	S341	S342
RA							RGB Order						
	MY=0	MY=1					— :RGB=0						
	0	63	R0 ₅₀	G0 ₅₀	B0 ₅₀	R1 ₅₀	G1 ₅₀	B1 ₅₀	R94 ₅₀	G94 ₅₀	B94 ₅₀	R95 ₅₀	G95 ₅₀
	1	62											
	2	61											
	3	60											
	4	59											
	5	58											
	6	57											
	7	56											
	8	55											
	9	54											
	10	53											
	11	52											

	56	7											
	57	6											
	58	5											
	59	4											
	60	3											
	61	2											
	62	1											
	63	0											
CA	MX=0	0		1				94		95			
	MX=1	95		94				1		0			

Note: RA = Row Address,

CA = Column Address,

SA = Scan Address,

MX = Mirror X-axis (Column address direction parameter), D6 parameter of MADCTL command

MY = Mirror Y-axis (Row address direction parameter), D7 parameter of MADCTL command

ML = Scan direction parameter, D4 parameter of MADCTL command

RGB= Red, Green and Blue pixel position change, D3 parameter of MADCTL command

Figure 5. 41 Memory Map, 96 x 64 GRAM resolution, display resolution 96RGB x 64

5.3.8 Normal Display On or Partial Display On

The HX8353-C has an internal GRAM that store 48,114 bytes bit pattern data, where one pixel is expressed by 18 bits.

5.3.8.1 132X162 GRAM resolution (Size) (display resolution 132RGB x 162 and support S45AP spec (RSO[2:0]=3'b000 & STE_SEL=0)

(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 83h and page pointer is 00h to A1h is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	-----	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A180H	A181H	A182H	A183H

LCD panel S/G pins	S1	S2	S3	-----	S394	S395	S396
G1	0000H			-----	0083H		
G2	0100H			-----	0183H		
G3	0200H			-----	0283H		
G4	0300H			-----	0383H		
G5	0400H			-----	0483H		
G6	0500H			-----	0583H		

G157	9C00H			-----	9C83H		
G158	9D00H			-----	9D83H		
G159	9E00H			-----	9E83H		
G160	9F00H			-----	9F83H		
G161	A000H			-----	A083H		
G162	A100H			-----	A183H		

Table 5. 6

(b)Partial Display On

PSL[15:0]=02h, PEL[15:0]=9Fh, ML=0.

GRAM	00h	01h	02h	03h	-----	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A180H	A181H	A182H	A183H

LCD panel S/G pins	S1	S2	S3	-----	S394	S395	S396
non-display area 2 lines	G1	0000H	-----	-----	0083H	-----	-----
	G2	0100H	-----	-----	0183H	-----	-----
	G3	0200H	-----	-----	0283H	-----	-----
	G4	0300H	-----	-----	0383H	-----	-----
	G5	0400H	-----	-----	0483H	-----	-----
	G6	0500H	-----	-----	0583H	-----	-----
Display area 158 lines			-----	-----		-----	-----
	G157	9C00H	-----	-----	9C83H	-----	-----
	G158	9D00H	-----	-----	9D83H	-----	-----
	G159	9E00H	-----	-----	9E83H	-----	-----
	G160	9F00H	-----	-----	9F83H	-----	-----
	G161	A000H	-----	-----	A083H	-----	-----
Non-display area 2 lines	G162	A100H	-----	-----	A183H	-----	-----

Table 5. 7

5.3.8.2 132X162 GRAM resolution (Size) (display resolution 128RGB x 160 and support S43AP spec (RSO[2:0]=3'b000 & STE_SEL=1)
(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 83h and page pointer is 00h to A1h is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	-----	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A180H	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S389	S388	S387
G2	0000H			-----	0181H		
G3	0100H			-----	0281H		
G4	0200H			-----	0381H		
G5	0300H			-----	0481H		
G6	0400H			-----	0581H		
G7	0500H			-----	0681H		

G158	9C00H			-----	9D81H		
G159	9D00H			-----	9E81H		
G160	9E00H			-----	9F81H		
G161	9F00H			-----	A081H		

Table 5. 8

(b)Partial Display On

PSL[15:0]=03h, PEL[15:0]=9Eh, ML=0.

GRAM	00h	01h	02h	03h	-----	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A180H	A181H	A182H	A183H

LCD panel S/G pins	/S	8S	6S	-----	S88	S68	069/S
non-display area 2 lines	{	G2	0102H	-----	0181H		
Display area 156 lines	{	G3	0202H	-----	0281H		
Non-display area 2 lines	{	G4	0302H	-----	0381H		
		G5	0402H	-----	0481H		
		G6	0502H	-----	0581H		
		G7	0602H	-----	0681H		

		G158	9D02H	-----	9D81H		
		G159	9E02H	-----	9E81H		
		G160	9F02H	-----	9F81H		
		G161	A002H	-----	A081H		

Table 5. 9

5.3.8.3 128X160 GRAM resolution (Size) (display resolution 128RGB x 160 and support S44AP spec (RSO[2:0]=3'b011)
(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 7Fh and page pointer is 00h to 9Fh is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	-----	7Fh	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0				
00h	0000H	0001H	0002H	0003H	-----	007FH	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	017FH	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	027FH	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	037FH	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	047FH	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	057FH	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C7FH	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D7FH	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E7FH	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F7FH	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A07FH	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A17FH	A180H	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S389	S388	S380
G2	0000H			-----	007FH		
G3	0100H			-----	017FH		
G4	0200H			-----	027FH		
G5	0300H			-----	037FH		
G6	0400H			-----	047FH		
G7	0500H			-----	057FH		

G158	9C00H			-----	9C7FH		
G159	9D00H			-----	9D7FH		
G160	9E00H			-----	9E7FH		
G161	9F00H			-----	9F7FH		

Table 5. 10

(b)Partial Display On

PSL[15:0]=02h, PEL[15:0]=9Dh, ML=0.

GRAM	00h	01h	02h	03h	-----	7Fh	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0				
00h	0000H	0001H	0002H	0003H	-----	007FH	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	017FH	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	027FH	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	037FH	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	047FH	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	057FH	0580H	0581H	0582H	0583H

9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C7FH	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D7FH	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E7FH	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F7FH	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A07FH	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A17FH	A180H	A181H	A182H	A183H

LCD panel S/G pins	S ₇	S ₈	S ₉	-----	S ₃₈₈	S ₃₈₉	S ₃₉₀
G2	0000H	-----	-----	-----	007FH	-----	-----
G3	0100H	-----	-----	-----	017FH	-----	-----
G4	0200H	-----	-----	-----	027FH	-----	-----
G5	0300H	-----	-----	-----	037FH	-----	-----
G6	0400H	-----	-----	-----	047FH	-----	-----
G7	0500H	-----	-----	-----	057FH	-----	-----

G158	9C00H	-----	-----	-----	9C7FH	-----	-----
G159	9D00H	-----	-----	-----	9D7FH	-----	-----
G160	9E00H	-----	-----	-----	9E7FH	-----	-----
G161	9F00H	-----	-----	-----	9F7FH	-----	-----

Table 5. 11

5.3.8.4 120X160 GRAM resolution (Size) (display resolution 120RGB x 160 → RSO[2:0]=3'b001)
(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 77h and page pointer is 00h to 9Fh is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	-----	77h	-----	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0077H	-----	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0177H	-----	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0277H	-----	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0377H	-----	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0477H	-----	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0577H	-----	0581H	0582H	0583H
9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C77H	-----	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D77H	-----	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E77H	-----	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F77H	-----	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A077H	-----	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A177H	-----	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S36	S36 _r	S93
G2	0000H			-----	0077H		
G3	0100H			-----	0177H		
G4	0200H			-----	0277H		
G5	0300H			-----	0377H		
G6	0400H			-----	0477H		
G7	0500H			-----	0577H		
G158	9C00H			-----	9C77H		
G159	9D00H			-----	9D77H		
G160	9E00H			-----	9E77H		
G161	9F00H			-----	9F77H		

Table 5. 12

(b)Partial Display On

PSL[15:0]=02h, PEL[15:0]=9Dh, ML=0.

GRAM	00h	01h	02h	03h	-----	77h	-----	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	0077H	-----	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	0177H	-----	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	0277H	-----	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	0377H	-----	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	0477H	-----	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	0577H	-----	0581H	0582H	0583H
					-----		-----			
9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C77H	-----	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D77H	-----	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E77H	-----	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F77H	-----	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A077H	-----	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A177H	-----	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S364	S365	S366
non-display area 2 lines	G2	0000H	-----	0077H			
	G3	0100H	-----	0177H			
	G4	0200H	-----	0277H			
	G5	0300H	-----	0377H			
	G6	0400H	-----	0477H			
	G7	0500H	-----	0577H			
Display area 156 lines	G158	9C00H	-----	9C77H			
	G159	9D00H	-----	9D77H			
	G160	9E00H	-----	9E77H			
	G161	9F00H	-----	9F77H			

Table 5. 13

5.3.7.5 128X128 GRAM resolution (Size) (display resolution 128RGB x 128 → RSO[2:0]=3'b010)
(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 7Fh and page pointer is 00h to 7Fh is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	-----	7Fh	-----	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	007FH	-----	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	017FH	-----	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	027FH	-----	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	037FH	-----	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	047FH	-----	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	057FH	-----	0581H	0582H	0583H
7Eh	7E00H	7E01H	7E02H	7E03H	-----	7E7FH	-----	7E81H	7E82H	7E83H
7Fh	7F00H	7F01H	7F02H	7F03H	-----	7E7FH	-----	7F81H	7F82H	7F83H
9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C7FH	-----	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D7FH	-----	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E7FH	-----	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F7FH	-----	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A07FH	-----	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A17FH	-----	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S38	S389	S390
G2	0000H			-----	007FH		
G3	0100H			-----	017FH		
G4	0200H			-----	027FH		
G5	0300H			-----	037FH		
G6	0400H			-----	047FH		
G7	0500H			-----	057FH		

G126	9C00H			-----	9C7FH		
G127	9D00H			-----	9D7FH		
G128	9E00H			-----	9E7FH		
G129	9F00H			-----	9F7FH		

Table 5. 14

(b)Partial Display On

PSL[15:0]=02h, PEL[15:0]=7Dh, ML=0.

GRAM	00h	01h	02h	03h	-----	7Fh	-----	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	-----	DB---DB 17 ---0	-----	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	-----	007FH	-----	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	-----	017FH	-----	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	-----	027FH	-----	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	-----	037FH	-----	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	-----	047FH	-----	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	-----	057FH	-----	0581H	0582H	0583H
					-----		-----			
7Eh	7E00H	7E01H	7E02H	7E03H	-----	7E7FH	-----	7E81H	7E82H	7E83H
7Fh	7F00H	7F01H	7F02H	7F03H	-----	7E7FH	-----	7F81H	7F82H	7F83H
					-----		-----			
9Ch	9C00H	9C01H	9C02H	9C03H	-----	9C7FH	-----	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	-----	9D7FH	-----	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	-----	9E7FH	-----	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	-----	9F7FH	-----	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	-----	A07FH	-----	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	-----	A17FH	-----	A181H	A182H	A183H

LCD panel S/G pins	S7	S8	S9	-----	S387	S389	S390
G2	0000H			-----	007FH		
G3	0100H			-----	017FH		
G4	0200H			-----	027FH		
G5	0300H			-----	037FH		
G6	0400H			-----	047FH		
G7	0500H			-----	057FH		

G158	7C00H			-----	7C7FH		
G159	7D00H			-----	7D7FH		
G160	7E00H			-----	7E7FH		
G161	7F00H			-----	7F7FH		

Table 5. 15

5.3.8.6 96x68 resolution (RSO[2:0]=3'b100)

(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 5Fh and page pointer is 00h to 43h is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	--	5Dh	5Eh	5Fh	--	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	--	005DH	005EH	005FH	--	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	--	015DH	015EH	015FH	--	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	--	025DH	025EH	025FH	--	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	--	035DH	035EH	035FH	--	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	--	045DH	045EH	045FH	--	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	--	055DH	055EH	055FH	--	0580H	0581H	0582H	0583H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
41h	4100H	4101H	4102H	4103H	--	415DH	415EH	415FH	--	4180H	4181H	4182H	4183H
42h	4200H	4201H	4102H	4103H	--	425DH	425EH	425FH	--	4280H	4281H	4282H	4283H
43h	4300H	4301H	4302H	4303H	--	435DH	435EH	435FH	--	4380H	4381H	4382H	4383H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
9Ch	9C00H	9C01H	9C02H	9C03H	--	9C5DH	9C5EH	9C5FH	--	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	--	9D5DH	9D5EH	9D5FH	--	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	--	9E5DH	9E5EH	9E5FH	--	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	--	9F5DH	9F5EH	9F5FH	--	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	--	A05DH	A05EH	A05FH	--	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	--	A15DH	A15EH	A15FH	--	A180H	A181H	A182H	A183H

LCD panel S/G pins	S55	S56	S57		S340	S341	S342
G1	0000H	-----			005FH		
G2	0100H	-----			015FH		
G3	0200H	-----			025FH		
G4	0300H	-----			035FH		
G5	0400H	-----			045FH		
G6	0500H	-----			055FH		
---	---	---	---		---	---	---
G67	4200H	-----			425FH		
G68	4300H	-----			435FH		

Table 5. 16

(b)Partial Display On

PSL[15:0]=02, PEL[15:0]=41, ML=0.

GRAM	00h	01h	02h	03h	--	5Dh	5Eh	5Fh	--	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	--	005DH	005EH	005FH	--	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	--	015DH	015EH	015FH	--	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	--	025DH	025EH	025FH	--	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	--	035DH	035EH	035FH	--	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	--	045DH	045EH	045FH	--	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	--	055DH	055EH	055FH	--	0580H	0581H	0582H	0583H
					--				--				
41h	4100H	4101H	4102H	4103H	--	415DH	415EH	415FH	--	4180H	4181H	4182H	4183H
42h	4200H	4201H	4202H	4203H	--	425DH	425EH	425FH	--	4280H	4281H	4282H	4283H
43h	4300H	4301H	4302H	4303H	--	435DH	435EH	435FH	--	4380H	4381H	4382H	4383H
					--				--				
9Ch	9C00H	9C01H	9C02H	9C03H	--	9C5DH	9C5EH	9C5FH	--	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	--	9D5DH	9D5EH	9D5FH	--	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	--	9E5DH	9E5EH	9E5FH	--	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	--	9F5DH	9F5EH	9F5FH	--	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	--	A05DH	A05EH	A05FH	--	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	--	A15DH	A15EH	A15FH	--	A180H	A181H	A182H	A183H

LCD panel S/G pins		S55	S56	S57	S340	S341	S342
G1	0000H	-----			005FH		
G2	0100H	-----			015FH		
G3	0200H	-----			025FH		
G4	0300H	-----			035FH		
G5	0400H	-----			045FH		
G6	0500H	-----			055FH		
G66	4100H	-----			415FH		
G67	4200H	-----			425FH		
G68	4300H	-----			435FH		

Non-display area 2 lines {

Display area 64 lines {

Non-display area 2 lines {

Table 5. 17

5.3.8.7 96x64 resolution (RSO[2:0]=3'b101)

(a)Normal Display On

In this mode, contents of the frame memory within an area where column pointer is 00h to 5Fh and page pointer is 00h to 43h is displayed. To display a dot on leftmost top corner, store the dot data at (column pointer, row pointer) = (0, 0).

GRAM	00h	01h	02h	03h	--	5Dh	5Eh	5Fh	--	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	--	005DH	005EH	005FH	--	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	--	015DH	015EH	015FH	--	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	--	025DH	025EH	025FH	--	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	--	035DH	035EH	035FH	--	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	--	045DH	045EH	045FH	--	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	--	055DH	055EH	055FH	--	0580H	0581H	0582H	0583H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
3Fh	3F00H	3F01H	3F02H	3F03H	--	3F5DH	3F5EH	3F5FH	--	3F80H	3F81H	3F82H	3F83H
40h	4000H	4001H	4002H	4003H	--	405DH	405EH	405FH	--	4080H	4081H	4082H	4083H
41h	4100H	4101H	4102H	4103H	--	415DH	415EH	415FH	--	4180H	4181H	4182H	4183H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
9Ch	9C00H	9C01H	9C02H	9C03H	--	9C5DH	9C5EH	9C5FH	--	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	--	9D5DH	9D5EH	9D5FH	--	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	--	9E5DH	9E5EH	9E5FH	--	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	--	9F5DH	9F5EH	9F5FH	--	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	--	A05DH	A05EH	A05FH	--	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	--	A15DH	A15EH	A15FH	--	A180H	A181H	A182H	A183H

LCD panel S/G pins	S55	S56	S57		S340	S341	S342
G1	0000H	-----			005FH		
G2	0100H	-----			015FH		
G3	0200H	-----			025FH		
G4	0300H	-----			035FH		
G5	0400H	-----			045FH		
G6	0500H	-----			055FH		
---	---	---	---		---	---	---
G63	3E00H	-----			3E5FH		
G64	3F00H	-----			3F5FH		

Table 5. 18

(b)Partial Display On

PSL[15:0]=02, PEL[15:0]=3D, ML=0.

GRAM	00h	01h	02h	03h	--	5Dh	5Eh	5Fh	--	80h	81h	82h	83h
	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	--	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0	DB---DB 17 ---0
00h	0000H	0001H	0002H	0003H	--	005DH	005EH	005FH	--	0080H	0081H	0082H	0083H
01h	0100H	0101H	0102H	0103H	--	015DH	015EH	015FH	--	0180H	0181H	0182H	0183H
02h	0200H	0201H	0202H	0203H	--	025DH	025EH	025FH	--	0280H	0281H	0282H	0283H
03h	0300H	0301H	0302H	0303H	--	035DH	035EH	035FH	--	0380H	0381H	0382H	0383H
04h	0400H	0401H	0402H	0403H	--	045DH	045EH	045FH	--	0480H	0481H	0482H	0483H
05h	0500H	0501H	0502H	0503H	--	055DH	055EH	055FH	--	0580H	0581H	0582H	0583H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
3Fh	3F00H	3F01H	3F02H	3F03H	--	3F5DH	3F5EH	3F5FH	--	3F80H	3F81H	3F82H	3F83H
40h	4000H	4001H	4002H	4003H	--	405DH	405EH	405FH	--	4080H	4081H	4082H	4083H
41h	4100H	4101H	4102H	4103H	--	415DH	415EH	415FH	--	4180H	4181H	4182H	4183H
---	---	---	---	---	--	---	---	---	--	---	---	---	---
9Ch	9C00H	9C01H	9C02H	9C03H	--	9C5DH	9C5EH	9C5FH	--	9C80H	9C81H	9C82H	9C83H
9Dh	9D00H	9D01H	9D02H	9D03H	--	9D5DH	9D5EH	9D5FH	--	9D80H	9D81H	9D82H	9D83H
9Eh	9E00H	9E01H	9E02H	9E03H	--	9E5DH	9E5EH	9E5FH	--	9E80H	9E81H	9E82H	9E83H
9Fh	9F00H	9F01H	9F02H	9F03H	--	9F5DH	9F5EH	9F5FH	--	9F80H	9F81H	9F82H	9F83H
A0h	A000H	A001H	A002H	A003H	--	A05DH	A05EH	A05FH	--	A080H	A081H	A082H	A083H
A1h	A100H	A101H	A102H	A103H	--	A15DH	A15EH	A15FH	--	A180H	A181H	A182H	A183H

LCD panel S/G pins		S55	S56	S57		S340	S341	S342	
Non-display area 2 lines	G1	0000H	-----			005FH			
	G2	0100H	-----			015FH			
	G3	0200H	-----			025FH			
	G4	0300H	-----			035FH			
	G5	0400H	-----			045FH			
	G6	0500H	-----			055FH			
Display area 60 lines	---	---	---	---		---	---	---	
	G63	3E00H	-----			3E5FH			
Non-display area 2 lines	G64	3F00H	-----			3F5FH			

Table 5. 19

5.4 Vertical Scrolling Display

The vertical scrolling display is specified by SCRLAR instruction (R33h) and VSCSAD instruction (R37h). The Vertical scrolling is only enable when using 132 x 162 GRAM resolution, display resolution 132RGB x 162 and support S45AP spec (RSO[2:0]=3'b000 & STE_SEL=0)

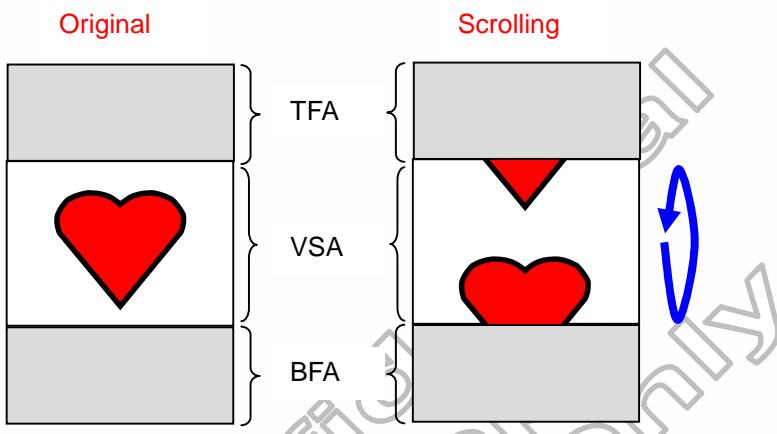


Figure 5. 42

RSO[2:0]=3'b000 (132RGBx162)

When RSO[2:0]=3'b000(132RGB x 162) and Vertical Scrolling Definition Parameters (TFA+VSA+BFA)=162 (other setting is prohibited). In this case, scrolling is applied as shown below.

Example 1: RSO=2'b00(132RGB x 162), TFA =3, VSA=157, BFA=2, VSP=4, MADCTR(ML)=0: Scrolling

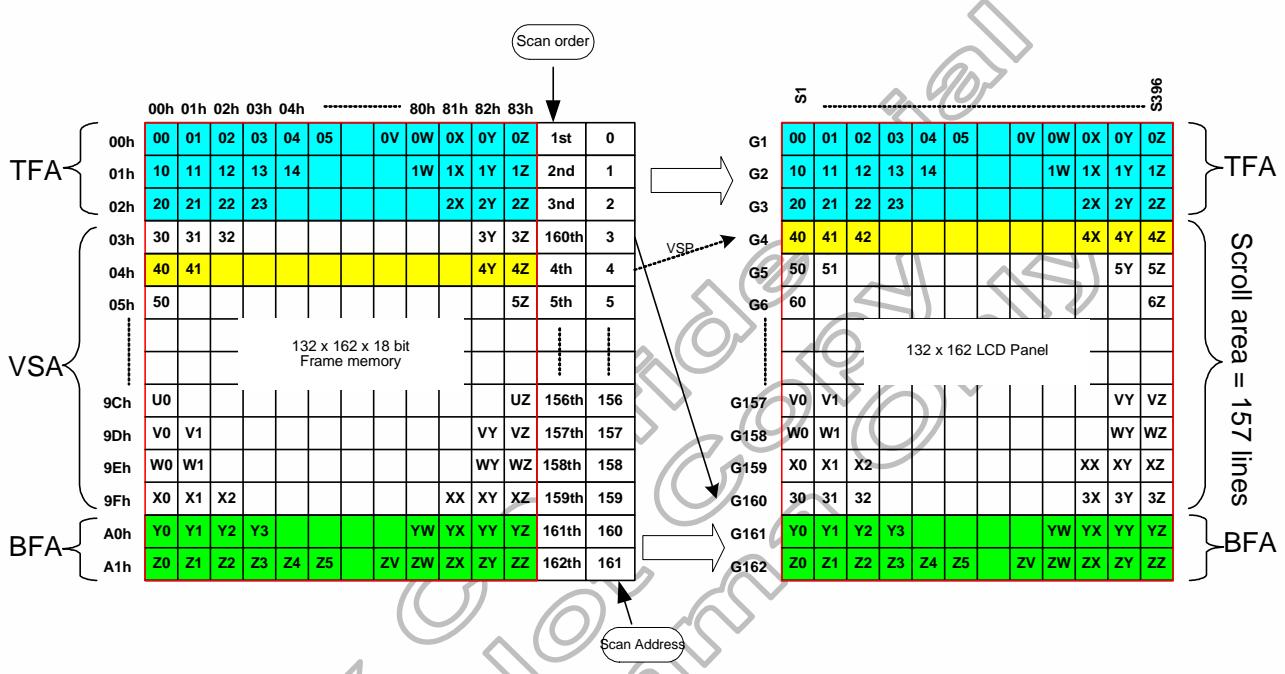


Figure 5. 43

Example 2: RSO=2'b00(132RGB x 162), TFA =3, VSA=157, BFA=2, SSA=4, MADCTR (ML)=1: Scrolling (TFA and BFA are exchanged)

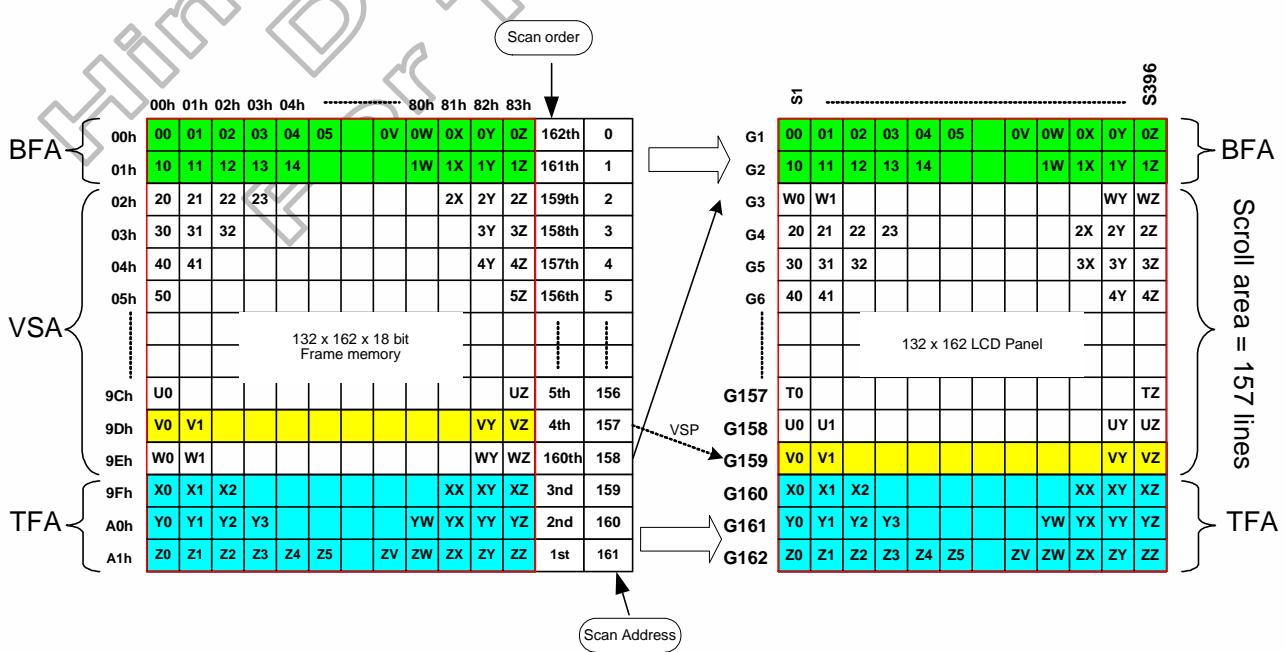


Figure 5. 44

5.5 Tearing Effect Output Line

The Tearing Effect output line supplies to the MPU a Panel synchronization signal. This signal can be enabled or disabled by the Tearing Effect Line Off & On commands. The mode of the Tearing Effect signal is defined by the parameter of the Tearing Effect Line On command. The signal can be used by the MPU to synchronize Frame Memory Writing when displaying video images.

5.5.1 Tearing Effect Line Modes

Mode 1, the Tearing Effect Output signal consists of V-Blanking Information only:

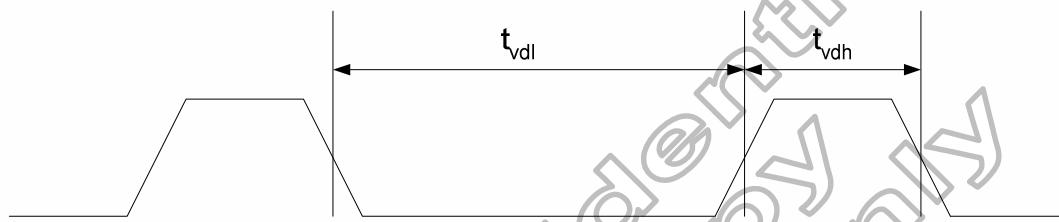



Figure 5.45

t_{VREG1} = The LCD display is not updated from the Frame Memory


t_{vdl} = The LCD display is updated from the Frame Memory (except Invisible Line – see below)

Mode 2, The Tearing Effect Output signal consists of V-Blanking and H-Blanking Information, there is one V-sync and N H-sync pulses per field on different resolution.


128RGBx160 (Support S43AP and S44AP): N=160

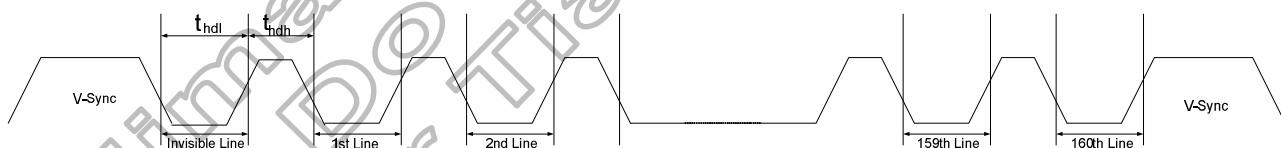



132RGBx162 (Support S45AP): N=162

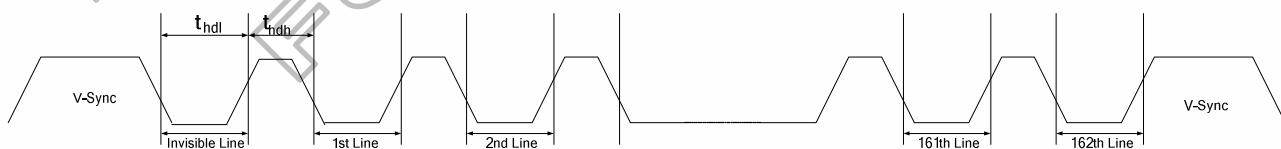

96x68: N=68

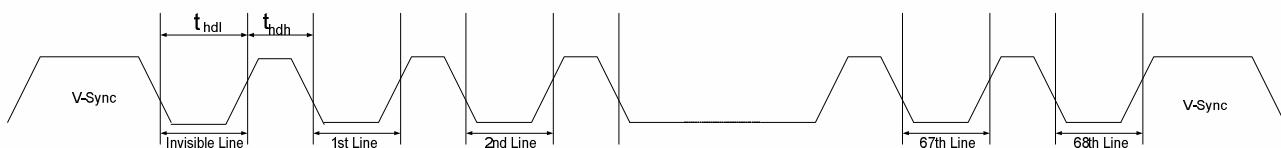

96x64: N=64

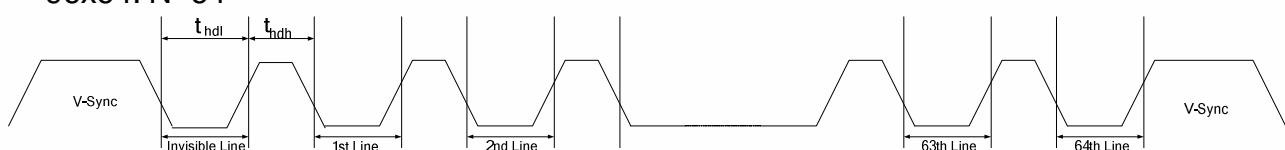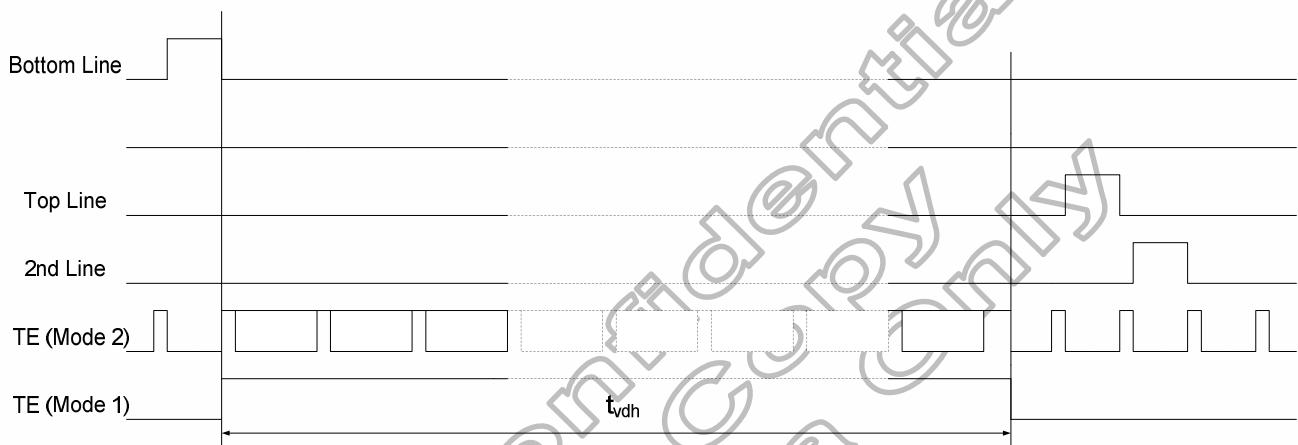**Figure 5. 46** t_{hdh} = The LCD display is not updated from the Frame Memory t_{hdl} = The LCD display is updated from the Frame Memory (except Invisible Line – see above.)**Note:** During Sleep In Mode, the Tearing Output Pin is active Low**Figure 5. 47**

5.5.2 Tearing Effect Line Timing

The Tearing Effect signal is described below.

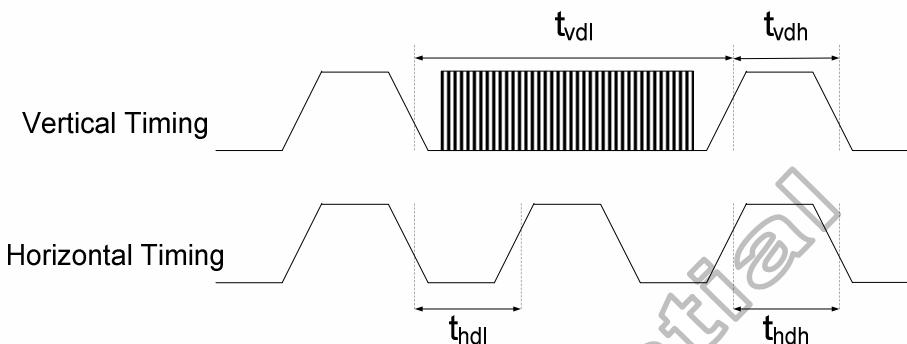


Figure 5. 48

Idle Mode Off (Frame Rate = TBDHz)

Symbol	Parameter	Min.	Max.	Unit	Description
tvdl	Vertical Timing Low Duration	TBD	-	ms	-
tVREG1	Vertical Timing High Duration	1000	-	us	-
thdl	Horizontal Timing Low Duration	TBD	-	us	-
thdh	Horizontal Timing High Duration	TBD	500	us	-

Note: The timings in Table 5.12 apply when MADCTL ML=0 and ML=1

Table 5. 20 AC characteristics of Tearing Effect Signal

The signal's rise and fall times (tf, tr) are stipulated to be equal to or less than 15ns.

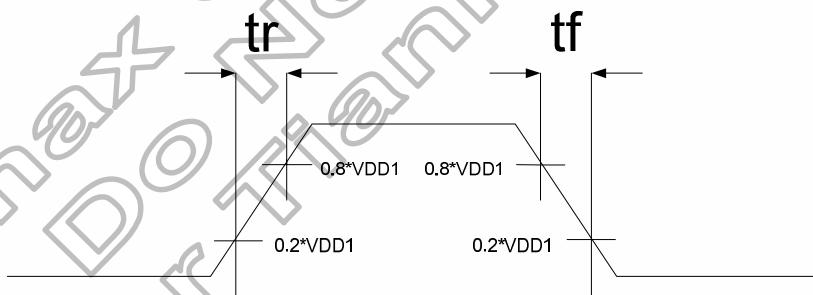


Figure 5. 49

The Tearing Effect Output Line is fed back to the MPU and should be used as shown below to avoid Tearing Effect:

5.5.3 Example 1: MPU Write is faster than Panel Read

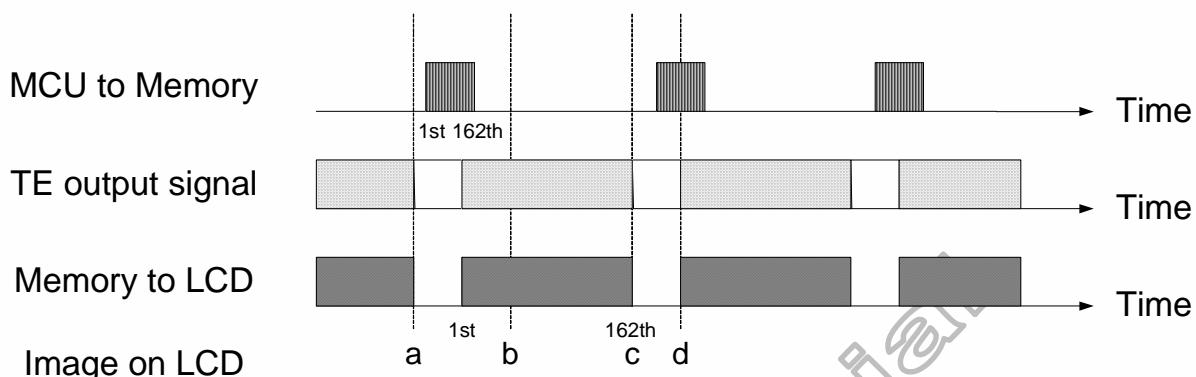


Figure 5. 50

Data write to Frame Memory is now synchronized to the Panel Scan. It should be written during the vertical sync pulse of the Tearing Effect Output Line. This ensures that data is always written ahead of the panel scan and each Panel Frame refresh has a complete new image:



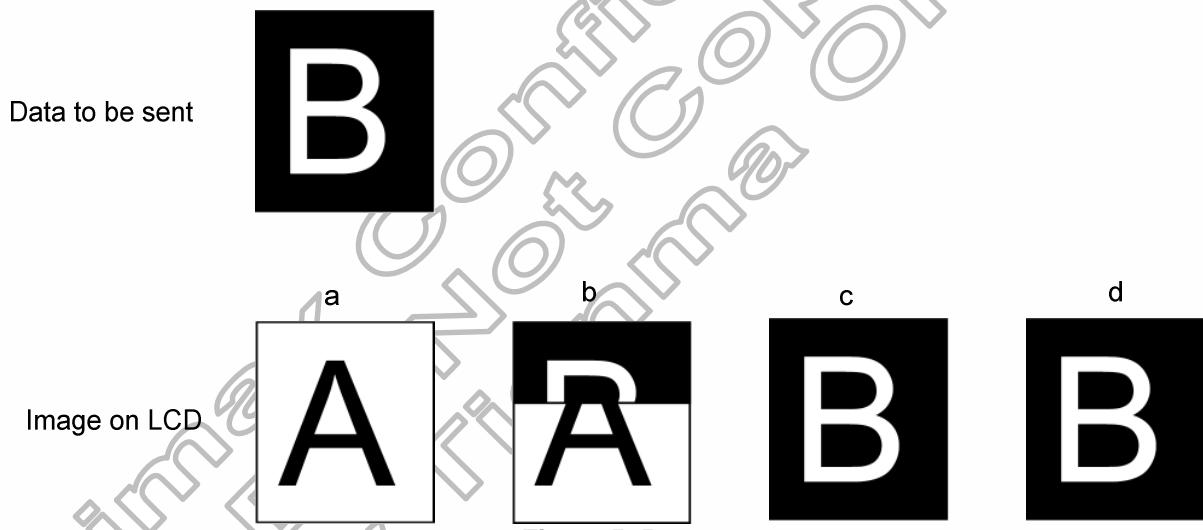


Figure 5. 51

5.5.4 Example 2: MPU Write is slower than Panel Read**Figure 5. 52**

The MPU to Frame Memory write begins just after Panel Read has commenced i.e. after one horizontal sync pulse of the Tearing Effect Output Line. This allows time for the image to download behind the Panel Read pointer and finishing download during the subsequent Frame before the Read Pointer “catches” the MPU to Frame memory write position.

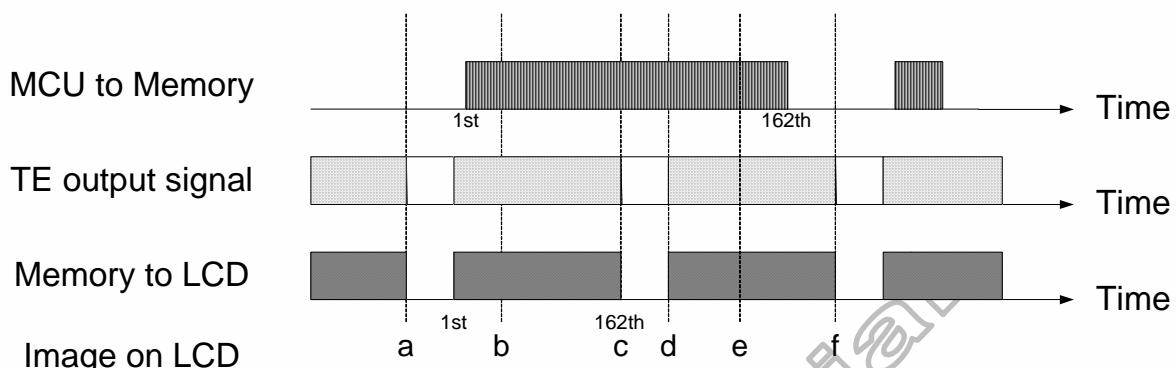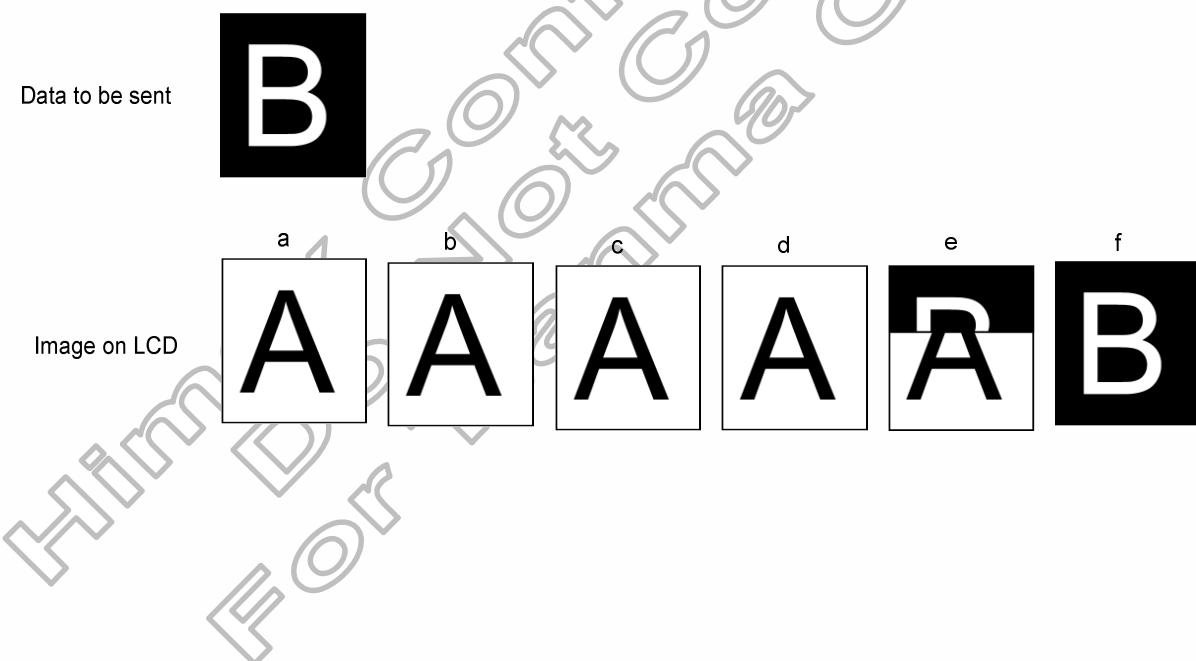

5.6 Color Depth Conversion Look-up Tables

R input (4bit) 12 bit/pixel -mode 4,096 colours	R input (5 bit) 16 bit/pixel -mode 65,536 colours	R output (6bit) 18 bit/pixel -mode 262,144 colours	RGBSET Parameter
0000	00000	R005R004 R003 R002 R001 R000	1
0001	00001	R015R014 R013 R012 R011 R010	2
0010	00010	R025R024 R023 R022 R021 R020	3
0011	00011	R035R034 R033 R032 R031 R030	4
0100	00100	R045R044 R043 R042 R041 R040	5
0101	00101	R055R054 R053 R052 R051 R050	6
0110	00110	R065R064 R063 R062 R061 R060	7
0111	00111	R075R074 R073 R072 R071 R070	8
1000	01000	R085R084 R083 R082 R081 R080	9
1001	01001	R095R094 R093 R092 R091 R090	10
1010	01010	R105R104 R103 R102 R101 R100	11
1011	01011	R115R114 R113 R112 R111 R110	12
1100	01100	R125R124 R123 R122 R121 R120	13
1101	01101	R135R134 R133 R132 R131 R130	14
1110	01110	R145R144 R143 R142 R141 R140	15
1111	01111	R155R154 R153 R152 R151 R150	16
No Input	10000	R165R164 R163 R162 R161 R160	17
No Input	10001	R175R174 R173 R172 R171 R170	18
No Input	10010	R185R184 R183 R182 R181 R180	19
No Input	10011	R195R194 R193 R192 R191 R190	20
No Input	10100	R205R204 R203 R202 R201 R200	21
No Input	10101	R215R214 R213 R212 R211 R210	22
No Input	10110	R225R224 R223 R222 R221 R220	23
No Input	10111	R235R234 R233 R232 R231 R230	24
No Input	11000	R245R244 R243 R242 R241 R240	25
No Input	11001	R255R254 R253 R252 R251 R250	26
No Input	11010	R265R264 R263 R262 R261 R260	27
No Input	11011	R275R274 R273 R272 R271 R270	28
No Input	11100	R285R284 R283 R282 R281 R280	29
No Input	11101	R295R294 R293 R292 R291 R290	30
No Input	11110	R305R304 R303 R302 R301 R300	31
No Input	11111	R315R314 R313 R312 R311 R310	32

G input (4bit) 12 bit/pixel -mode 4,096 colours	G input (6 bit) 16 bit/pixel -mode 65,536 colours	G output (6bit) 18 bit/pixel -mode 262,144 colours	RGBSET Parameter
0000	000000	G005G004 G003 G002 G001 G000	33
0001	000001	G015G014 G013 G012 G011 G010	34
0010	000010	G025G024 G023 G022 G021 G020	35
0011	000011	G035G034 G033 G032 G031 G030	36
0100	000100	G045G044 G043 G042 G041 G040	37
0101	000101	G055G054 G053 G052 G051 G050	38
0110	000110	G065G064 G063 G062 G061 G060	39
0111	000111	G075G074 G073 G072 G071 G070	40
1000	001000	G085G084 G083 G082 G081 G080	41
1001	001001	G095G094 G093 G092 G091 G090	42
1010	001010	G105G104 G103 G102 G101 G100	43
1011	001011	G115G114 G113 G112 G111 G110	44
1100	001100	G125G124 G123 G122 G121 G120	45
1101	001101	G135G134 G133 G132 G131 G130	46
1110	001110	G145G144 G143 G142 G141 G140	47
1111	001111	G155G154 G153 G152 G151 G150	48
No Input	010000	G165G164 G163 G162 G161 G160	49
No Input	010001	G175G174 G173 G172 G171 G170	50
No Input	010010	G185G184 G183 G182 G181 G180	51
No Input	010011	G195G194 G193 G192 G191 G190	52
No Input	010100	G205G204 G203 G202 G201 G200	53
No Input	010101	G215G214 G213 G212 G211 G210	54
No Input	010110	G225G224 G223 G222 G221 G220	55
No Input	010111	G235G234 G233 G232 G231 G230	56
No Input	011000	G245G244 G243 G242 G241 G240	57
No Input	011001	G255G254 G253 G252 G251 G250	58
No Input	011010	G265G264 G263 G262 G261 G260	59
No Input	011011	G275G274 G273 G272 G271 G270	60
No Input	011100	G285G284 G283 G282 G281 G280	61
No Input	011101	G295G294 G293 G292 G291 G290	62
No Input	011110	G305G304 G303 G302 G301 G300	63
No Input	011111	G315G314 G313 G312 G311 G310	64

G input (4bit) 12 bit/pixel -mode 4,096 colours	G input (6 bit) 16 bit/pixel -mode 65,536 colours	G output (6bit) 18 bit/pixel -mode 262,144 colours	RGBSET Parameter
No Input	100000	G325 G324 G323 G322 G321 G320	65
No Input	100001	G335 G334 G333 G332 G331 G330	66
No Input	100010	G345 G344 G343 G342 G341 G340	67
No Input	100011	G355 G354 G353 G352 G351 G350	68
No Input	100100	G365 G364 G363 G362 G361 G360	69
No Input	100101	G375 G374 G373 G372 G371 G370	70
No Input	100110	G385 G384 G383 G382 G381 G380	71
No Input	100111	G395 G394 G393 G392 G391 G390	72
No Input	101000	G405 G404 G403 G402 G401 G400	73
No Input	101001	G415 G414 G413 G412 G411 G410	74
No Input	101010	G425 G424 G423 G422 G421 G420	75
No Input	101011	G435 G434 G433 G432 G431 G430	76
No Input	101100	G445 G444 G443 G442 G441 G440	77
No Input	101101	G455 G454 G453 G452 G451 G450	78
No Input	101110	G465 G464 G463 G462 G461 G460	79
No Input	101111	G475 G474 G473 G472 G471 G470	80
No Input	110000	G485 G484 G483 G482 G481 G480	81
No Input	110001	G495 G494 G493 G492 G491 G490	82
No Input	110010	G505 G504 G503 G502 G501 G500	83
No Input	110011	G515 G514 G513 G512 G511 G510	84
No Input	110100	G525 G524 G523 G522 G521 G520	85
No Input	110101	G535 G534 G533 G532 G531 G530	86
No Input	110110	G545 G544 G543 G542 G541 G540	87
No Input	110111	G555 G554 G553 G552 G551 G550	88
No Input	111000	G565 G564 G563 G562 G561 G560	89
No Input	111001	G575 G574 G573 G572 G571 G570	90
No Input	111010	G585 G584 G583 G582 G581 G580	91
No Input	111011	G595 G594 G593 G592 G591 G590	92
No Input	111100	G605 G604 G603 G602 G601 G600	93
No Input	111101	G615 G614 G613 G612 G611 G610	94
No Input	111110	G625 G624 G623 G622 G621 G620	95
No Input	111111	G635 G634 G533 G632 G631 G630	96

B input (4bit) 12 bit/pixel -mode 4,096 colours	B input (5 bit) 16 bit/pixel -mode 65,536 colours	B output (6bit) 18 bit/pixel -mode 262,144 colours	RGBSET Parameter
0000	00000	B005B004 B003 B002 B001 B000	97
0001	00001	B015B014 B013 B012 B011 B010	98
0010	00010	B025B024 B023 B022 B021 B020	99
0011	00011	B035B034 B033 B032 B031 B030	100
0100	00100	B045B044 B043 B042 B041 B040	101
0101	00101	B055B054 B053 B052 B051 B050	102
0110	00110	B065B064 B063 B062 B061 B060	103
0111	00111	B075B074 B073 B072 B071 B070	104
1000	01000	B085B084 B083 B082 B081 B080	105
1001	01001	B095B094 B093 B092 B091 B090	106
1010	01010	B105B104 B103 B102 B101 B100	107
1011	01011	B115B114 B113 B112 B111 B110	108
1100	01100	B125B124 B123 B122 B121 B120	109
1101	01101	B135B134 B133 B132 B131 B130	110
1110	01110	B145B144 B143 B142 B141 B140	111
1111	01111	B155B154 B153 B152 B151 B150	112
No Input	10000	B165B164 B163 B162 B161 B160	113
No Input	10001	B175B174 B173 B172 B171 B170	114
No Input	10010	B185B184 B183 B182 B181 B180	115
No Input	10011	B195B194 B193 B192 B191 B190	116
No Input	10100	B205B204 B203 B202 B201 B200	117
No Input	10101	B215B214 B213 B212 B211 B210	118
No Input	10110	B225B224 B223 B222 B221 B220	119
No Input	10111	B235B234 B233 B232 B231 B230	120
No Input	11000	B245B244 B243 B242 B241 B240	121
No Input	11001	B255B254 B253 B252 B251 B250	122
No Input	11010	B265B264 B263 B262 B261 B260	123
No Input	11011	B275B274 B273 B272 B271 B270	124
No Input	11100	B285B284 B283 B282 B281 B280	125
No Input	11101	B295B294 B293 B292 B291 B290	126
No Input	11110	B305B304 B303 B302 B301 B300	127
No Input	11111	B315B314 B313 B312 B311 B310	128

5.7 Oscillator

The HX8353-C has an internal oscillator without extra external components that provide a source for system clock generator.

5.8 Source Driver

The HX8353-C contains a 396 channels of source driver (S1~S396) which is used for driving the source line of TFT LCD panel. The source driver converts the digital data from GRAM into the analog voltage for 396 channels and generates corresponding gray scale voltage output, which can realize a 262,144 colors display simultaneously. Since the output circuit of this source driver incorporates an operational amplifier, a positive and a negative voltage can be alternately output from each channel.

5.9 Gate Driver

The HX8353-C contains a 160 gate channels of gate driver (G1~G160) which is used for driving the gate. The gate driver level is VGH when scan some line, VGL the other lines.

Himax Confidential
For DO Not Copy Only

5.10 LCD POWER GENERATION CIRCUIT

5.10.1 LCD Power Generation Scheme

The boost voltage generated is shown as below.

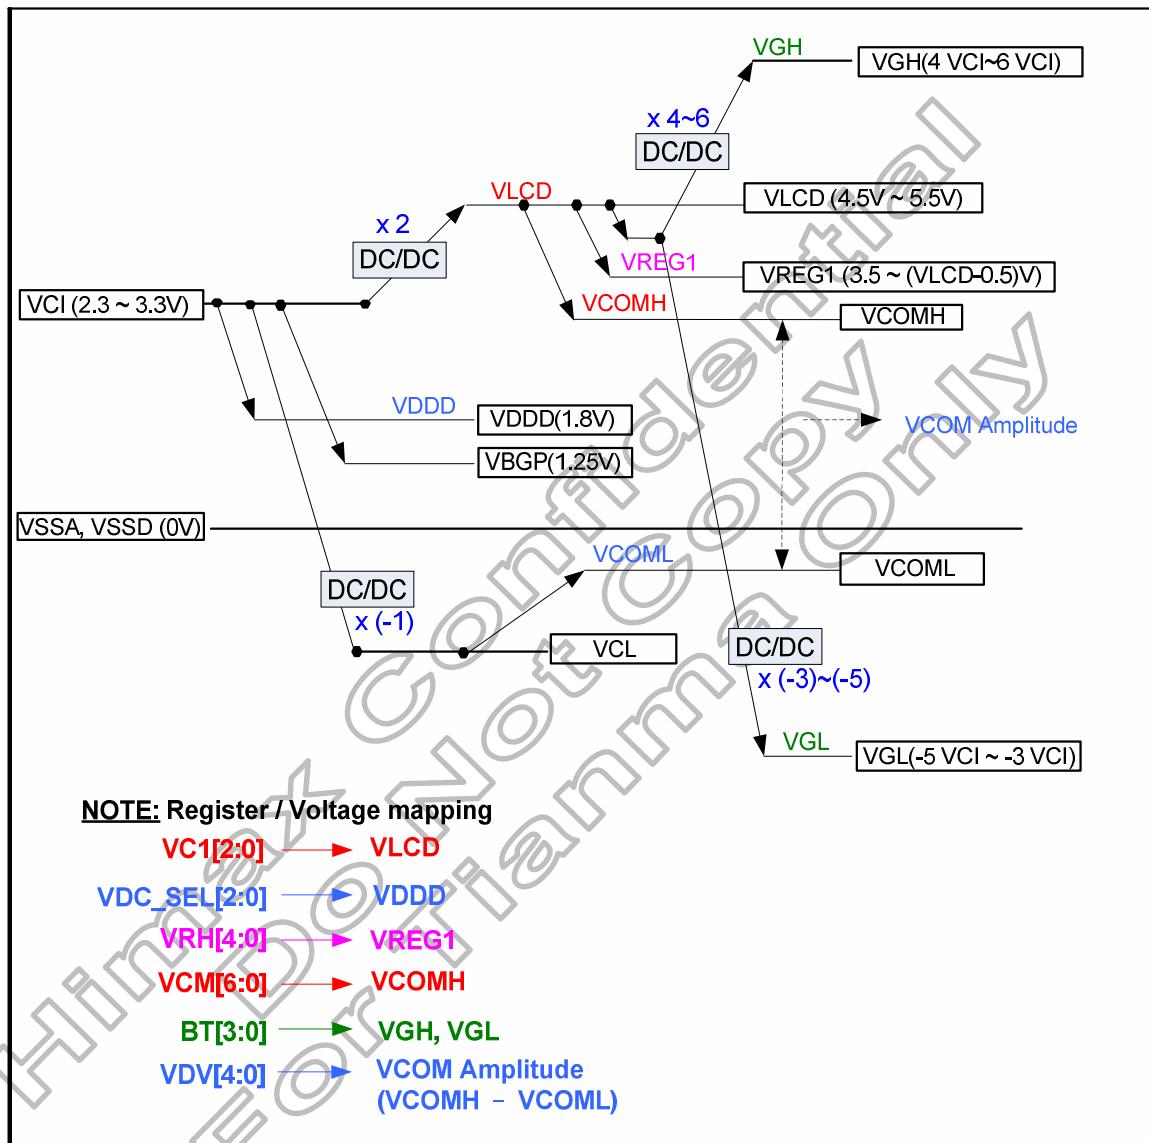


Figure 5. 53 LCD power generation scheme

5.10.2 Various Boosting Steps

The boost steps of each boosting voltage are selected according to how the external capacitors are connected. Different booster applications are shown as below.

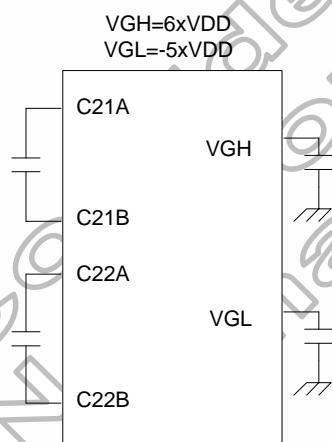



Figure 5. 54 Block Diagram of Power Supply Circuit

5.11 Gray Voltage Generator for Source Driver

The HX8353-C incorporates gamma adjustment function for the 262,144-color display (64 grayscale for each R, G, B color). Gamma adjustment operation is implemented by deciding the 8 grayscale levels firstly in gamma adjustment control registers to match the LCD panel. These registers are available for both polarities.

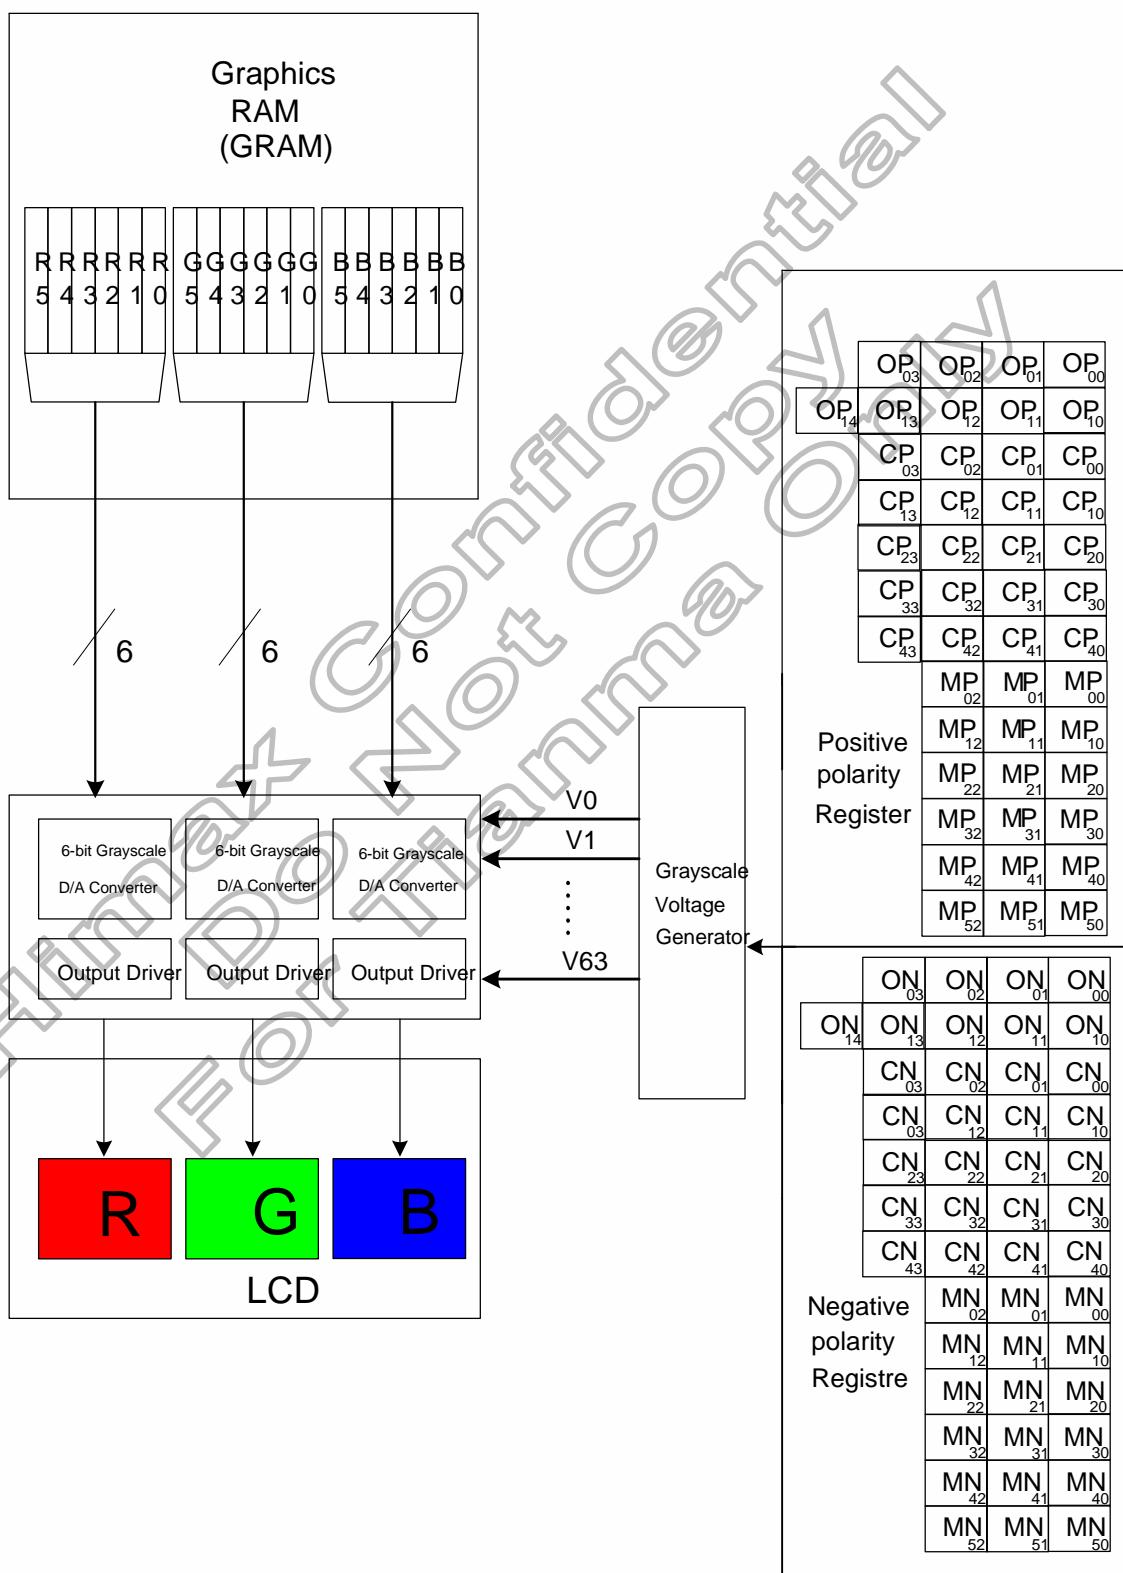


Figure 5. 55 Grayscale Control

5.11.1 Structure of Grayscale Voltage Generator

Eight reference gamma voltages $V_{GP/N}(0, 1, 8, 20, 43, 55, 62, 63)$ for positive and negative polarity are specified by the center adjustment, the micro adjustment and the offset adjustment registers firstly. With those eight voltage injected into specified node of grayscale voltage generator, totally 64 grayscale voltages (V_0-V_{63}) can be generated from grayscale amplifier for LCD panel.

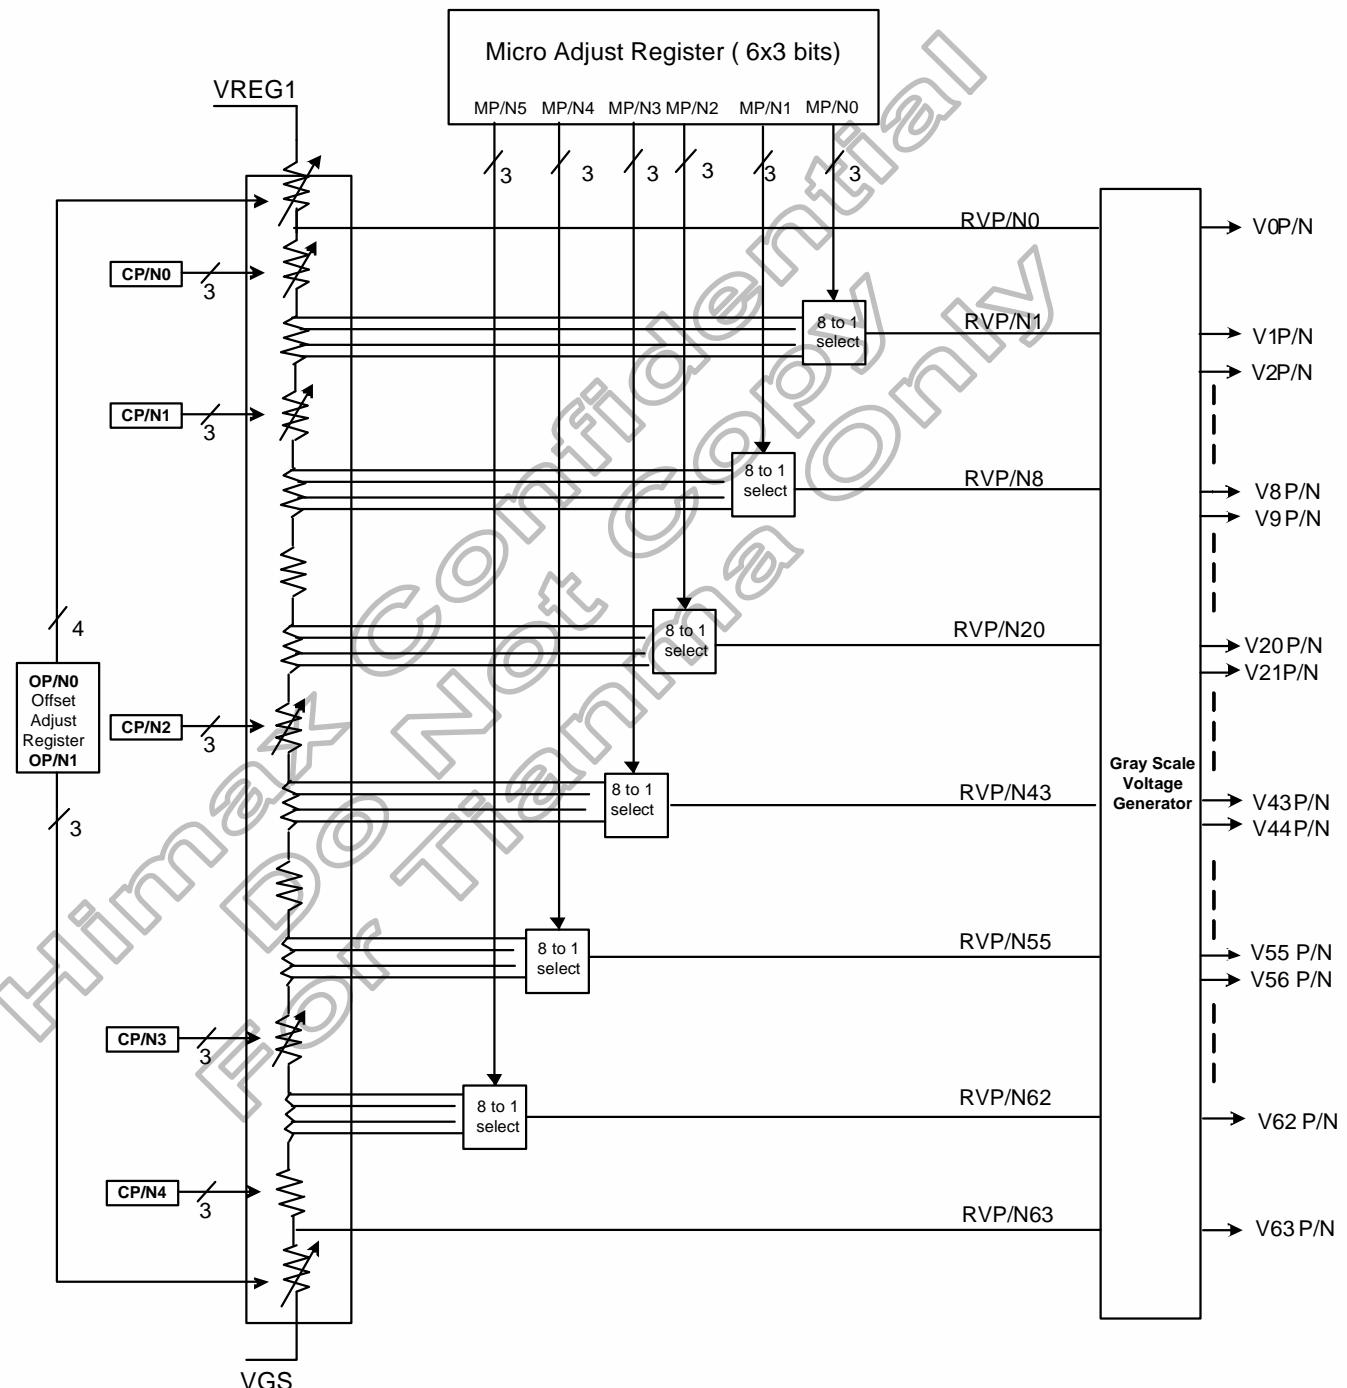


Figure 5. 56 Structure of Grayscale Voltage Generator

5.11.2 Gamma-Characteristics Adjustment Register

This HX8353-C has register groups for specifying a series grayscale voltage that meets the Gamma-characteristics for the LCD panel. These registers are divided into two groups, which correspond to the gradient, amplitude, and macro adjustment of the voltage for the grayscale characteristics. The polarity of each register can be specified independently. (R, G, and B are common.)

5.11.2.1 Offset Adjustment Registers 0/1

The offset adjustment variable registers are used to adjust the amplitude of the grayscale voltage. This function is implemented by controlling these variable resistors in the top and bottom of the gamma resistor stream for reference gamma voltage generation. These registers are available for both positive and negative polarities

5.11.2.2 Gamma Center Adjustment Registers

The gamma center adjustment registers are used to adjust the reference gamma voltage in the middle level of grayscale without changing the dynamic range. This function is implemented by choosing one input of 8 to 1 selector in the gamma resistor stream for reference gamma voltage generation. These registers are available for both positive and negative polarities.

5.11.3 Gamma Macro Adjustment Registers

The gamma macro adjustment registers can be used for fine adjustment of the reference gamma voltage. This function is implemented by controlling the 8-to-1 selectors (MP/N0~5), each of which has 8 inputs and generate one reference voltage output (RVP/N 0, 1, 8, 20, 44, 56, 63, 64). These registers are available for both positive and negative polarities.

Register Groups	Positive Polarity	Description
Center Adjustment	CP/N0 3-0	Variable resistor (VRTP/N) for center adjustment
	CP/N1 3-0	Variable resistor (VRCP/N0)for center adjustment
	CP/N2 3-0	Variable resistor (VRMP/N) for center adjustment
	CP/N3 3-0	Variable resistor (VRCP/N1)for center adjustment
	CP/N4 3-0	Variable resistor (VRBP/N)for center adjustment
Macro Adjustment	MP/N0 2-0	8-to-1 selector (reference voltage level of grayscale 1)
	MP/N1 2-0	8-to-1 selector (reference voltage level of grayscale 8)
	MP/N2 2-0	8-to-1 selector (reference voltage level of grayscale 20)
	MP/N3 2-0	8-to-1 selector (reference voltage level of grayscale 43)
	MP/N4 2-0	8-to-1 selector (reference voltage level of grayscale 55)
	MP/N5 2-0	8-to-1 selector (reference voltage level of grayscale 62)
Offset Adjustment	OP/N0 3-0	Variable resistor (VRP/N0)for offset adjustment
	OP/N1 4-0	Variable resistor (VRP/N1)for offset adjustment

Table 5. 21 Gamma-Adjustment Registers

5.11.4 Gamma Resister Stream and 8 to 1 Selector

The block consists of two gamma resister streams, one is for positive polarity and the other is for negative polarity, each one includes eight gamma reference voltages ($V_{g(P/N)0}$, 1, 8, 20, 43, 55, 62, 63). Furthermore, the block has a pin (VGS) to connect a variable resistor outside the chip for the variation between panels, if needed.

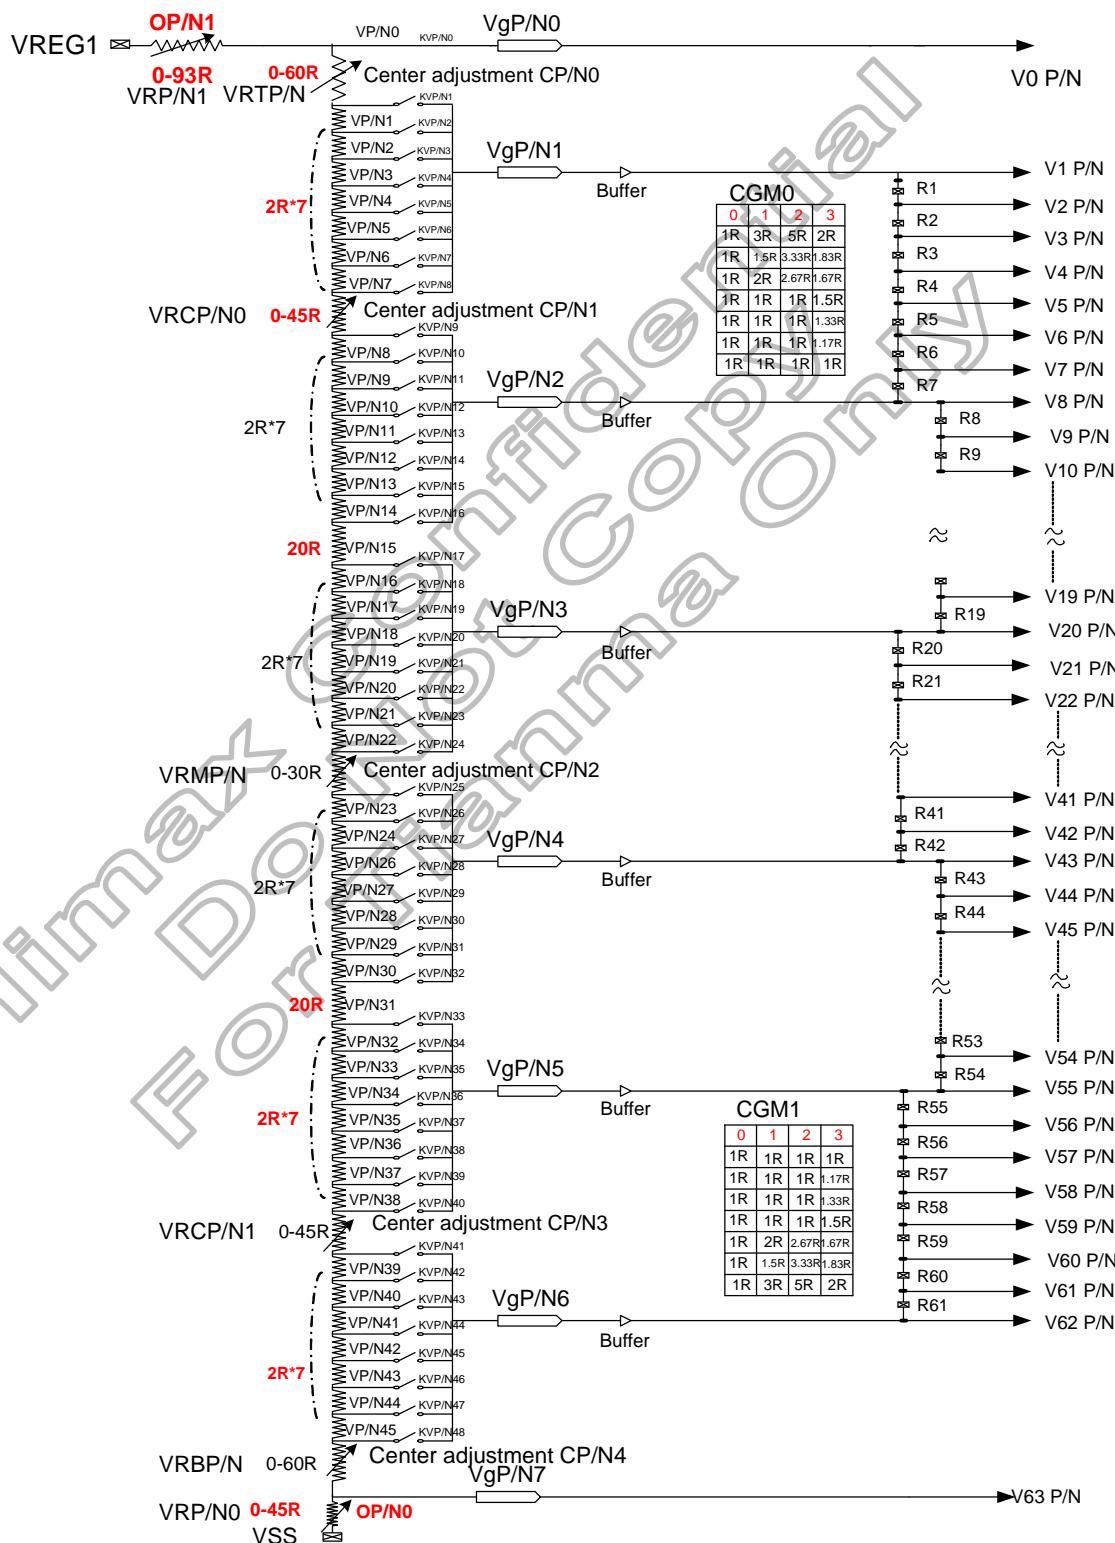


Figure 5. 57 Gamma Resister Stream and Gamma Reference Voltage

5.11.5 Variable Resistor

There are two types of variable resistors, one is for center adjustment and the other is for offset adjustment. The resistances are decided by setting values in the center adjustment, offset adjustment registers. Their relationship is shown as below.

Value in Register OP/N0 3-0	Resistance VRP/N0
0000	0R
0001	3R
0010	6R
•	•
1101	39R
1110	42R
1111	45R

Table 5. 22 Offset Adjustment 0

Value in Register OP/N1 4-0	Resistance VRP/N1
00000	0R
00001	3R
00010	6R
•	•
11101	87R
11110	90R
11111	93R

Table 5. 23 Offset Adjustment 1

Value in Register CP/N0 3-0	Resistance VRTP/N	Value in Register CP/N4 3-0	Resistance VRBP/N	Value in Register CP/N2 3-0	Resistance VRMP/N0
0000	0R	0000	0R	0000	0R
0001	4R	0001	4R	0001	2R
0010	8R	0010	8R	0010	4R
•	•	•	•	•	•
1100	•	1100	48R	1100	24R
1101	52R	1101	52R	1101	26R
1110	56R	1110	56R	1110	28R
1111	60R	1111	60R	1111	30R

Value in Register CP/N3 3-0	Resistance VRCP/N1
0000	0R
0001	3R
0010	6R
•	•
1100	36R
1101	39R
1110	42R
1111	45R

Value in Register CP/N1 3-0	Resistance VRCP/N0
0000	0R
0001	3R
0010	6R
•	•
1100	36R
1101	39R
1110	42R
1111	45R

Table 5. 24 Center Adjustment

8 to 1 Selector

The 8 to 1 selector has eight input voltages generated by gamma resister stream, and outputs one reference voltages selected from inputs for gamma reference voltage generation by setting value in macro adjustment register. There are six 8 to 1 selectors and the relationship is shown as below.

Value in Register	Voltage level					
	Vg(P/N) 1	Vg(P/N) 2	Vg(P/N) 3	Vg(P/N) 4	Vg(P/N) 5	Vg(P/N) 6
000	VP(N)1	VP(N)9	VP(N)17	VP(N)25	VP(N)33	VP(N)41
001	VP(N)2	VP(N)10	VP(N)18	VP(N)26	VP(N)34	VP(N)42
010	VP(N)3	VP(N)11	VP(N)19	VP(N)27	VP(N)35	VP(N)43
011	VP(N)4	VP(N)12	VP(N)20	VP(N)28	VP(N)36	VP(N)44
100	VP(N)5	VP(N)13	VP(N)21	VP(N)29	VP(N)37	VP(N)45
101	VP(N)6	VP(N)14	VP(N)22	VP(N)30	VP(N)38	VP(N)46
110	VP(N)7	VP(N)15	VP(N)23	VP(N)31	VP(N)39	VP(N)47
111	VP(N)8	VP(N)16	VP(N)24	VP(N)32	VP(N)40	VP(N)48

Table 5. 25 Output Voltage of 8 to 1 Selector

The grayscale levels are determined by the following formulas.

Reference Voltage		Formula	Pin
VgP/N0	----	VREG1-VD*VRP/N0 /sumRP/N	KVP0/KVN49
VgP1/VgN7	MP/N0 2-0=000	VREG1-VD((VRP/N0+VRCP/N) /sumRP/N	KVP1/KVN48
	MP/N0 2-0=001	VREG1-VD((VRP/N0+ VRTP/N +2R) /sumRP/N	KVP2/ KVN47
	MP/N0 2-0=010	VREG1-VD((VRP/N0+ VRTP/N +4R) /sumRP/N	KVP3/ KVN46
	MP/N0 2-0=011	VREG1-VD((VRP/N0+ VRTP/N +6R) /sumRP/N	KVP4/ KVN45
	MP/N0 2-0=100	VREG1-VD((VRP/N0+ VRTP/N +8R) /sumRP/N	KVP5/ KVN44
	MP/N0 2-0=101	VREG1-VD((VRP/N0+ VRTP/N +10R) /sumRP/N	KVP6/ KVN43
	MP/N0 2-0=110	VREG1-VD((VRP/N0+ VRTP/N +12R) /sumRP/N	KVP7/ KVN42
	MP/N0 2-0=111	VREG1-VD((VRP/N0+ VRTP/N +14R) /sumRP/N	KVP8/ KVN41
VgP2/VgN2	MP/N1 2-0=000	VREG1-VD((VRP/N0+ VRTP/N +14R+VRCP/N0) /sumRP/N	KVP9/ KVN40
	MP/N1 2-0=001	VREG1-VD((VRP/N0+ VRTP/N +16R+VRCP/N0) /sumRP/N	KVP10/ KVN39
	MP/N1 2-0=010	VREG1-VD((VRP/N0+ VRTP/N +18R+VRCP/N0) /sumRP/N	KVP11/ KVN38
	MP/N1 2-0=011	VREG1-VD((VRP/N0+ VRTP/N +20R+VRCP/N0) /sumRP/N	KVP12/ KVN37
	MP/N1 2-0=100	VREG1-VD((VRP/N0+ VRTP/N +22R+VRCP/N0) /sumRP/N	KVP13/ KVN36
	MP/N1 2-0=101	VREG1-VD((VRP/N0+ VRTP/N +24R+VRCP/N0) /sumRP/N	KVP14/ KVN35
	MP/N1 2-0=110	VREG1-VD((VRP/N0+ VRTP/N +26R+VRCP/N0) /sumRP/N	KVP15/ KVN34
	MP/N1 2-0=111	VREG1-VD((VRP/N0+ VRTP/N +28R+VRCP/N0) /sumRP/N	KVP16/ KVN33
VgP3/VgN3	MP/N2 2-0=000	VREG1-VD((VRP/N0+ VRTP/N+48R+VRCP/N0) /sumRP/N	KVP17/ KVN32
	MP/N2 2-0=001	VREG1-VD((VRP/N0+ VRTP/N+50R+VRCP/N0) /sumRP/N	KVP18/ KVN31
	MP/N2 2-0=010	VREG1-VD((VRP/N0+ VRTP/N+52R+VRCP/N0) /sumRP/N	KVP19/ KVN30
	MP/N2 2-0=011	VREG1-VD((VRP/N0+ VRTP/N+54R+VRCP/N0) /sumRP/N	KVP20/ KVN29
	MP/N2 2-0=100	VREG1-VD((VRP/N0+ VRTP/N+56R+VRCP/N0) /sumRP/N	KVP21/ KVN28
	MP/N2 2-0=101	VREG1-VD((VRP/N0+ VRTP/N+58R+VRCP/N0) /sumRP/N	KVP22/ KVN27
	MP/N2 2-0=110	VREG1-VD((VRP/N0+ VRTP/N+60R+VRCP/N0) /sumRP/N	KVP23/ KVN26
	MP/N2 2-0=111	VREG1-VD((VRP/N0+ VRTP/N+62R+VRCP/N0) /sumRP/N	KVP24/ KVN25
VgP4/VgN4	MP/N3 2-0=000	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +62R+VRCP/N0) /sumRP/N	KVP25/ KVN24
	MP/N3 2-0=001	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +64R+VRCP/N0) /sumRP/N	KVP26/ KVN23
	MP/N3 2-0=010	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +66R+VRCP/N0) /sumRP/N	KVP27/ KVN22
	MP/N3 2-0=011	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +68R+VRCP/N0) /sumRP/N	KVP28/ KVN21
	MP/N3 2-0=100	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +70R+VRCP/N0) /sumRP/N	KVP29/ KVN20
	MP/N3 2-0=101	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +72R+VRCP/N0) /sumRP/N	KVP30/ KVN19
	MP/N3 2-0=110	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +74R+VRCP/N0) /sumRP/N	KVP31/ KVN18
	MP/N3 2-0=111	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +76R+VRCP/N0) /sumRP/N	KVP32/ KVN17
VgP5/VgN5	MP/N4 2-0=000	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +96R+VRCP/N0) /sumRP/N	KVP33/ KVN16
	MP/N4 2-0=001	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +98R+VRCP/N0) /sumRP/N	KVP34/ KVN15
	MP/N4 2-0=010	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +100R+VRCP/N0) /sumRP/N	KVP35/ KVN14
	MP/N4 2-0=011	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +102R+VRCP/N0) /sumRP/N	KVP36/ KVN13
	MP/N4 2-0=100	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +104R+VRCP/N0) /sumRP/N	KVP37/ KVN12
	MP/N4 2-0=101	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +106R+VRCP/N0) /sumRP/N	KVP38/ KVN11
	MP/N4 2-0=110	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +108R+VRCP/N0) /sumRP/N	KVP39/ KVN10
	MP/N4 2-0=111	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +110R+VRCP/N0) /sumRP/N	KVP40/ KVN9
VgP6/VgN6	MP/N5 2-0=000	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N+110R+VRCP/N0 +VRCP/N1) /sumRP/N	KVP41/ KVN8
	MP/N5 2-0=001	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +112R+VRCP/N0+VRCP/N1) /sumRP/N	KVP42/ KVN7
	MP/N5 2-0=010	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +114R+VRCP/N0+VRCP/N1) /sumRP/N	KVP43/ KVN6
	MP/N5 2-0=011	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +116R+VRCP/N0+VRCP/N1) /sumRP/N	KVP44/ KVN5
	MP/N5 2-0=100	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +118R+VRCP/N0+VRCP/N1) /sumRP/N	KVP45/ KVN4
	MP/N5 2-0=101	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +120R+VRCP/N0+VRCP/N1) /sumRP/N	KVP46/ KVN3
	MP/N5 2-0=110	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +122R+VRCP/N0+VRCP/N1) /sumRP/N	KVP47/ KVN2
	MP/N5 2-0=111	VREG1-VD((VRP/N0+ VRTP/N+ VRMP/N +124R+VRCP/N0+VRCP/N1) /sumRP/N	KVP48/ KVN1
VgP7/VgN7	----	VREG1-VD((VRP/N0+ VRBP/N+ VRTP/N+ VRMP/N +104R+VRCP/N0+VRCP/N1) /sumRP/N	KVP49/ KVN0

$$\text{SumRP} = 124R + \text{VRP0} + \text{VRP1} + \text{VRTP} + \text{VRCP0} + \text{VRMP} + \text{VRCP1} + \text{VRBP}$$

$$\text{SumRN} = 124R + \text{VRP0} + \text{VRP1} + \text{VRTP} + \text{VRCP0} + \text{VRMP} + \text{VRCP1} + \text{VRBP}$$

$$\text{VD} = (\text{VREG1} - \text{VSS})$$

Table 5. 26 Voltage Calculation Formula

Grayscale Voltage	Formula	Grayscale Voltage	Formula
V0P/V63N	VgP/N0	V32P/V31N	VgP/N4+(VgP/N3-VgP/N4)*(11/23)
V1P/V62N	VgP/N1	V33P/V30N	VgP/N4+(VgP/N3-VgP/N4)*(10/23)
V2P/V61N	VgP/N2+(VgP/N1-VgP/N2)*CT1	V34P/V29N	VgP/N4+(VgP/N3-VgP/N4)*(9/23)
V3P/V60N	VgP/N2+(VgP/N1-VgP/N2)*CT2	V35P/V28N	VgP/N4+(VgP/N3-VgP/N4)*(8/23)
V4P/V59N	VgP/N2+(VgP/N1-VgP/N2)*CT3	V36P/V27N	VgP/N4+(VgP/N3-VgP/N4)*(7/23)
V5P/V58N	VgP/N2+(VgP/N1-VgP/N2)*CT4	V37P/V26N	VgP/N4+(VgP/N3-VgP/N4)*(6/23)
V6P/V57N	VgP/N2+(VgP/N1-VgP/N2)*CT5	V38P/V25N	VgP/N4+(VgP/N3-VgP/N4)*(5/23)
V7P/V56N	VgP/N2+(VgP/N1-VgP/N2)*CT6	V39P/V24N	VgP/N4+(VgP/N3-VgP/N4)*(4/23)
V8P/V55N	VgP/N2	V40P/V23N	VgP/N4+(VgP/N3-VgP/N4)*(3/23)
V9P/V54N	VgP/N3+(VgP/N2-VgP/N3)*(22/24)	V41P/V22N	VgP/N4+(VgP/N3-VgP/N4)*(2/23)
V10P/V53N	VgP/N3+(VgP/N2-VgP/N3)*(20/24)	V42P/V21N	VgP/N4+(VgP/N3-VgP/N4)*(1/23)
V11P/V52N	VgP/N3+(VgP/N2-VgP/N3)*(18/24)	V43P/V20N	VgP/N4
V12P/V51N	VgP/N3+(VgP/N2-VgP/N3)*(16/24)	V44P/V19N	VgP/N5+(VgP/N4-VgP/N5)*(22/24)
V13P/V50N	VgP/N3+(VgP/N2-VgP/N3)*(14/24)	V45P/V18N	VgP/N5+(VgP/N4-VgP/N5)*(20/24)
V14P/V49N	VgP/N3+(VgP/N2-VgP/N3)*(12/24)	V46P/V17N	VgP/N5+(VgP/N4-VgP/N5)*(18/24)
V15P/V48N	VgP/N3+(VgP/N2-VgP/N3)*(10/24)	V47P/V16N	VgP/N5+(VgP/N4-VgP/N5)*(16/24)
V16P/V47N	VgP/N3+(VgP/N2-VgP/N3)*(8/24)	V48P/V15N	VgP/N5+(VgP/N4-VgP/N5)*(14/24)
V17P/V46N	VgP/N3+(VgP/N2-VgP/N3)*(6/24)	V49P/V14N	VgP/N5+(VgP/N4-VgP/N5)*(12/24)
V18P/V45N	VgP/N3+(VgP/N2-VgP/N3)*(4/24)	V50P/V13N	VgP/N5+(VgP/N4-VgP/N5)*(10/24)
V19P/V44N	VgP/N3+(VgP/N2-VgP/N3)*(2/24)	V51P/V12N	VgP/N5+(VgP/N4-VgP/N5)*(8/24)
V20P/V43N	VgP/N3	V52P/V11N	VgP/N5+(VgP/N4-VgP/N5)*(6/24)
V21P/V42N	VgP/N4+(VgP/N3-VgP/N4)*(22/23)	V53P/V10N	VgP/N5+(VgP/N4-VgP/N5)*(4/24)
V22P/V41N	VgP/N4+(VgP/N3-VgP/N4)*(21/23)	V54P/V9N	VgP/N5+(VgP/N4-VgP/N5)*(2/24)
V23P/V40N	VgP/N4+(VgP/N3-VgP/N4)*(20/23)	V55P/V8N	VgP/N5
V24P/V39N	VgP/N4+(VgP/N3-VgP/N4)*(19/23)	V56P/V7N	VgP/N6+(VgP/N5-VgP/N6)*CB1
V25P/V38N	VgP/N4+(VgP/N3-VgP/N4)*(18/23)	V57P/V6N	VgP/N6+(VgP/N5-VgP/N6)*CB2
V26P/V37N	VgP/N4+(VgP/N3-VgP/N4)*(17/23)	V58P/V5N	VgP/N6+(VgP/N5-VgP/N6)*CB3
V27P/V36N	VgP/N4+(VgP/N3-VgP/N4)*(16/23)	V59P/V4N	VgP/N6+(VgP/N5-VgP/N6)*CB4
V28P/V35N	VgP/N4+(VgP/N3-VgP/N4)*(15/23)	V60P/V3N	VgP/N6+(VgP/N5-VgP/N6)*CB5
V29P/V34N	VgP/N4+(VgP/N3-VgP/N4)*(14/23)	V61P/V2N	VgP/N6+(VgP/N5-VgP/N6)*CB6
V30P/V33N	VgP/N4+(VgP/N3-VgP/N4)*(13/23)	V62P/V1N	VgP/N6
V31P/V32N	VgP/N4+(VgP/N3-VgP/N4)*(12/23)	V63P/V0N	VgP/N7

Table 5. 27 Voltage Calculation Formula of Grayscale Voltage



CGM0[1:0]	“00”	“01”	“10”	“11”
CT1	6/7	7.5/10.5	10/15	8.5/10.5
CT2	5/7	6/10.5	6.67/15	6.67/10.5
CT3	4/7	4/10.5	4/15	5.0/10.5
CT4	3/7	3/10.5	3/15	3.5/10.5
CT5	2/7	2/10.5	2/15	2.17/10.5
CT6	1/7	1/10.5	1/15	1/10.5

Note: Negative gamma don't have CGM0/CGM1 setting, the ratio V2~V7 and V56~V61 is automatically mapping from positive side.

Table 5. 28 Voltage Calculation Formula of Grayscale Voltage V2~V7 and V56~V61

CGM1[1:0]	“00”	“01”	“10”	“11”
CB1	6/7	9.5/10.5	14/15	9.5/10.5
CB2	5/7	8.5/10.5	13/15	8.33/10.5
CB3	4/7	7.5/10.5	12/15	7.0/10.5
CB4	3/7	6.5/10.5	11/15	5.5/10.5
CB5	2/7	4.5/10.5	8.33/15	3.83/10.5
CB6	1/7	3.0/10.5	5/15	2.0/10.5

Himax Confidential
For DO Not Copy Only

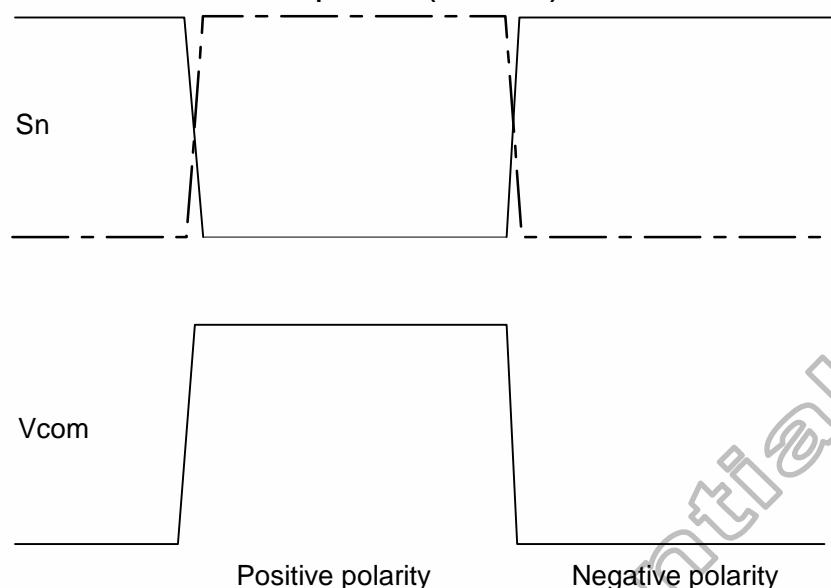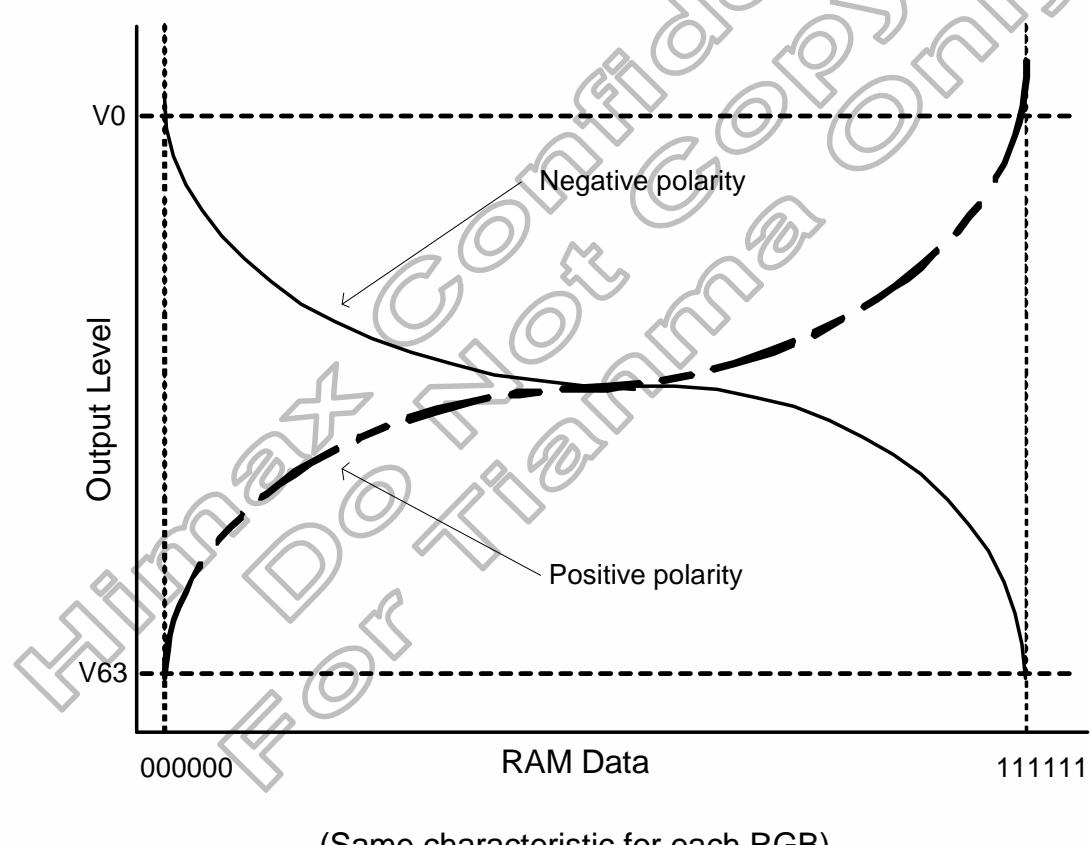Relationship between GRAM Data and Output Level (REV = "0")**Figure 5. 58 Relationship between Source Output and Vcom****Figure 5. 59 Relationship between GRAM Data and Output Level**

5.11.6 Gamma Curve Control

There are four kind of Gamma Curve is selected by GAMSET command. The parameter GC[7:0] is stored in internal register and used to select one set of gamma correction register.

GC_SEL= Low(VSSD):


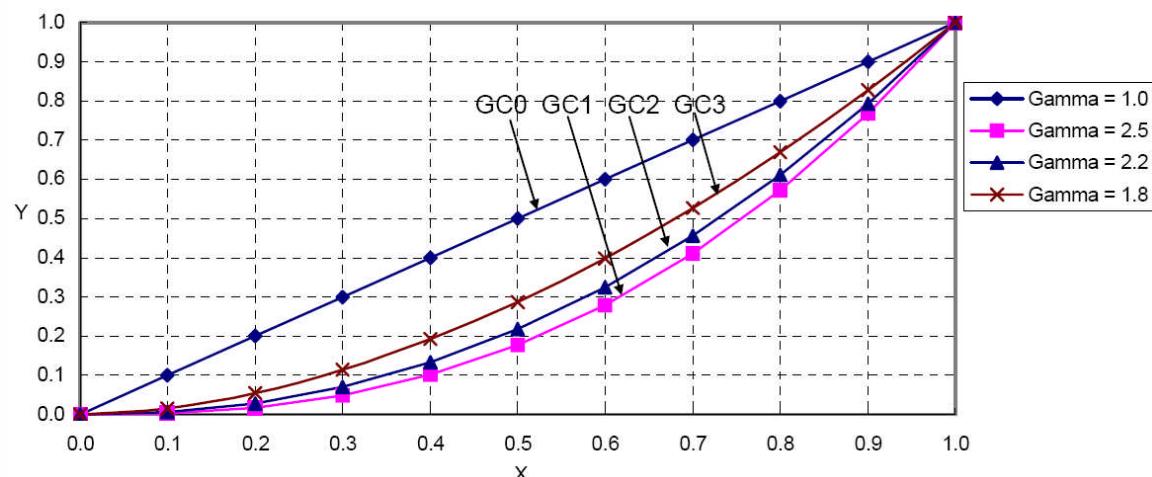


Figure 5. 60 Gamma Curve according to the GC0 to GC3 bit (GC_SEL=low)

GC_SEL= high (VDDI):

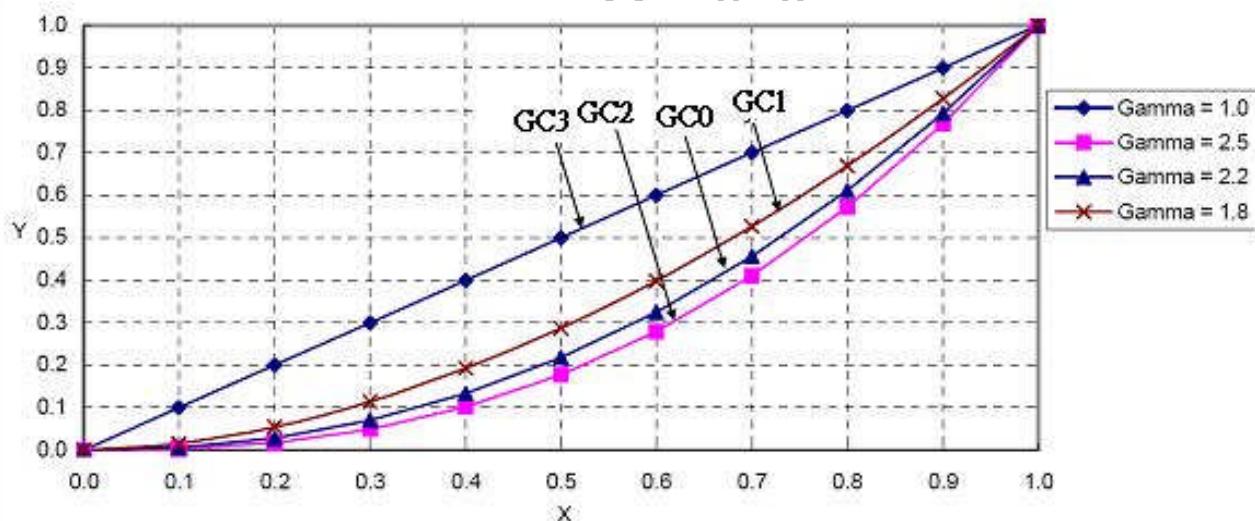

5.12 Oscillator

The HX8353-C can oscillate an internal R-C oscillator with an internal oscillation resistor (R_f). The oscillation frequency is changed according to the CADJ[3:0] and RADJ[2:0] internal register. Please refer to extended command set B0h. The default frequency is 1.5MHz.

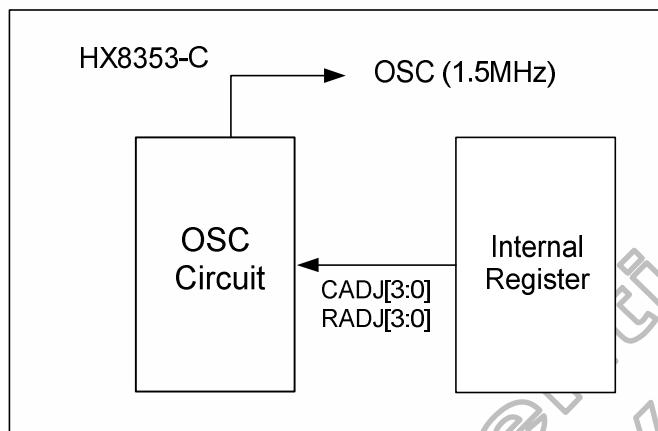


Figure 5. 61 Oscillation Circuit

5.13 Power On/Off Sequence

VDDI, VDD can be applied in any order. VDDI and VDD can be powered down in any order. During power off, if LCD is in the Sleep Out mode, VDDI and VDD must be powered down minimum 120msec after NRESET has been released. During power off, if LCD is in the Sleep In mode, VDDI or VDD can be powered down minimum 0msec after NRESET has been released. NCS can be applied at any timing or can be permanently grounded. NRESET has priority over NCS. There will be no damage to the display module if the power sequences are not met. There will be no abnormal visible effects on the display panel during the Power On/Off Sequences. There will be no abnormal visible effects on the display between end of Power On Sequence and before receiving Sleep Out command. Also between receiving Sleep In command and Power Off Sequence. If NRESET line is not held stable by host during Power On Sequence as defined in Sections 5.16.1 and 5.16.2, then it will be necessary to apply a Hardware Reset (NRESET) after Host Power On Sequence is complete to ensure correct operation. Otherwise function is not guaranteed. The power on/off sequence is illustrated below:

Himax Confidential
For DO Not Copy Only
Tianma

5.13.1 Case 1 – NRESET line is hold High or Unstable by Host at Power On

If NRESET line is held high or unstable by the host during Power On, then a Hardware Reset must be applied after both VDD and VDDI have been applied - otherwise correct functionality is not guaranteed. There is no timing restriction upon this hardware reset.

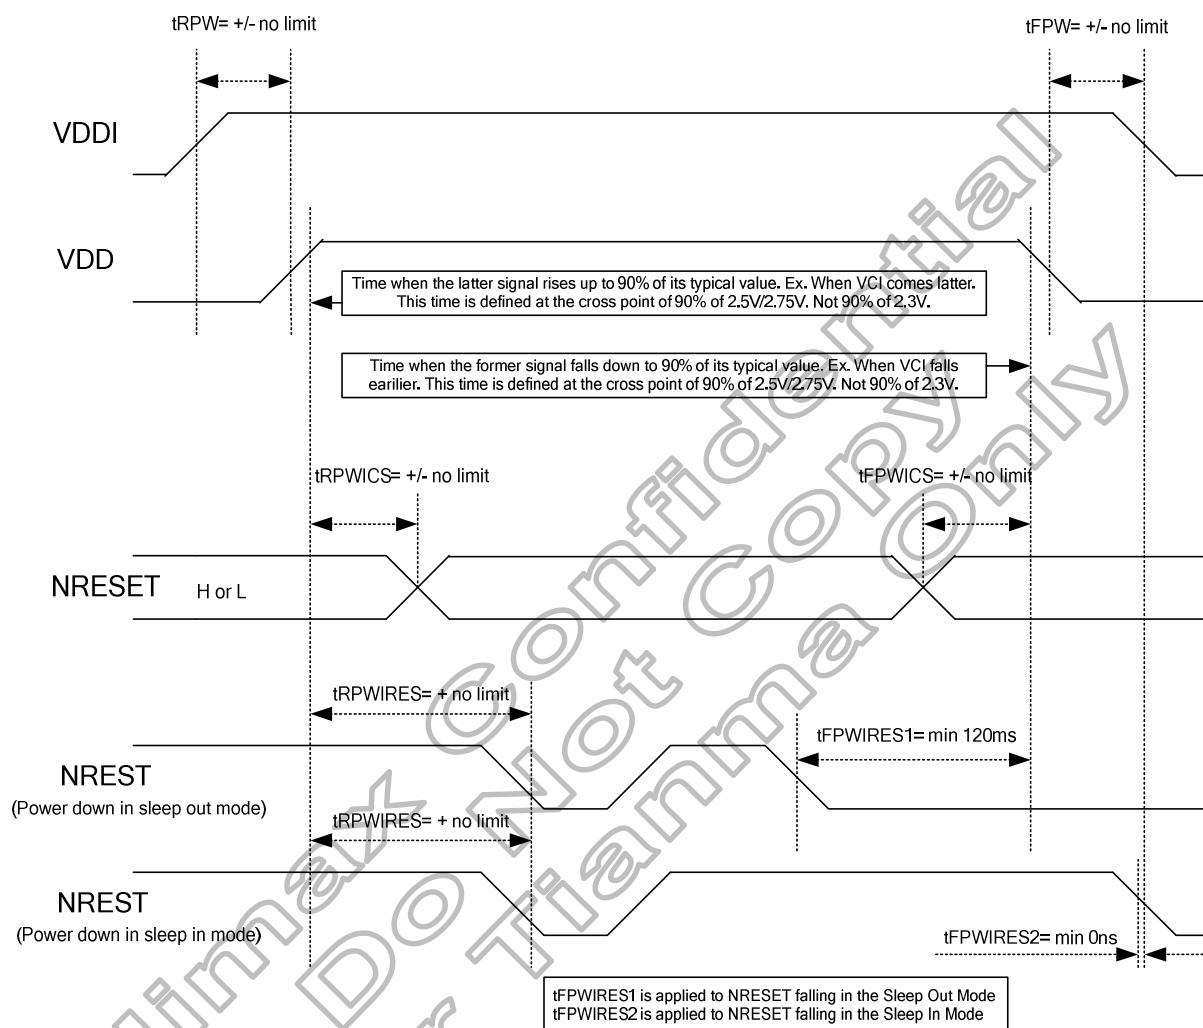


Figure 5. 62 Case 1 – NRESET line is hold High or Unstable by Host at Power On

5.13.2 Case 2 – NRESET line is held Low by host at Power On

If NRESET line is held Low (and stable) by the host during Power On, then the NRESET must be held low for minimum 10 μ sec after both VDD and VDDI have been applied.

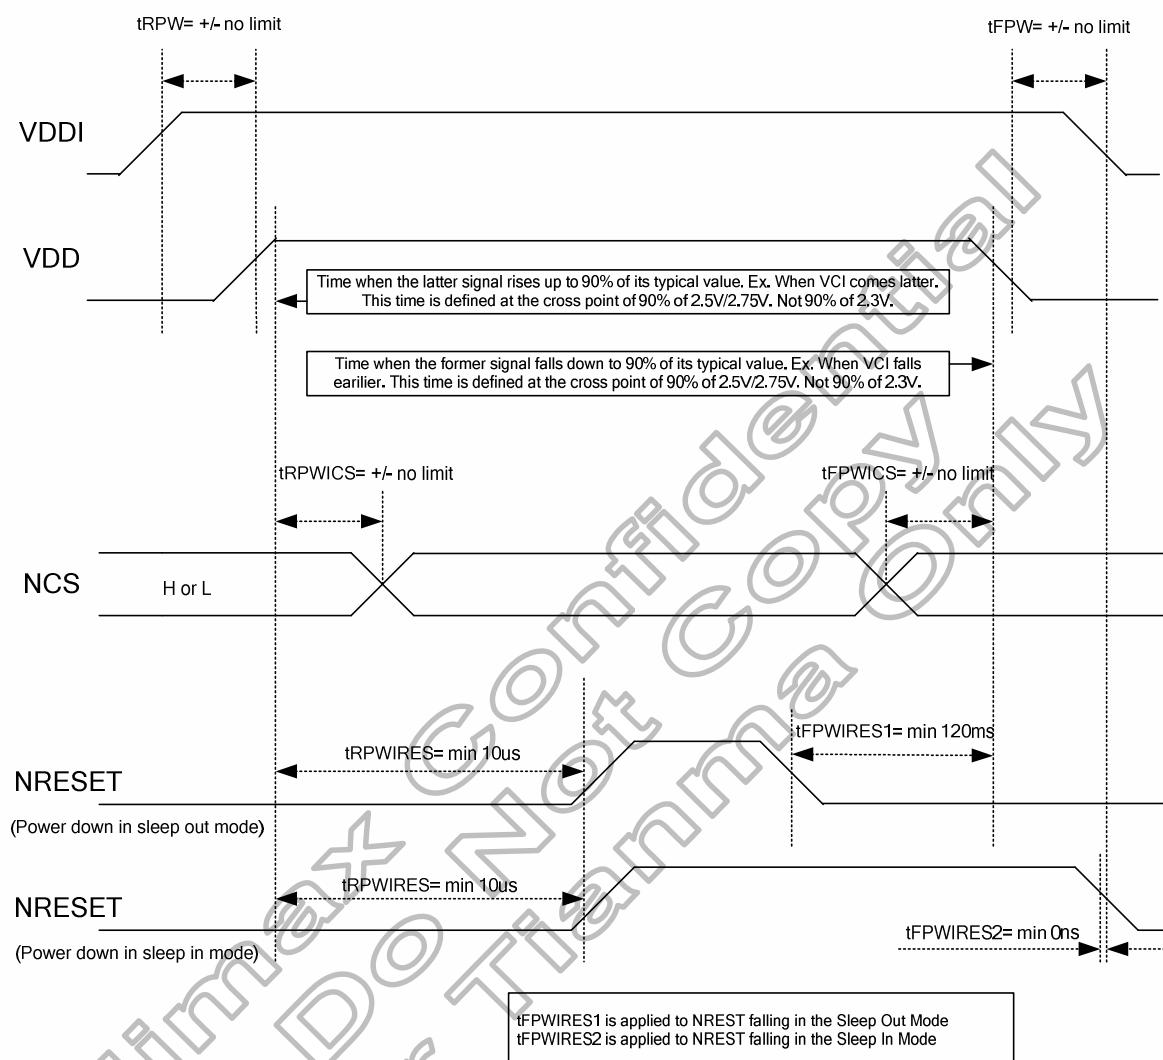


Figure 5. 63 NRESET line is held Low by host at Power On

5.14 Uncontrolled Power Off

The uncontrolled power off means a situation when e.g. there is removed a battery without the controlled power off sequence. There will not be any damages for the display module or the display module will not cause any damages for the host or lines of the interface. At an uncontrolled power off the display will go blank and there will not be any visible effects within 1 second on the display (blank display) and remains blank until "Power On Sequence" powers it up.

Himax Confidential
For DO Not Copy Only
Tianma

5.15 Power Flow Chart for Different Power Mode

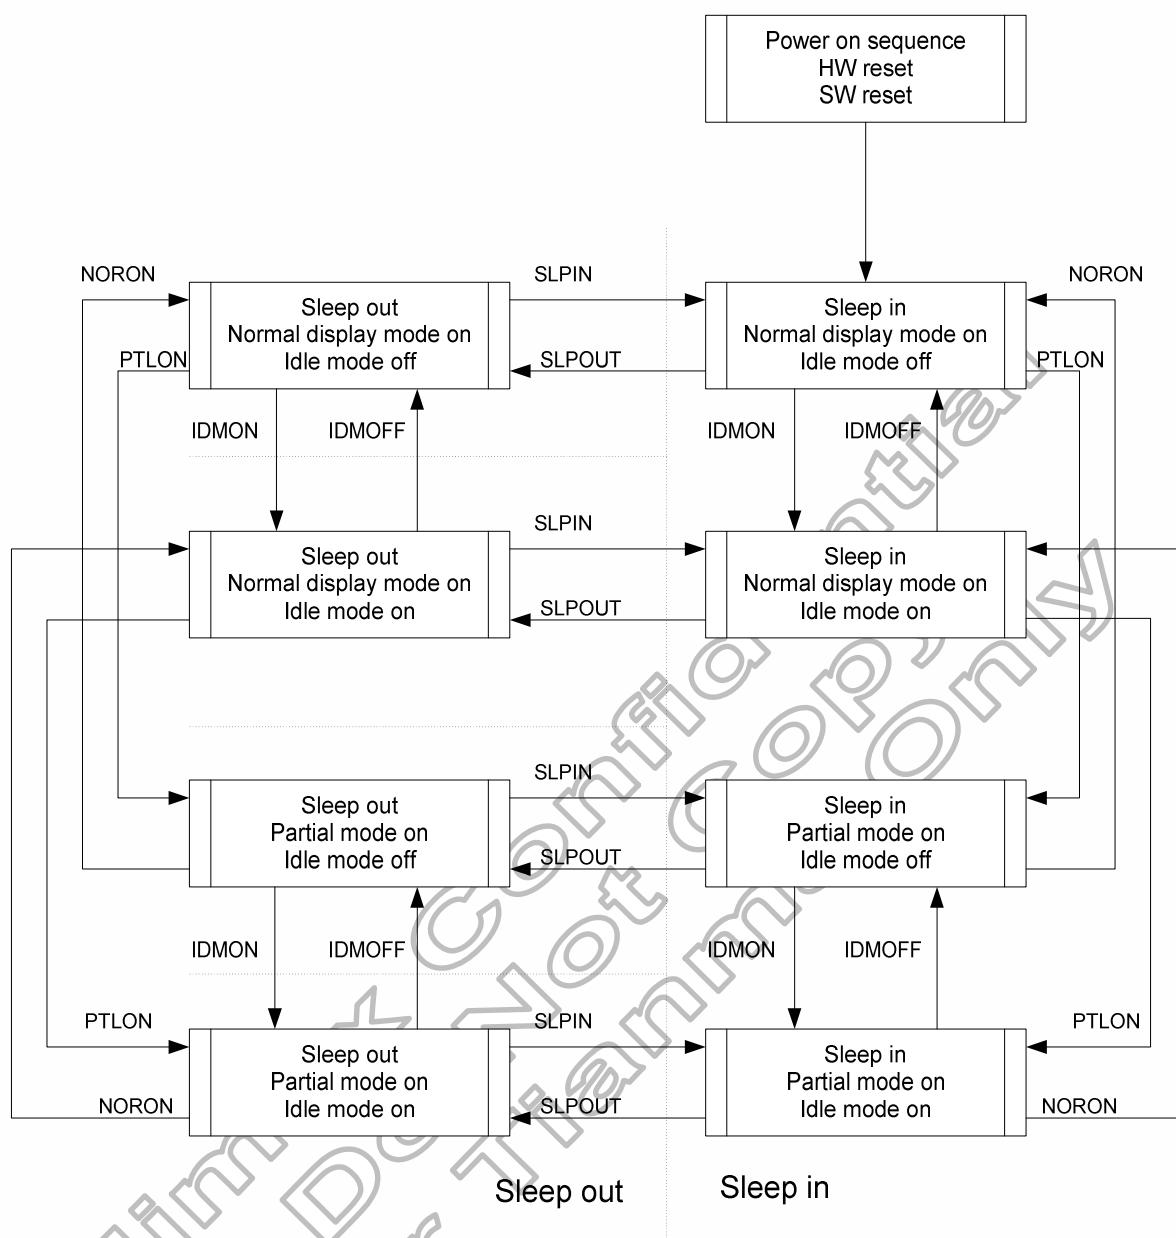


Figure 5. 64 Power Flow Chart for Different Power Modes

5.16 Input/Output Pin State

5.16.1 Output or Bi-directional (I/O) Pins

Output or Bi-directional pins	After Power On	After Hardware Reset	After Software Reset
TE	Low	Low	Low
DB17 to DB0 (Output driver)	High-Z (Inactive)	High-Z (Inactive)	High-Z (Inactive)
VTESTOUT	Low	Low	Low

Note: There will be no output from D17-D0 during Power On/Off sequence, Hardware Reset and Software Reset.

Table 5. 29 The State of Output or Bi-directional (I/O) Pins

5.16.2 Input Pins

Input pins	During Power On Process	After Power On	After Hardware Reset	After Software Reset	During Power Off Process
NRESET	See Section 5.17	Input valid	Input valid	Input valid	See Section 5.17
NCS	Input valid	Input valid	Input valid	Input valid	Input valid
SPI_SEL	Input valid	Input valid	Input valid	Input valid	Input valid
GC_SEL	Input valid	Input valid	Input valid	Input valid	Input valid
LC_SEL0, LC_SEL1	Input valid	Input valid	Input valid	Input valid	Input valid
DNC_SCL	Input valid	Input valid	Input valid	Input valid	Input valid
NWR_RNW	Input valid	Input valid	Input valid	Input valid	Input valid
NRD_E	Input valid	Input valid	Input valid	Input valid	Input valid
DB17 to DB0	Input valid	Input valid	Input valid	Input valid	Input valid
OSC,P68,BS1,BS2,BS0	Input valid	Input valid	Input valid	Input valid	Input valid
EXTC	Input valid	Input valid	Input valid	Input valid	Input valid
TEST1	Input valid	Input valid	Input valid	Input valid	Input valid
TEST2	Input valid	Input valid	Input valid	Input valid	Input valid
TEST3	Input valid	Input valid	Input valid	Input valid	Input valid
RSO0	Input valid	Input valid	Input valid	Input valid	Input valid
RSO1	Input valid	Input valid	Input valid	Input valid	Input valid
RSO2	Input valid	Input valid	Input valid	Input valid	Input valid

Table 5. 30 The State of Input Pins


5.17 Sleep Out – Command and Self-Diagnostic Functions of the Display Module

5.17.1 Register loading Detection

Sleep Out-command (See section 6.2.12 “Sleep Out (11h)”) is a trigger for an internal function of the display module, which indicates, if the display module loading function of factory default values from OTP (or similar device) to registers of the display controller is working properly.

There are compared factory values of the OTP and register values of the display controller by the display controller. If those both values (OTP and register values) are same, there is inverted (=increased by 1) a bit, which is defined in command 6.2.10 “Read Display Self-Diagnostic Result (0Fh)” (=RDDSDR) (The used bit of this command is D7). If those both values are not same, this bit (D7) is not inverted (=increased by 1).

The flow chart for this internal function is following:

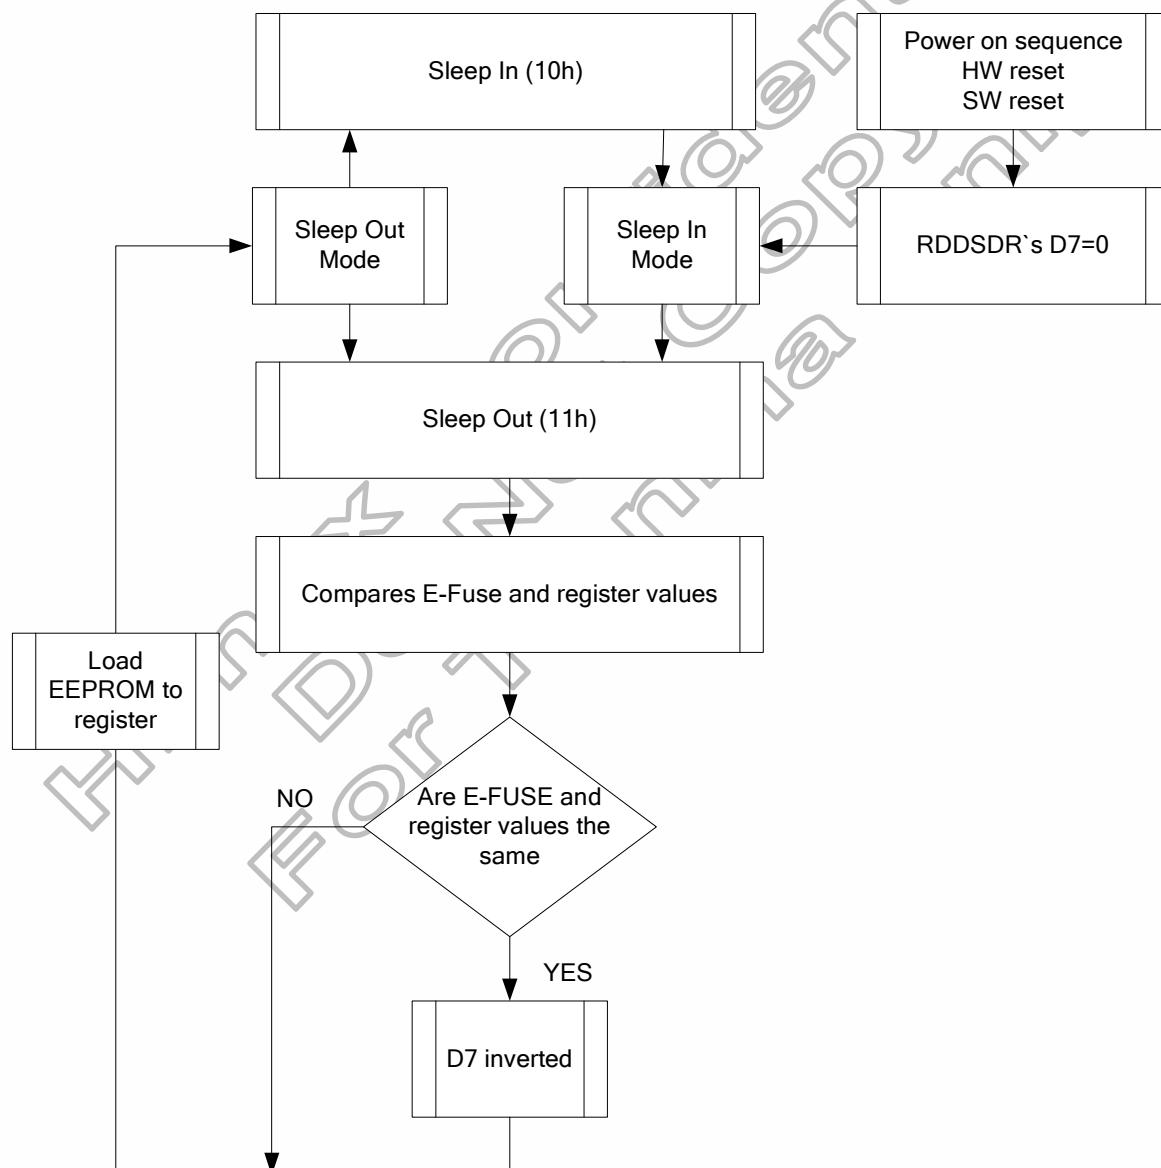


Note: There is not compared and loaded register values, which can be changed by User (User area commands: 00h to AFh and DAh to DDh), by the display module.

Figure 5. 65 Register loading Detection Flow

5.17.2 Functionality Detection

Sleep Out-command (See section 6.2.12 "Sleep Out (11h)") is a trigger for an internal function of the display module, which indicates, if the display module is still running and meets functionality requirements.

The internal function (= the display controller) is comparing, if the display module is still meeting functionality requirements (e.g. booster voltage levels, timings, etc.). If functionality requirement is met, there is inverted (= increased by 1) a bit, which is defined in command 6.2.10 "Read Display Self-Diagnostic Result (0Fh)" (= RDDSDR) (The used bit of this command is D6). If functionality requirement is not same, this bit (D6) is not inverted (= increased by 1). The flow chart for this internal function is following:

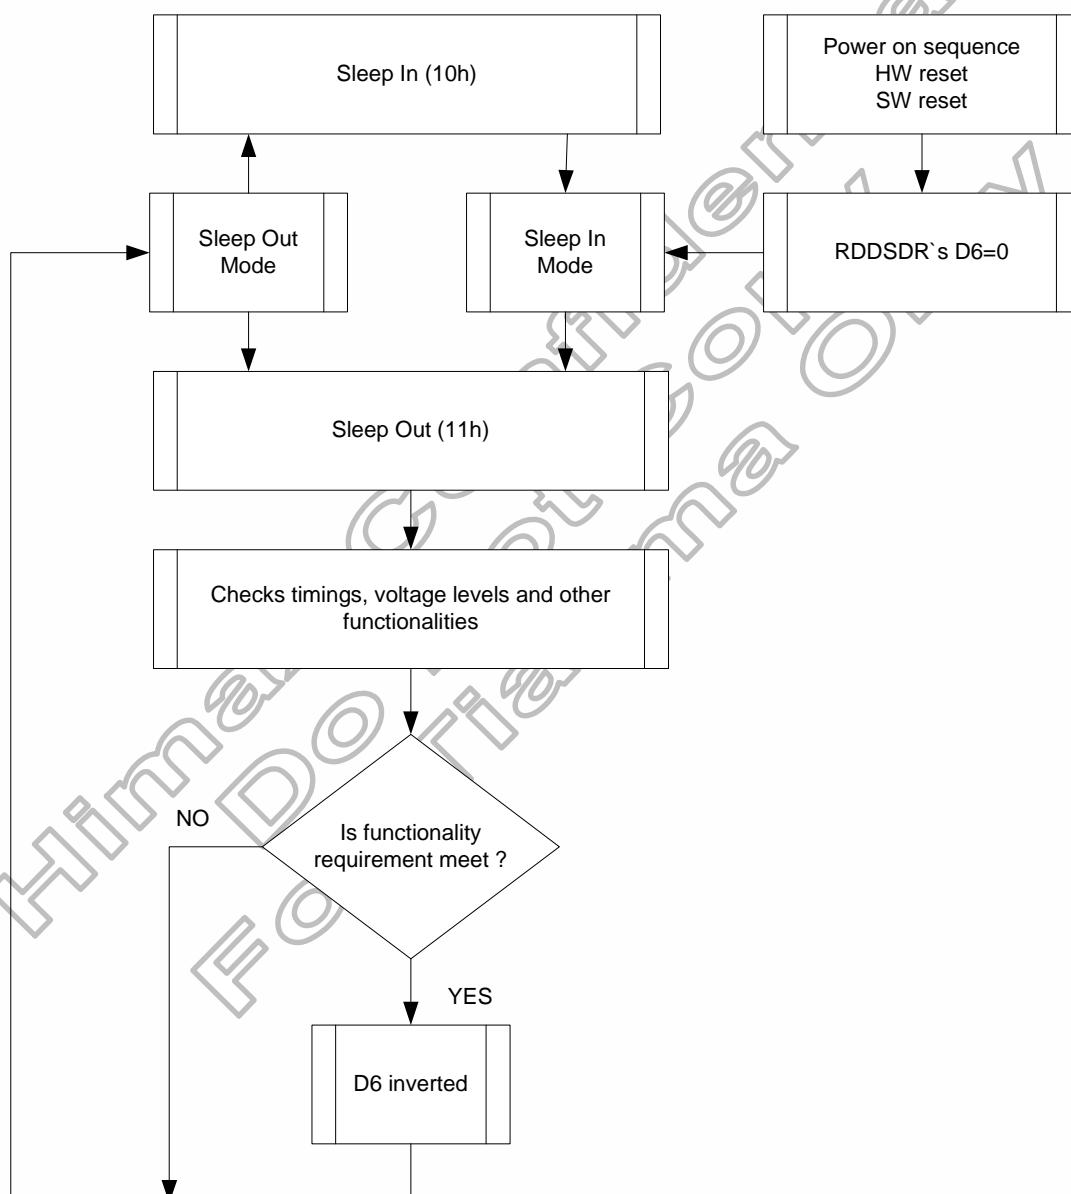

Note: There is needed 120msec after Sleep Out -command, when there is changing from Sleep In -mode to Sleep Out -mode, before there is possible to check if User's functionality requirements are met and a value of RDDSDR's D6 is valid. Otherwise, there is 5msec delay for D6's value, when Sleep Out -command is sent in Sleep Out -mode.

Figure 5. 66 Functionality Detection Flow

5.18 OTP Programming

OTP index	[7:0]								
0	CADJ[3]	CADJ[2]	CADJ[1]	CADJ[0]	BGP[3]	BGP[2]	BGP[1]	BGP[0]	
1	ID1[7]	ID1[6]	ID1[5]	ID1[4]	ID1[3]	ID1[2]	ID1[1]	ID1[0]	
2	NVALID_VCM0	VCM0[6]	VCM0[5]	VCM0[4]	VCM0[3]	VCM0[2]	VCM0[1]	VCM0[0]	
3	NVALID_VCM1	VCM1[6]	VCM1[5]	VCM1[4]	VCM1[3]	VCM1[2]	VCM1[1]	VCM1[0]	
4	NVALID_VCM2	VCM2[6]	VCM2[5]	VCM2[4]	VCM2[3]	VCM2[2]	VCM2[1]	VCM2[0]	
5	LUT_EN	RADJ[1]	RADJ[0]	VDV[4]	VDV[3]	VDV[2]	VDV[1]	VDV[0]	
6	NVALID1	ID2[6]	ID2[5]	ID2[4]	ID2[3]	ID2[2]	ID2[1]	ID2[0]	
7	ID3[7]	ID3[6]	ID3[5]	ID3[4]	ID3[3]	ID3[2]	ID3[1]	ID3[0]	

Table 5. 31 OTP memory table


For OSC adjust and BGAP voltage adjust are valid only Himax provide)
For Module suplier program

Note 1: (1) The default value of OTP memory bits are all "0".


Note 2: NAVLID1, NVALID_VCM[2:0] bit decide the OPT reload Enable/Disable, the default value is "0". If the own OTP area of NAVILD bit had been programmed, the NAVILD bit will be changed to "1" automatically and execute the OTP reload.

For example:

Condition 1: Programmed all index of 0X01h, 0X06h and 0X07h

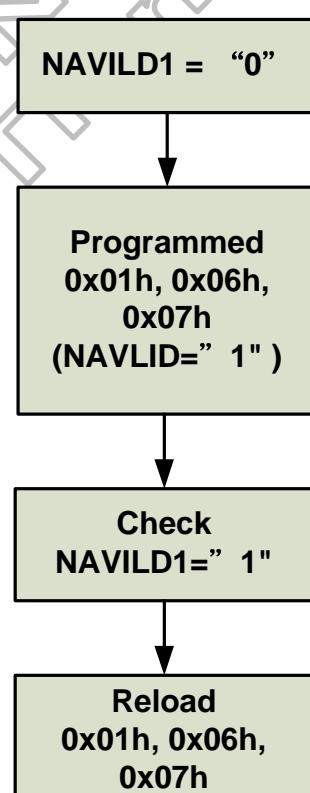

Condition 2: Do not program all index of 0X01h, 0X06h and 0X07h

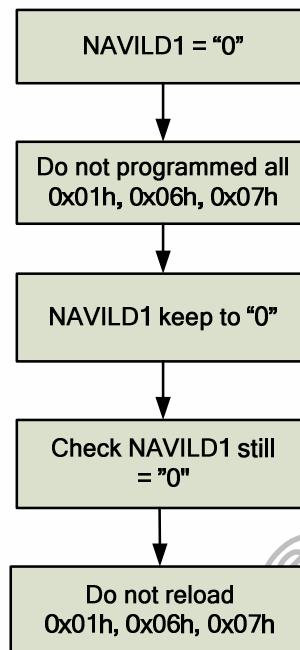

Note 3: There are some conditions that HX8353-C can reload OTP.

1. Hardware reset
2. Software reset
3. SLPOUT command.

Note 4: User can use GETOTP command to read back the OTP values. Similarly, the user also can use GETOTP to read the index 0x02h, 0x03h and 0x04h that is defined the NVALID bit for VCM0, VCM1 and VCM2 (NVALID_VCM0, NAVLID_VCM1 and NAVLID_VCM2). User can read back the NVALID_VCM0, NAVLID_VCM1 and NAVLID_VCM2 (use GETOTP command to know how many times of VCM had programmed on OTP).

	NVALID_VCM2	NVALID_VCM1	NVALID_VCM0
Programed 0 time	0	0	0
Programed 1 time	0	0	1
Programed 2 times	0	1	1
Programed 3 times	1	1	1

Programming Flow


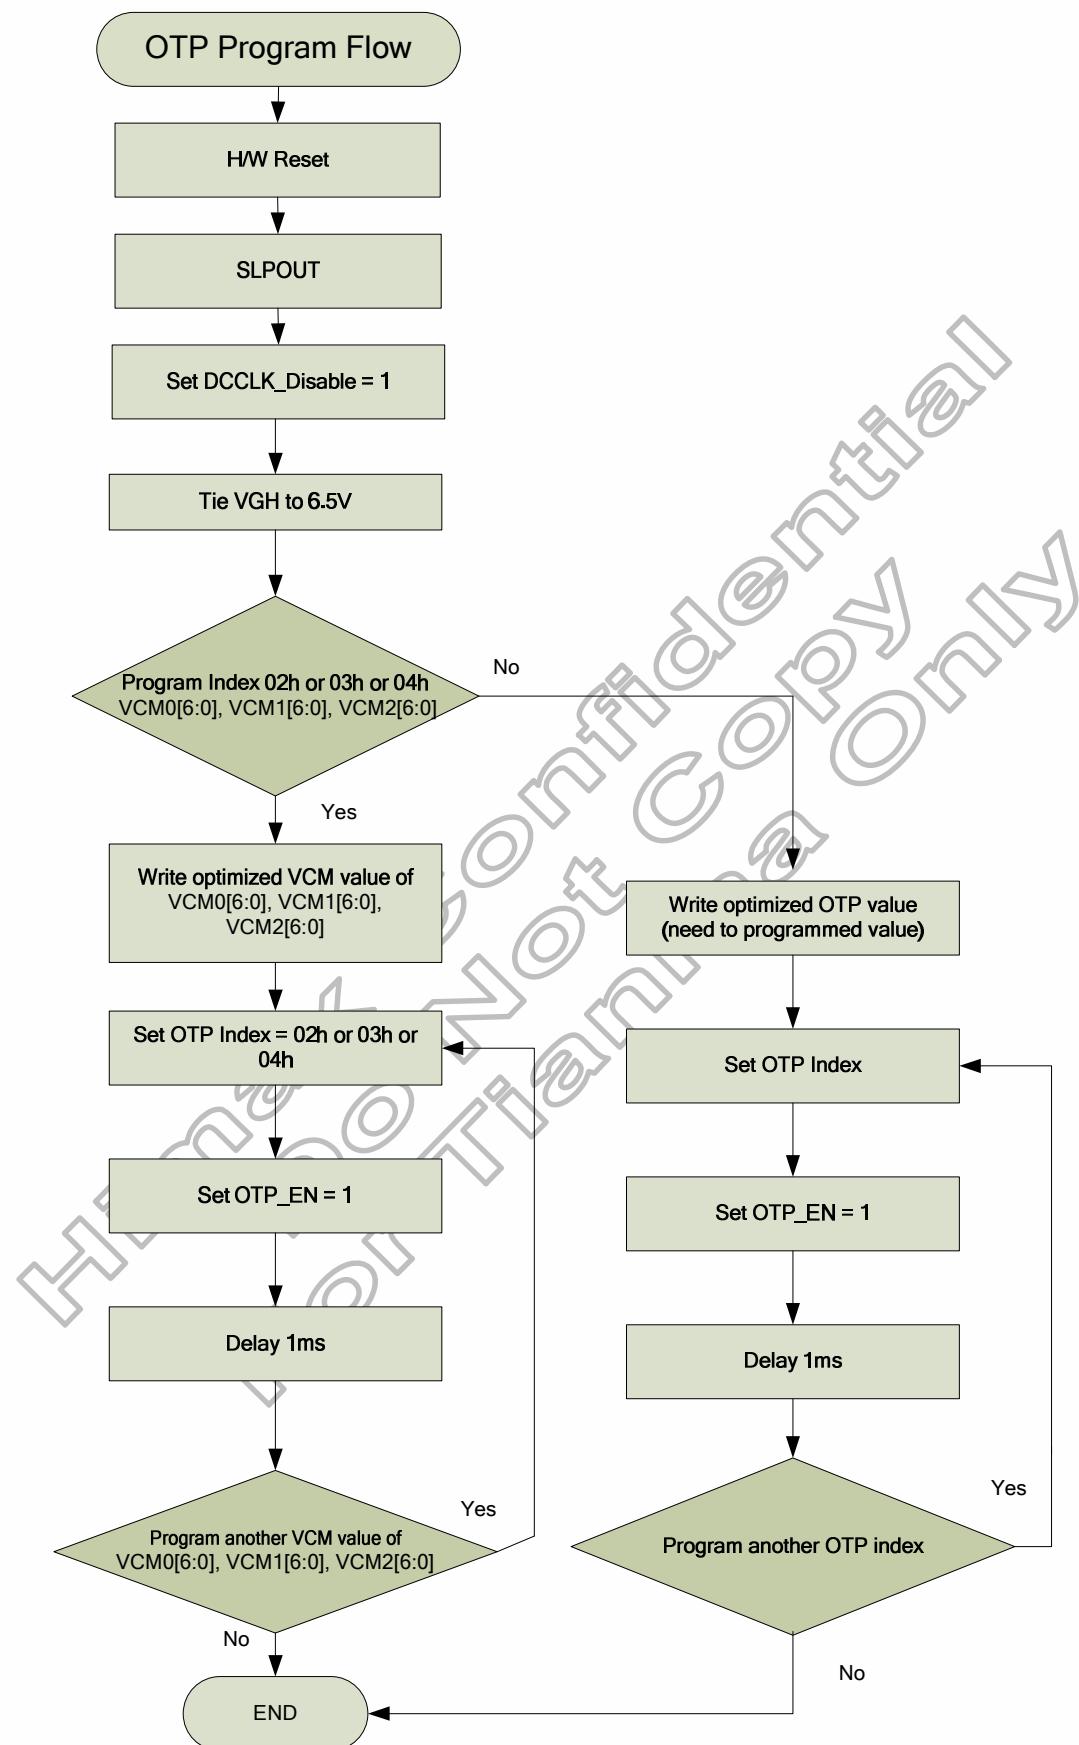


Figure 5. 67 OTP Programming Flow

Programming sequence

Step	Operation																										
1	Power on and reset the module																										
2	Set OTP_LOAD_DISABLE=1, disable the auto-loading function.																										
3	SLPOUT command (11h)																										
4	Wait 120ms																										
5	Write optimized value to related register	<table border="1"> <thead> <tr> <th>Command</th> <th>Register</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td rowspan="2">SETVCOM (B6h)</td> <td>VCM[6:0]</td> <td>VcomH voltage for normal mode, Idle mode and Partial Idle mode (High level voltage of VCOM)</td> </tr> <tr> <td>VDV[4:0]</td> <td>Vcom amplitude (VcomL = VcomH – Vcom amplitude, VcomL ≥ VCL+0.5V)</td> </tr> <tr> <td rowspan="3">SETID (C4h)</td> <td>ID1[7:0]</td> <td>LCD module/driver version</td> </tr> <tr> <td>ID2[6:0]</td> <td>LCD module/driver version</td> </tr> <tr> <td>ID3[7:0]</td> <td>Identifies the LCD module/driver</td> </tr> </tbody> </table>		Command	Register	Description	SETVCOM (B6h)	VCM[6:0]	VcomH voltage for normal mode, Idle mode and Partial Idle mode (High level voltage of VCOM)	VDV[4:0]	Vcom amplitude (VcomL = VcomH – Vcom amplitude, VcomL ≥ VCL+0.5V)	SETID (C4h)	ID1[7:0]	LCD module/driver version	ID2[6:0]	LCD module/driver version	ID3[7:0]	Identifies the LCD module/driver									
Command	Register	Description																									
SETVCOM (B6h)	VCM[6:0]	VcomH voltage for normal mode, Idle mode and Partial Idle mode (High level voltage of VCOM)																									
	VDV[4:0]	Vcom amplitude (VcomL = VcomH – Vcom amplitude, VcomL ≥ VCL+0.5V)																									
SETID (C4h)	ID1[7:0]	LCD module/driver version																									
	ID2[6:0]	LCD module/driver version																									
	ID3[7:0]	Identifies the LCD module/driver																									
6	Set OTP_DCCLK_DISABLE=1, disable internal pumping clock.																										
7	Connect external power 6.5V to VGH pin																										
8	Wait 100ms for external power 6.5V to stabilize.																										
9	Specify OTP_index	<table border="1"> <thead> <tr> <th>OTP_index (Write – For Program)</th> <th>OTP_index (Read – For get OTP value)</th> <th>Parameter</th> </tr> </thead> <tbody> <tr> <td>0x05h</td> <td>0x05h</td> <td>VDV[4:0],</td> </tr> <tr> <td>0x06h</td> <td>0x06h</td> <td>ID2[6:0]</td> </tr> <tr> <td>0x07h</td> <td>0x07h</td> <td>ID3[7:0]</td> </tr> <tr> <td>0x01h</td> <td>0x01h</td> <td>ID1[7:0]</td> </tr> <tr> <td>0x02h</td> <td>0x02h</td> <td>VCM0[6:0]</td> </tr> <tr> <td>0x03h</td> <td>0x03h</td> <td>VCM1[6:0]</td> </tr> <tr> <td>0x04h</td> <td>0x04h</td> <td>VCM2[6:0]</td> </tr> </tbody> </table>		OTP_index (Write – For Program)	OTP_index (Read – For get OTP value)	Parameter	0x05h	0x05h	VDV[4:0],	0x06h	0x06h	ID2[6:0]	0x07h	0x07h	ID3[7:0]	0x01h	0x01h	ID1[7:0]	0x02h	0x02h	VCM0[6:0]	0x03h	0x03h	VCM1[6:0]	0x04h	0x04h	VCM2[6:0]
OTP_index (Write – For Program)	OTP_index (Read – For get OTP value)	Parameter																									
0x05h	0x05h	VDV[4:0],																									
0x06h	0x06h	ID2[6:0]																									
0x07h	0x07h	ID3[7:0]																									
0x01h	0x01h	ID1[7:0]																									
0x02h	0x02h	VCM0[6:0]																									
0x03h	0x03h	VCM1[6:0]																									
0x04h	0x04h	VCM2[6:0]																									
10	Set OTP_Mask=0x00h, programming the entire bit of one parameter.																										
11	Set OTP_EN=1, Internal register begin write to OTP according to OTP_index.																										
12	Wait 1 ms																										
13	Complete programming one parameter to OTP. If continue to programming other parameter, return to step (9). Otherwise, power off the module and remove the external power on VGH pin.																										

Programming circuitry

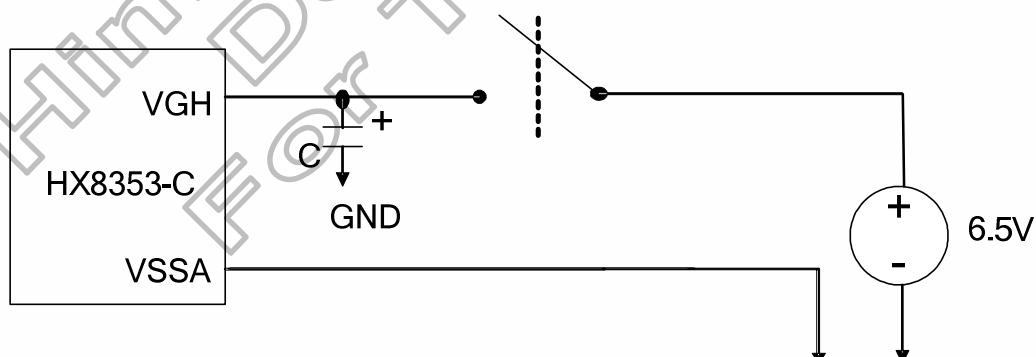

Note: (1) Connect external power at Step 7
(2) C:1uF(bult-in on the module)

5.19 Free Running Mode Specification

Burn-in of TFT displays consists of driving each module for 10hr at a temperature of 60°C. In order to drive the modules, it requires extra electronics. To reduce the burn-in cost, it is requested that the driver IC will generate the required display image without requiring extra electronics. We term this a free running mode (FR-mode). For burn-in, it is sufficient that the display is powered up with a plane saturated black or saturated white pattern. Black should be used for burn-in, since this result in a larger pixel voltage. White is used to verify if the free running mode is properly functioning. Please note that the black and the white pattern are reversed in case of a normally black display.

Parameter	Symbol	Description
Power supply pins	VDDI, VDD	All power supply pins
Free running mode	BURN	BURN=1, FR-mode is enabled.
Reset	NRESET	Active low pulse in order to start the FR-mode.
Chip select ⁽¹⁾	NCS	This pin will be left open during FRM mode.
Reads/not write ⁽¹⁾	NWR_RNW	This pin will be left open during FRM mode.
Data/not command ⁽¹⁾	DNC_SCL	This pin will be left open during FRM mode.
SPI I/F select ⁽¹⁾	SPI_SEL	This pin will be left open during FRM mode.
TE select	STE_SEL	This pin will be left open during FRM mode.
CPU I/F Data ⁽¹⁾	D[0..17]	This pin will be left open during FRM mode.
SPI I/F	SCL	This pin will be left open during FRM mode.

Note: (1) As a general rule, all control pins of the interfaces like chip-select, data-enable, etc, must be disabled, all modes select pins like data-not-command, interface-select etc and all data-bus pins must be set to either logic high or logic low during the FR-mode.

Table 5. 32 Pin Information

Power-on Sequence of Free Running Mode

The FR-mode starts automatically after the power supply is switched on and a reset pulse is applied to the Reset-pin, if the BURN pin is set to logical high. In case of separate supply pins for the analogue supply and digital supply, both supply pins will be connected together, if it is supported by the driver specification. Otherwise, each supply voltage will be switched on separately according to the requested power-on sequence. The BURN and all other digital I/F pins, which will be set to logic high during the free running mode, can be switched to logic high together with the digital supply pin. The FR-mode will be restarted if the reset pulse is applied a second time. The OTP starts to load when Reset leaves low to high.

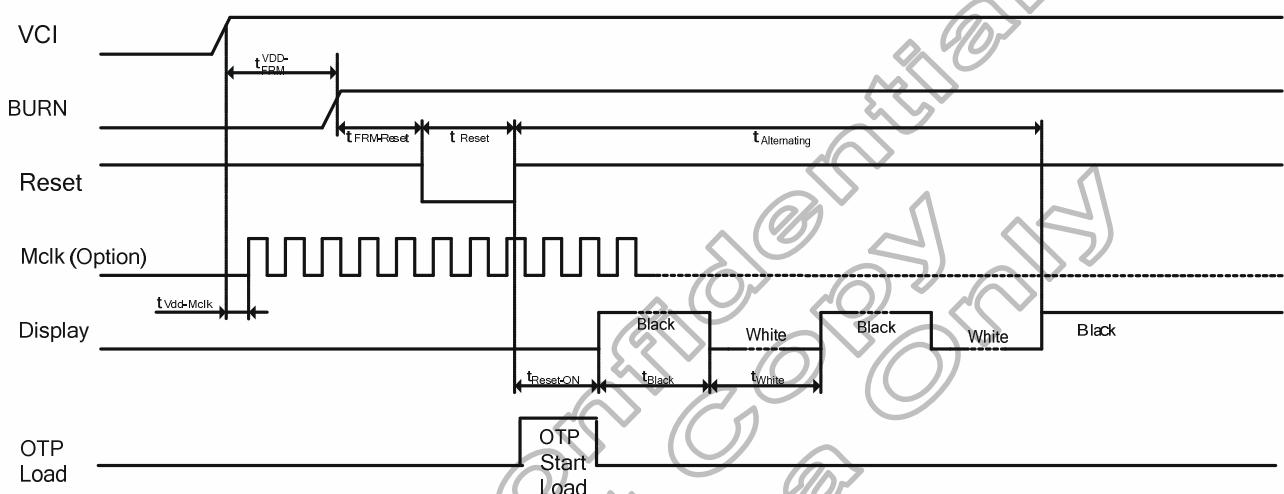


Figure 5.68 Power On Sequence of FR-mode (for Normally-White Panel)

Power off Sequence of Free Running Mode

The power supply can be switched off any time.

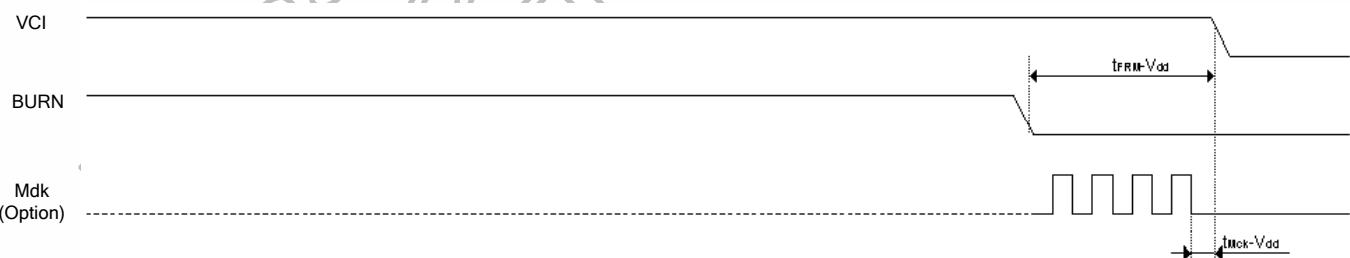


Figure 5.69 Power Off Sequence of FR-mode

Free Running Mode Display

The display will show an alternating black and white picture for about the first 5 minutes. The black to white ratio shall be 50%/50%. The time of the black and white pattern shall be around 1 second in order to avoid a too long waiting time to verify that the FR-mode is functioning properly. The display is switched to a static black pattern after the alternating mode is finished. Thus, most efficient burn-in stress is ensured. The display shall work in idle-mode. There is no special restriction for the frame frequency. The frame frequency will be set according to the parameter in the OTP.

Alternating Black and White Pattern	$t_{Alternating}$	-	5	-	min
Master Clock Frequency	f_{Mclk}	-	-	1.5	MHz

Table 5. 33 Frequency Definition of Free Running Mode Display

Himax Confidential
DO NOT Copy
For Tianma Only

6. Command

6.1 Command Compare Table

Table 6. 1 MPU Interface Command Set

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
00	NOP	0	↑	1	-	0	0	0	0	0	0	0	0	No Operation
01	SWRESET	0	↑	1	-	0	0	0	0	0	0	0	1	Software reset
04	RDDIDIF	0	↑	1	-	0	0	0	0	0	1	0	0	Read Display Identification Information
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	xx	xx	xx	xx	xx	xx	xx	xx	ID1 read
		1	1	↑	-	1	V6	V5	V4	V3	V2	V1	V0	ID2 read
		1	1	↑	-	xx	xx	xx	xx	xx	xx	xx	xx	ID3 read
09	RDDST	0	↑	1	-	0	0	0	0	1	0	0	1	Read Display Status
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[31:24]								
		1	1	↑	-	D[23:16]								
		1	1	↑	-	D[15:8]								
0A	RDDPM	0	↑	1	-	0	0	0	0	1	0	1	0	Read Display Power Mode
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								
0B	RDDMADCTL	0	↑	1	-	0	0	0	0	1	0	1	1	Read Display MADCTL
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								
0C	RDDCOLM OD	0	↑	1	-	0	0	0	0	1	1	0	0	Read Display Pixel Format
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								
0D	RDDIM	0	↑	1	-	0	0	0	0	1	1	0	1	Read Display Image Mode
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								
0E	RDDSM	0	↑	1	-	0	0	0	0	1	1	1	0	Read Display Signal Mode
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								
0F	RDDSDR	0	↑	1	-	0	0	0	0	1	1	1	1	Read Display Self-Diagnostic Result
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	D[7:0]								

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
10	SLPIN	0	↑	1	-	0	0	0	1	0	0	0	0	Sleep in and charge-pump off
11	SLPOUT	0	↑	1	-	0	0	0	1	0	0	0	1	Sleep out and charge-pump on
12	PTLON	0	↑	1	-	0	0	0	1	0	0	1	0	Partial Mode On
13	NORON	0	↑	1	-	0	0	0	1	0	0	1	1	Normal Display Mode On
20	INVOFF	0	↑	1	-	0	0	1	0	0	0	0	0	Display Inversion Off
21	INVON	0	↑	1	-	0	0	1	0	0	0	0	1	Display Inversion On
26	GAMSET	0	↑	1	-	0	0	1	0	0	1	1	0	Gamma Set
		1	↑	1	-	GC[7:0]								
28	DISPOFF	0	↑	1	-	0	0	1	0	1	0	0	0	Display off
29	DISPON	0	↑	1	-	0	0	1	0	1	0	0	1	Display on
2A	CASET	0	↑	1	-	0	0	1	0	1	0	1	0	Read Display Status
		1	↑	1	-	SC[15:8]								
		1	↑	1	-	SC[7:0]								
		1	↑	1	-	EC[15:8]								
		1	↑	1	-	EC[7:0]								
2B	PASET	0	↑	1	-	0	0	1	0	1	0	1	1	Row address set
		1	↑	1	-	SP[15:8]								
		1	↑	1	-	SP[7:0]								
		1	↑	1	-	EP[15:8]								
		1	↑	1	-	EP[7:0]								
2C	RAMWR	0	↑	1	-	0	0	1	0	1	1	0	0	Memory write
		1	↑	1	-	D[15:0]								
2D	Colour set	0	↑	1	-	0	0	1	0	1	1	0	0	Colour set
		1	↑	1	-	X	X	R005	R004	R003	R002	R001	R000	Total 128 parameters
		1	↑	1	-	X	X	Rnn5	Rnn4	Rnn3	Rnn2	Rnn1	Rnn0	
		1	↑	1	-	X	X	R315	R314	R313	R312	R311	R310	
		1	↑	1	-	X	X	G005	G004	G003	G002	G001	G000	
		1	↑	1	-	X	X	Gnn5	Gnn4	Gnn3	Gnn2	Gnn1	Gnn0	
		1	↑	1	-	X	X	G635	G634	G633	G632	G631	G630	
		1	↑	1	-	X	X	B005	B004	B003	B002	B001	B000	
		1	↑	1	-	X	X	B315	B314	B313	B312	B311	B310	
2E	RAMRD	0	↑	1	-	0	0	1	0	1	1	1	0	Memory read
		1	↑	-	-	-	-	-	-	-	-	-	-	Dummy read
		1	↑	-	-	D[15:0]								
30	PLTAR	0	↑	1	-	0	0	1	1	0	0	0	0	Partial start end address set
		1	↑	1	-	SR[15:8]								
		1	↑	1	-	SR[7:0]								
		1	↑	1	-	ER[15:8]								
		1	↑	1	-	ER[7:0]								
33	VSCRDEF	0	↑	1	-	0	0	1	1	0	0	1	1	Vertical Scrolling Definition
		1	↑	1	-	TFA1 5	TFA1 4	TFA1 3	TFA1 2	TFA11	TFA1 0	TFA9	TFA8	
		1	↑	1	-	TFA7	TFA6	TFA5	TFA4	TFA3	TFA2	TFA1	TFA0	
		1	↑	1	-	VSA1 5	VSA1 4	VSA1 3	VSA1 2	VSA1 1	VSA1 0	VSA9	VSA8	

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

		1	↑	1	-	VSA7	VSA6	VSA5	VSA4	VSA3	VSA2	VSA1	VSA0	
34	TEOFF	1	↑	1	-	BFA1 5	BFA1 4	BFA1 3	BFA1 2	BFA11	BFA1 0	BFA9	BFA8	
		1	↑	1	-	BFA7	BFA6	BFA5	BFA4	BFA3	BFA2	BFA1	BFA0	
		0	↑	1		0	0	1	1	0	1	0	0	Tear Effect On/Off
35	TEON	0	↑	1		0	0	1	1	0	1	0	1	Tear Effect Mode
		1	↑	1		0	0	0	0	0	0	0	M(0)	
36	MADCTL	0	↑	1	-	0	0	1	1	0	1	1	0	Memory Access Control
		0	↑	1	-	MY (0)	MX (0)	MV (0)	ML (0)	BGR (0)	SS (0)	0	0	
37	VSCRSADD	0	↑	1	-	0	0	1	1	0	1	1	1	Vertical Scrolling Start Address
		1	↑	1	-	VSP15	VSP14	VSP13	VSP12	VSP11	VSP10	VSP9	VSP8	
		1	↑	1	-	VSP7	VSP6	VSP5	VSP4	VSP3	VSP2	VSP1	VSP0	
38	IDMOFF	0	↑	1	-	0	0	1	1	1	0	0	0	Idle Mode off
39	IDMON	0	↑	1	-	0	0	1	1	1	0	0	1	Idle Mode on
3A	COLMOD	0	↑	1	-	0	0	1	1	1	0	1	0	Interface Pixel Format
		1	↑	1	-	-	CSEL_RGB[2:0]	-	-	CSEL[2:0]	-	-	-	
DA	RDID1	0	↑	1	-	1	1	0	1	1	0	1	0	Read ID1
		0	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	module's manufacturer[7:0]								
DB	RDID2	0	↑	1	-	1	1	0	1	1	0	1	1	Read ID2
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑	-	1	V6	V5	V4	V3	V2	V1	V0	
DC	RDID3	0	↑	1	-	1	1	0	1	1	1	0	0	Read ID3
		1	1	↑	-	-	-	-	-	-	-	-	-	Dummy read
		1	1	↑		LCD module/driver ID[7:0]								

6.2 User Define Command List Table

User define command list is available only under “EXTC=1” or enable PASSWDEN command (even EXTC = low), if EXTC=0 (No enable PASSWDEN command)all user define write command is seen as “NOP”, of Hi-Z data bus if any user defined read command.

6.2.1 Command List

Table 6. 2 User Command Set

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function			
B0	SETOSC	0	↑	1	-	1	0	1	1	0	0	0	0	Set Internal Oscillator			
		1	↑	1	-	CADJ[3:0](1000)			UADJ[2:0](001)			-					
		1	↑	1	-	-	-	-	-	-	-	RADJ[1:0](01)					
		1	↑	1	-	-	-	-	OSC_EN_C ON(0)	-	-	OSC_E N(0)	-				
B1	SETPOWER	0	↑	1	-	1	0	1	1	0	0	0	1	Set power			
		1	↑	1	-	GASE_NB (0)	-	-	PON (0)	DK (1)	-	-	STB(0)				
		1	↑	1	-	-	-	-	-	-	AP[2:0] (000)						
		1	↑	1	-	-	-	-	-	-	VC1[2:0] (011)						
		1	↑	1	-	-	-	-	-	-	VRH[3:0](0100)						
		1	↑	1	-	BT[3:0] (0011)			-	-	-	-	-				
		1	↑	1	-	-	-	FS1[1:0] (01)	-	-	FS0[1:0] (00)						
		1	↑	1	-	N_DC[7:0] (0100_1010)											
		1	↑	1	-	E_DC[7:0](0100_1010)											
B2	SETDISP	1	↑	1	-	-	-	-	-	-	-	-	DCCLK_SYNC (1)				
		0	↑	1	-	1	0	1	1	0	0	1	0	Set display related register			
		1	↑	1	-	PT[1:0] (00)		GON (1)	DTE (0)	D[1:0] (00)		-	-				
		1	↑	1	-	-	-	-	-	N_BP[3:0] (1101)							
		1	↑	1	-	-	-	-	-	N_FP[3:0] (1010)							
		1	↑	1	-	SAP[7:0]											
		1	↑	1	-	EQS[7:0]											
		1	↑	1	-	EQP[7:0]											
		1	↑	1	-	-	-	-	-	GEN_OFF[3:0]							
		1	↑	1	-	-	-	PTG[1:0] (10)	-	ISC[3:0] (0010)							
B3	SETLUT	1	↑	1	-	SAP_I[7:0]											
		0	↑	1	-	1	0	1	1	0	0	1	1	(P/H default)			
B4	SETCYC	1	↑	1	-	-	-	LUT_E NB(0)	-	-	-	-	-	OPTION_DISP(0)			
		0	↑	1	-	1	0	1	1	0	1	0	0	Set Display cycles			
		1	↑	1	-	N_RTN[3:0] (1101)			-	N_NW[2:0] (001)							
		1	↑	1	-	E_RTN[3:0] (1101)			-	E_NW[2:0] (000)							
		1	↑	1	-	-	-	DIV_E[1:0] (00)	-	-	-	-	-				
		1	↑	1	-	SON[7:0] (0001_1001)											
		1	↑	1	-	GDON[7:0] (0001_1110)											
B5	SETBGP	1	↑	1	-	GDOF[7:0] (0111_1000)											
		0	↑	1	-	1	0	1	1	0	1	0	1	Set BGP Voltage			
B6	SETVCOM	1	↑	1	-	-	-	-	-	BGP[3:0] (1000)							
		0	↑	1	-	1	0	1	1	0	1	1	0	Set VCOM Voltage			
		1	↑	1	-	VCO MG (0)	-	-	-	-	-	-	-				
		1	↑	1	-	-	VCMN [6:0] (100_0100)										
		1	↑	1	-	-	-	-	-	VDV[4:0] (0_1101)							

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
B7	SETGAMMA	0	↑	1	-	1	0	1	1	0	1	1	1	Set Gamma
		1	↑	1	-	--	MP1[2:0](101)		--	MP0[2:0](000)				
		1	↑	1	-	--	MP3[2:0](101)		--	MP2[2:0](101)				
		1	↑	1	-	--	MP5[2:0](000)		--	MP4[2:0](101)				
		1	↑	1	-	--	--	--	--	CP0[3:0](0010)				
		1	↑	1	-	CP2[3:0](1001)				CP1[3:0](1111)				
		1	↑	1	-	--	--	--	--	CP3[3:0](0101)				
		1	↑	1	-	--	--	--	--	CP4[3:0](0010)				
		1	↑	1	-	--	--	--	--	OP0[3:0](0010)				
		1	↑	1	-	--	--	--	--	OP1[4:0](0_0110)				
		1	↑	1	-	--	--	--	--	CGM1[1:0](10)	CGM0[1:0](10)			
		1	↑	1	-	--	MN1[2:0](111)		--	MN0[2:0](101)				
		1	↑	1	-	--	MN3[2:0](001)		--	MN2[2:0](000)				
		1	↑	1	-	--	MN5[2:0](100)		--	MN4[2:0](000)				
		1	↑	1	-	--	--	--	--	CN0[3:0](0011)				
		1	↑	1	-	CN2[3:0](1000)				CN1[3:0](0011)				
		1	↑	1	-	--	--	--	--	CN3[3:0](1111)				
		1	↑	1	-	--	--	--	--	CN4[3:0](0000)				
		1	↑	1	-	--	--	--	--	ON0[3:0](0001)				
		1	↑	1	-	--	--	--	--	ON1[4:0](1_0111)				
B9	PASSWDEN	0	↑	1	-	1	0	1	1	1	0	0	1	Pass word enable command
BA	PASSWDDIS AB	1	↑	1	-	0	0	0	0	0	1	0	0	17H == >04H
		1	↑	1	-	0	0	0	1	0	1	1	1	cch == >17H
		0	↑	1	-	1	0	1	1	1	0	1	0	Pass word disable command

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function	
BB	SETOTP	0	↑	1	-	1	0	1	1	1	0	1	1	Set OTP	
		1	↑	1	-		OTP_MASK[7:0] (0000_0000)								
		1	↑	1	-		OTP_INDEX[7:0] (1111_1111)								
		1	↑	1	-	OTP_L OAD DISAB LE (0)	DCCLK DISABL E (0)	OTP_P POR (0)	OTP_P WE (0)	OTP_E N (0)	OPTTEST _EN(0)	VPP_SE L(0)	OTP_PRO G(0)		
		1	↑	1	-	-	-	-	-	OTP_PTM[1:0](0 0)		OTP_VRADJ[1:0](00)			
BC	SETVDC	0	↑	1	-	1	0	1	1	1	1	0	0	Set internal digital and GRAM voltage	
		1	↑	1	-	-	-	-	-	-	-	VDC_SEL[2:0] (010)			
BD	SETSPULSE	0	↑	1	-	1	0	1	1	1	1	0	1	Set SRAM Arbiter pulse	
		1	↑	1	-		RTBA[13:8](000000)								
BE	SETPROBE	0	↑	1	-	1	0	1	1	1	1	1	0		
		1	↑	1	-		RTBA[7:0](1101_1011)								
		1	↑	1	-	-	-	-	-	-	-	TEST_MODE(0)	TEST_OE(0)		
BF	SETPTBA	0	↑	1	-	1	0	1	1	1	1	1	1		
		1	↑	1	-	-	-	-	-	-	-	PTBA[15:8] (00100100)			
		1	↑	1	-		PTBA[7:0] (00000100)								
C0	SETSTBA	0	↑	1	-	1	1	0	0	0	0	0	0		
		0	↑	1	-								STBA[8](1)		
		1	↑	1	-		STBA[7:0] (1000_1011)								
C1	SETPFUSE	0	↑	1	-	1	1	0	0	0	0	0	1		
		1	↑	1	-	-	-	-	-	-	-	-	PFUSE(0)		
C4	SETID	0	↑	1	-	1	1	0	0	0	0	1	0		
		1	↑	1	-		ID1[7:0] (0100_0111)								
		1	↑	1	-	-		ID2[6:0] (000_0001)							
C6	SETECO	0	↑	1	-	1	1	0	0	0	1	1	0		
							ECO0[7:0] (0000_0000)								
		1	↑	1	-		ECO1[7:0] (0000_0000)								

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
CA	SETMREV	0	↑	1	-	1	1	0	0	1	0	1	0	
		1	↑	1	-	-	-	-	-	-	-	SFULL(0)	-	For Free Running Mode
CB	SETIOOPT	0	↑	1	-	1	1	0	0	1	0	1	1	
		1	↑	1	-	IO_OPT[7:0] (0101_0101)								
		1	↑	1	-	IO_OPT2[7:0] (0000_0000)								
CC	SETPANEL	0	↑	1	-	1	1	0	0	1	1	0	0	
		1	↑	1	-				SM_PA NEL(0)	SS_PA NEL(0)	-	-	-	Set Panel characteristics

Himax Confidential
DO NOT Copy
For Tianma Only

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
E0	GETOSC	0	↑	1	-	1	1	1	0	0	0	0	0	Get Internal Oscillator
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-			CADJ[3:0] (1000)		UADJ[2:0] (011)			-	
		1	1	↑	-						-			RADJ[2:0]
		1	1	↑	-	-	-	-	OSC_E_N_CON (1)	-	-	OSC_E_N(0)	-	
E1	GETPOWER	0	↑	1	-	1	1	1	0	0	0	0	1	Get power
		1	1	↑										Dummy Read or Dummy Clock
		1	1	↑	-	GASE_B(0)	-	-	PON(0)	DK(1)	--	--	STB(0)	
		1	1	↑	-	-	-	-	-	-			AP[2:0] (000)	
		1	1	↑	-	-	-	-	-	-			VC1[2:0] (011)	
		1	1	↑	-	-	-	-	-	-			VRH[3:0] (0010)	
		1	1	↑	-			BT[3:0] (0011)		-	-	-	-	
		1	1	↑	-	-	-	FS1[1:0]	-	-			FS01[1:0] (00)	
		1	1	↑	-									N_DC[7:0] (0011_0111)
		1	1	↑	-									E_DC[7:0] (0011_0111)
E2	GETDISP	0	↑	1	-	1	1	1	0	0	0	1	0	Get display related register
		1	1	↑										Dummy Read or Dummy Clock
		1	1	↑	-	PT[1:0](00)	GON(1)	DTE(0)	D[1:0](00)	0	0	0	0	
		1	1	↑	-	-	-	-	-					N_BP[3:0](1101)
		1	1	↑	-	-	-	-	-					N_FP[3:0] (1010)
		1	1	↑	-	-	-	-	-					SAP [7:0]
		1	1	↑	-	-	-	-	-					EQS[7:0]
		1	1	↑	-	-	-	-	-					EQP[7:0]
		1	1	↑	-	-	-	-	-					GEN_OFF[3:0]
		1	1	↑	-			PTG[1:0](10)						ISC[3:0] (0010)
		1	1	↑										SAP_I[7:0]
		1	1	↑	-	-		PTG[1:0]						ISC[3:0]
		1	1	↑	-									OPTION_DISP(0)
E3	GETLUT	0	↑	1	-	1	1	1	0	0	0	1	1	Get LUT interface related register
		1	1	↑										Dummy Read or Dummy Clock
		1	1	↑	-	-	-	LUT_E_N(0)	-	-	-	-	-	
E4	GETCYC	0	↑	1	-	1	1	1	0	0	1	0	0	Get Display waveform cycle
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-			N_RTN[3:0](1101)	-					N_NW[2:0] (001)
		1	1	↑	-			E_RTN[3:0] (1101)	-					E_NW[2:0] (000)
		1	1	↑	-	-	-	DIV_E[1:0]						
		1	1	↑	-	-	-							SON[7:0](0001_1001)
		1	1	↑	-	-	-							GDON[7:0] (0001_1110)
		1	1	↑	-	-	-							GDOF[7:0] (0111_1000)

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
E5	GETBGP	0	↑	1	-	1	1	1	0	0	1	0	1	Get BGP Voltage
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-	-	-	-	-					BGP[3:0](1000)
E6	GETVCOM	0	↑	1	-	1	1	1	0	0	1	1	0	Get VCOM Voltage
		1	1	↑	-	VCO MG(0)	-	-	-	-	-	-	-	
		1	1	↑	-	-								VCMPN[6:0](101_0101)
E7	GETGAMMA	1	1	↑	-	-	-	-	-					VDV[4:0] (1_0000)
		0	↑	1	-	1	1	1	0	0	1	1	1	Get Gamma
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-	-	MP12	MP11	MP10	--	MP02	MP01	MP00	
		1	1	↑	-	-	MP32	MP31	MP30	--	MP22	MP21	MP20	
		1	1	↑	-	-	MP52	MP51	MP50	--	MP42	MP41	MP40	
		1	1	↑	-	-	--	--	--	CP03	CP02	CP01	CP00	
		1	1	↑	-	CP23	CP22	CP21	CP20	CP13	CP12	CP11	CP10	
		1	1	↑	-	-	--	--	--	CP33	CP32	CP31	CP30	
		1	1	↑	-	-	--	--	--	CP43	CP42	CP41	CP40	
		1	1	↑	-	-	--	--	--	OP03	OP02	OP01	OP00	
		1	1	↑	-	-	--	--	OP14	OP13	OP12	OP11	OP10	
		1	1	↑	-	-	--	--	--	CGM1[1:0]				CGM0[1:0]
		1	1	↑	-	-	MN12	MN11	MN10	--	MN02	MN01	MN00	
		1	1	↑	-	-	MN32	MN31	MN30	--	MN22	MN21	MN20	
		1	1	↑	-	-	MN52	MN51	MN50	--	MN42	MN41	MN40	
		1	1	↑	-	-	--	--	--	CN03	CN02	CN01	CN00	
		1	1	↑	-	CN23	CN22	CN21	CN20	CN13	CN12	CN11	CN10	
		1	1	↑	-	-	--	--	--	CN32	CN31	CN30		
		1	1	↑	-	-	--	--	--	CN43	CN42	CN49	CN40	
		1	1	↑	-	-	--	--	--	ON03	ON02	ON01	ON00	
		1	1	↑	-	-	--	ON14	ON13	ON12	ON11	ON10		
E8	GETCPCRC	0	↑	1	-	1	1	1	0	1	0	0	0	Get CPCRC
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									CPCRC7:0]
EB	GETOTP	0	↑	1	-	1	1	1	0	1	0	1	1	Get OTP
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									OTP_MASK[7:0]
		1	1	↑	-									OTP_INDEX[7:0]
		1	1	↑	-	OTP_L_OAD_DISABLE	DCCLK_DISABLE	OTP_POR	OTP_PWE	OTP_EN	OTPEST_ENB	VPP_SEL	OTP_PROG	
		1	1	↑	-	-	--	--	--	OTP_PTM[1:0](00)				OTP_VRADJ[1:0](00)
		1	1	↑	-									OTP_DATA[7:0]
EC	GETVDC	0	↑	1	-	1	1	1	0	1	1	0	0	Get internal digital and GRAM voltage
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-	-	-	-	-	-	-			VDC_SEL[2:0]
ED	GETSPULSE	0	↑	1	-	1	1	1	0	1	1	0	1	Get SRAM Arbiter pulse
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									RTBA[15:8]
		1	1	↑										RTBA[7:0]
EE	GETPROBE	0	↑	1	-	1	1	1	0	1	1	1	0	
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-	-	-	-	-	-	-			TEST_MODE(0)
		1	1	↑	-									TEST_OE(0)
EF	GETPTBA	0	↑	1	-	1	1	1	0	1	1	1	1	
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									PTBA[15:8](0010_0100)
		1	1	↑	-									PTBA[7:0] (0000_0100)

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

-P.119-

February, 2008

(Hex)	Operation Code	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	Function
F0	GETSTBA	0	↑	1	-	1	1	1	1	0	0	0	0	Get Source option
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									STBA[7:0](1000_1011)
		1	1	↑	-		VTESTSEL[3:0](0000)		STESTOE[1:0](00)					
		1	1	↑	-									
		1	1	↑	-									
F1	GETPFUSE	0	↑	1		1	1	1	1	0	0	0	1	
		1	1	↑		-	-	-	-	-	-	-	PFUSE(0)	Get internal OTP
F4	GETHXID	0	↑	1	-	1	1	1	1	0	1	0	0	Get Himax ID
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									ID_version[7:0](53h)
		1	1	↑	-									ID2_version [7:0](0Ch)
F6	GETECO	1	1	↑	-									VersionID[7:0](00h)
		0	↑	1	-	1	1	1	1	0	1	1	0	
		1	↑	1										Dummy Read or Dummy Clock
		1	↑	1	-									ECO0[7:0](8'b0)
		1	↑	1	-									ECO1[7:0] (8'b0)
FA	GETMREV	1	↑	1	-									
		0	↑	1	-	1	1	1	1	0	1	1	0	
		1	1	↑	-									Dummy Read or Dummy Clock
FB	GETIOOPT	1	1	↑	-									
		0	↑	1	-	1	1	1	1	1	0	1	1	
		1	1	↑	-									Dummy Read or Dummy Clock
		1	1	↑	-									IO_OPT[7:0] (0101_0101)
FC	GETPANEL	1	1	↑	-									IO_OPT2[7:6]=>SDI
		0	↑	1	-	1	1	1	1	1	1	0	0	GET_PANEL
		1	1	↑	-									Dummy Read or Dummy Clock
FE	GETWINDOW	1	1	↑	-					SM_PA NEL	SS_PA NEL	-	-	-
		0	↑	1	-	1	1	1	1	1	1	1	0	
		1	1	↑	-									Dummy Read or Dummy Clock
		1	↑	1	-									SC[7:0]
		1	↑	1	-									EC[7:0]
		1	↑	1	-									SP[7:0]
		1	↑	1	-									EP[7:0]
		1	↑	1	-									PSL[7:0]
		1	↑	1	-									PEL[7:0]
		1	↑	1	-									TFA[7:0]
		1	↑	1	-									VSA[7:0]
FF	GETTS	1	↑	1	-									BFA[7:0]
		0	↑	1	-	1	1	1	1	1	1	1	1	
		1	1	↑	-									Dummy Read or Dummy Clock
						-								TS[6:0]
														It is for internal use, not open.

Note: (1) Undefined commands are treated as NOP (00H) command.

(2) B0 to D9 and DE to FF are for factory use of display module supplier. User can decide if these commands are available or they are treated as NOP (00H) commands before shipped to User. Default value is NOP(00H). If pin EXTC is tied to high, B0 to D9 and DE to FF extended command sets are accepted, other extended command sets are discarded.

(3) Commands 10H, 12H, 13H, 20H, 21H, 26H, 28H, 29H, 30H, 36H (Bit B4 only), 38H and 39H are updated during V-sync when Module is in Sleep Out Mode to avoid abnormal visual effects. During Sleep In mode, these commands are updated immediately. Read status (09H), Read Display Power Mode (0AH), Read Display MADCTL (0BH), Read Display Pixel Format (0CH), Read Display Image Mode (0DH), Read Display Signal Mode (0EH) and Read Display Self Diagnostic Result (0FH) of these commands is updated immediately both in Sleep In Mode and Sleep Out Mode.


(4) SETGAMMA and GETGAMMA can't be set at the same time.

6.3 Command Description

6.3.1 NOP

00 H	NOP (No Operation)										
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0
Command	0	↑	1	0	0	0	0	0	0	0	00
Parameter	NO PARAMETER										
	This command is an empty command; it does not have any effect on the display module.										
Description	However it can be used to terminate Frame Memory Write or Read as described in RAMWR (Memory Write) and RAMRD (Memory Read) Commands.										
Restriction											
Register Availability	Status		Availability								
	Normal Mode On, Idle Mode Off, Sleep Out		Yes								
	Normal Mode On, Idle Mode On, Sleep Out		Yes								
	Partial Mode On, Idle Mode Off, Sleep Out		Yes								
	Partial Mode On, Idle Mode On, Sleep Out		Yes								
	Sleep In or Booster Off		Yes								
Default	Status		Default Value								
	Power On Sequence		N/A								
	S/W Reset		N/A								
	H/W Reset		N/A								
Flow Chart											

6.3.2 Software Reset (01h)

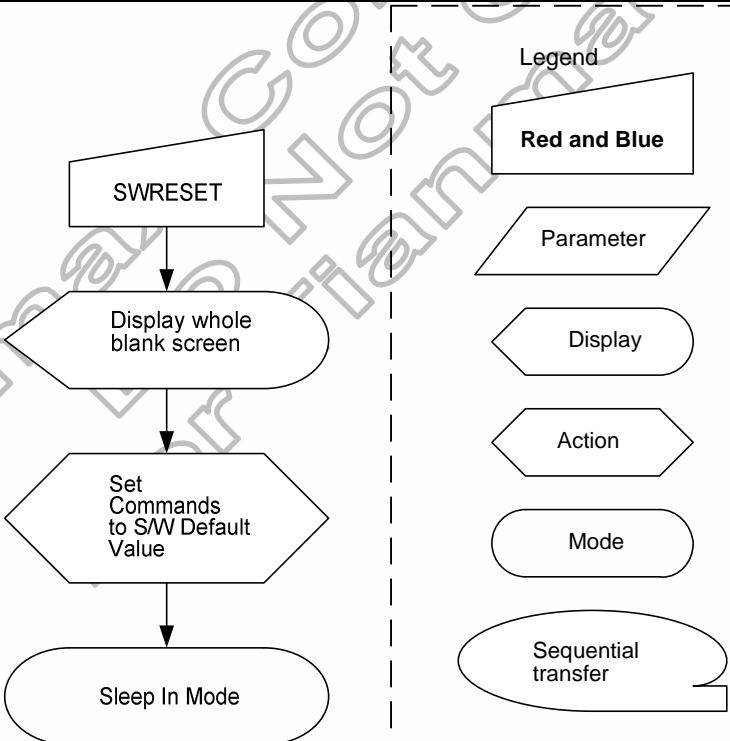01 H	SWRESET (Software Reset)																							
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	0	0	0	0	0	0	0	1	01												
Parameter	NO PARAMETER																							
Description	When the Software Reset command is written, it causes a software reset. It resets the commands and parameters to their S/W Reset default values. (See default tables in each command description.) Note: The Frame Memory contents are unaffected by this command																							
	It will be necessary to wait 5msec before sending new command following software reset.																							
Restriction	The display module loads all display supplier's factory default values to the registers during this 5msec. If Software Reset is applied during Sleep Out mode, it will be necessary to wait 120msec before sending Sleep out command. Software Reset Command cannot be sent during Sleep Out sequence.																							
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes
Status	Availability																							
Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
Normal Mode On, Idle Mode On, Sleep Out	Yes																							
Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In or Booster Off	Yes																							
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>N/A</td> </tr> <tr> <td>S/W Reset</td> <td>N/A</td> </tr> <tr> <td>H/W Reset</td> <td>N/A</td> </tr> </tbody> </table>												Status	Default Value	Power On Sequence	N/A	S/W Reset	N/A	H/W Reset	N/A				
Status	Default Value																							
Power On Sequence	N/A																							
S/W Reset	N/A																							
H/W Reset	N/A																							
Flow Chart	 <pre> graph TD SWRESET[SWRESET] --> Blank[Display whole blank screen] Blank --> Set[Set Commands to S/W Default Value] Set --> SleepIn[Sleep In Mode] </pre> <p>Legend:</p> <ul style="list-style-type: none"> Red and Blue: Box Parameter: Parallelogram Display: Diamond Action: Hexagon Mode: Oval Sequential transfer: Ellipse 																							

6.3.3 Read Display Identification Information (04h)

04 H		RDDIDIF (Read Display Identification Information)																																
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																						
Command	0	↑	1	0	0	0	0	0	1	0	0	04																						
1st parameter	1	1	↑	ID17	ID16	ID15	ID14	ID13	ID12	ID11	ID10	-																						
2 nd parameter	1	1	↑	ID27	ID26	ID25	ID24	ID23	ID22	ID21	ID20	-																						
3 rd parameter	1	1	↑	ID37	ID36	ID35	ID34	ID33	ID32	ID31	ID30	-																						
Description	<p>This read byte returns 24-bit display identification information. The 1st Parameter is dummy read. The 2nd Parameter identifies the LCD module's manufacturer. It is specified by Nokia and for xx is defined as xxHEX. The 3rd Parameter has 2 purposes. Bit7 (MSB) defines the type of panel. 0=Driver (STN B/W), 1=Module (Color). Bits 6...0 are used to track the LCD module/driver version. It is defined by display supplier (with Nokia's agreement) and it changes each time a revision is made to the display, material or construction specifications. See Table:</p> <table border="1"> <thead> <tr> <th>ID Byte Value V[7:0]</th> <th>Version</th> <th>Changes</th> </tr> </thead> <tbody> <tr><td>80h</td><td></td><td></td></tr> <tr><td>81h</td><td></td><td></td></tr> <tr><td>82h</td><td></td><td></td></tr> <tr><td>83h</td><td></td><td></td></tr> <tr><td>84h</td><td></td><td></td></tr> <tr><td>85h</td><td></td><td></td></tr> </tbody> </table> <p>The 4th parameter identifies the LCD module/driver. It is specified by Nokia and for this LCD project module is defined as xxHEX.</p>													ID Byte Value V[7:0]	Version	Changes	80h			81h			82h			83h			84h			85h		
ID Byte Value V[7:0]	Version	Changes																																
80h																																		
81h																																		
82h																																		
83h																																		
84h																																		
85h																																		
Restriction																																		
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> </tbody> </table>		Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes																						
Status	Availability																																	
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																	
Normal Mode On, Idle Mode On, Sleep Out	Yes																																	
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																	
Partial Mode On, Idle Mode On, Sleep Out	Yes																																	
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr><td>Power On Sequence</td><td>See Description</td></tr> <tr><td>S/W Reset</td><td>See Description</td></tr> </tbody> </table>		Status	Default Value	Power On Sequence	See Description	S/W Reset	See Description																										
Status	Default Value																																	
Power On Sequence	See Description																																	
S/W Reset	See Description																																	
Flow Chart	<pre> graph TD subgraph "Serial I/F Mode" S0[RDDID (04h)] --> S1[Dummy Clock] S1 --> S2[Send ID1[7:0]] S2 --> S3[Send ID2[7:0]] S3 --> S4[Send ID3[7:0]] end subgraph "Parallel I/F Mode" P0[RDDID (09h)] --> P1[Dummy Read] P1 --> P2[Send ID1[7:0]] P2 --> P3[Send ID2[7:0]] P3 --> P4[Send ID3[7:0]] end </pre>																																	

6.3.4 Read Display Status (09h)


09 H		RDDST (Read Display Status)																																																																																																												
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																																																	
Command		0	↑	1	0	0	0	0	1	0	0	1	09																																																																																																	
1 st parameter	1	1	↑	-	-	-	-	-	-	-	-	-	-																																																																																																	
2 nd parameter	1	1	↑	D31	D30	D29	D28	D27	D26	D25	D24	D24	-																																																																																																	
3 rd parameter	1	1	↑	D23	D22	D21	D20	D19	D18	D17	D16	D16	-																																																																																																	
4 th parameter	1	1	↑	D15	D14	D13	D12	D11	D10	D9	D8	D8	-																																																																																																	
5 th parameter	1	1	↑	D7	D6	D5	D4	D3	D2	D1	D0	D0	-																																																																																																	
Description	This command indicates the current status of the display as described in the table below: <table border="1"> <thead> <tr> <th>Bit</th><th>Description</th><th>Comment</th></tr> </thead> <tbody> <tr> <td>D31</td><td>Booster Voltage Status</td><td></td></tr> <tr> <td>D30</td><td>Page Address Order</td><td></td></tr> <tr> <td>D29</td><td>Column Address Order</td><td></td></tr> <tr> <td>D28</td><td>Page/Column Order</td><td></td></tr> <tr> <td>D27</td><td>Vertical Order</td><td></td></tr> <tr> <td>D26</td><td>RGB/BGR Order</td><td></td></tr> <tr> <td>D25</td><td>Horizontal Order</td><td></td></tr> <tr> <td>D24</td><td>Switching between Segment outputs and RAM</td><td>Set to '0'</td></tr> <tr> <td>D23</td><td>Switching between Common outputs and RAM</td><td>Set to '0'</td></tr> <tr> <td>D22</td><td rowspan="3">Interface Color Pixel Format Definition</td><td>Set to '1'</td></tr> <tr> <td>D21</td><td>Set to '1'</td></tr> <tr> <td>D20</td><td>Set to '0'</td></tr> <tr> <td>D19</td><td>Idle Mode On/Off</td><td></td></tr> <tr> <td>D18</td><td>Partial Mode On/Off</td><td></td></tr> <tr> <td>D17</td><td>Sleep In/Out</td><td></td></tr> <tr> <td>D16</td><td>Display Normal Mode On/Off</td><td></td></tr> <tr> <td>D15</td><td>Vertical Scrolling Status</td><td></td></tr> <tr> <td>D14</td><td>Horizontal Scrolling Status</td><td>Set to '0'</td></tr> <tr> <td>D13</td><td>Inversion Status</td><td></td></tr> <tr> <td>D12</td><td>All Pixels On</td><td>Set to '0'</td></tr> <tr> <td>D11</td><td>All Pixels Off</td><td>Set to '0'</td></tr> <tr> <td>D10</td><td>Display On/Off</td><td></td></tr> <tr> <td>D9</td><td>Tearing Effect Line On/Off</td><td></td></tr> <tr> <td>D8</td><td></td><td></td></tr> <tr> <td>D7</td><td>Gamma Curve Selection</td><td></td></tr> <tr> <td>D6</td><td></td><td></td></tr> <tr> <td>D5</td><td>Tearing Effect Output Line Mode</td><td></td></tr> <tr> <td>D4</td><td>For Future Use</td><td>Set to '0'</td></tr> <tr> <td>D3</td><td>For Future Use</td><td>Set to '0'</td></tr> <tr> <td>D2</td><td>For Future Use</td><td>Set to '0'</td></tr> <tr> <td>D1</td><td>For Future Use</td><td>Set to '0'</td></tr> <tr> <td>D0</td><td>For Future Use</td><td>Set to '0'</td></tr> </tbody> </table>													Bit	Description	Comment	D31	Booster Voltage Status		D30	Page Address Order		D29	Column Address Order		D28	Page/Column Order		D27	Vertical Order		D26	RGB/BGR Order		D25	Horizontal Order		D24	Switching between Segment outputs and RAM	Set to '0'	D23	Switching between Common outputs and RAM	Set to '0'	D22	Interface Color Pixel Format Definition	Set to '1'	D21	Set to '1'	D20	Set to '0'	D19	Idle Mode On/Off		D18	Partial Mode On/Off		D17	Sleep In/Out		D16	Display Normal Mode On/Off		D15	Vertical Scrolling Status		D14	Horizontal Scrolling Status	Set to '0'	D13	Inversion Status		D12	All Pixels On	Set to '0'	D11	All Pixels Off	Set to '0'	D10	Display On/Off		D9	Tearing Effect Line On/Off		D8			D7	Gamma Curve Selection		D6			D5	Tearing Effect Output Line Mode		D4	For Future Use	Set to '0'	D3	For Future Use	Set to '0'	D2	For Future Use	Set to '0'	D1	For Future Use	Set to '0'	D0	For Future Use	Set to '0'
Bit	Description	Comment																																																																																																												
D31	Booster Voltage Status																																																																																																													
D30	Page Address Order																																																																																																													
D29	Column Address Order																																																																																																													
D28	Page/Column Order																																																																																																													
D27	Vertical Order																																																																																																													
D26	RGB/BGR Order																																																																																																													
D25	Horizontal Order																																																																																																													
D24	Switching between Segment outputs and RAM	Set to '0'																																																																																																												
D23	Switching between Common outputs and RAM	Set to '0'																																																																																																												
D22	Interface Color Pixel Format Definition	Set to '1'																																																																																																												
D21		Set to '1'																																																																																																												
D20		Set to '0'																																																																																																												
D19	Idle Mode On/Off																																																																																																													
D18	Partial Mode On/Off																																																																																																													
D17	Sleep In/Out																																																																																																													
D16	Display Normal Mode On/Off																																																																																																													
D15	Vertical Scrolling Status																																																																																																													
D14	Horizontal Scrolling Status	Set to '0'																																																																																																												
D13	Inversion Status																																																																																																													
D12	All Pixels On	Set to '0'																																																																																																												
D11	All Pixels Off	Set to '0'																																																																																																												
D10	Display On/Off																																																																																																													
D9	Tearing Effect Line On/Off																																																																																																													
D8																																																																																																														
D7	Gamma Curve Selection																																																																																																													
D6																																																																																																														
D5	Tearing Effect Output Line Mode																																																																																																													
D4	For Future Use	Set to '0'																																																																																																												
D3	For Future Use	Set to '0'																																																																																																												
D2	For Future Use	Set to '0'																																																																																																												
D1	For Future Use	Set to '0'																																																																																																												
D0	For Future Use	Set to '0'																																																																																																												
	Bit Values are explained overleaf. Bit D31 – Booster Voltage Status '0' = Booster Off. '1' = Booster On. Bit D30 – Page Address Order '0' = Top to Bottom (When MADCTL B7='0'). '1' = Bottom to Top (When MADCTL B7='1'). Bit D29 – Column Address Order '0' = Left to Right (When MADCTL B6='0'). '1' = Right to Left (When MADCTL B6='1'). Bit D28 - Page/Column Order '0' = Normal Mode (When MADCTL B5='0').																																																																																																													

	Bit D27 – Line Address Order ‘0’ = LCD Refresh Top to Bottom (When MADCTL B4=’0’). ‘1’ = LCD Refresh Bottom to Top (When MADCTL B4=’1’). Bit D26 – RGB/BGR Order ‘0’ = RGB (When MADCTL B3=’0’). ‘1’ = BGR (When MADCTL B3=’1’). Note: For Bits D27, D26, also refer to Section 9.3.23. Bit D25 – Display Data Latch Data Order (if this bit is not available, so it is set to ‘0’) ‘0’ = LCD Refresh Left to Right (When MADCTL B2=’0’). ‘1’ = LCD Refresh Right to Left (When MADCTL B2=’1’). Bit D24 – Switching Between Segment Outputs and RAM This bit is not applicable for this project, so it is set to ‘0’ Bit D23 – Switching Between Common Outputs and RAM ‘This bit is not applicable for this project, so it is set to ‘0’ Bits D22, D21, D20 – Interface Color Pixel Format Definition Bit D19 – Idle Mode On/Off ‘0’ = Idle Mode Off. ‘1’ = Idle Mode On. Bit D18 – Partial Mode On/Off ‘0’ = Partial Mode Off. ‘1’ = Partial Mode On. Bit D17 – Sleep In/Out ‘0’ = Sleep In Mode. ‘1’ = Sleep Out Mode. Bit D16 – Display Normal Mode On/Off ‘0’ = Display Normal Mode Off. ‘1’ = Display Normal Mode On. Bit D15 – Vertical Scrolling On/Off ‘0’ = Vertical Scrolling is Off. ‘1’ = Vertical Scrolling is On. Bit D14 – Horizontal Scrolling Status This bit is not applicable for this project, so it is set to ‘0’ Bit D13 – Inversion On/Off ‘0’ = Inversion is Off. ‘1’ = Inversion is On. Bit D12 – All Pixels On This bit is not applicable for this project, so it is set to ‘0’ Bit D11 – All Pixels Off This bit is not applicable for this project, so it is set to ‘0’ Bit D10 – Display On/Off ‘0’ = Display is Off. ‘1’ = Display is On. Bit D9 – Tearing Effect Line On/Off ‘0’ = Tearing Effect Line Off. ‘1’ = Tearing Effect On. Bits D8, D7, D6 – Gamma Curve Selection																																																
	<table border="1"> <thead> <tr> <th>Gamma Curve Selected</th><th>B8</th><th>B7</th><th>B6</th><th>Gamma Set (26h) Parameter</th></tr> </thead> <tbody> <tr> <td>Gamma Curve 1</td><td>0</td><td>0</td><td>0</td><td>GC0</td></tr> <tr> <td>Gamma Curve 2</td><td>0</td><td>0</td><td>1</td><td>GC1</td></tr> <tr> <td>Gamma Curve 3</td><td>0</td><td>1</td><td>0</td><td>GC2</td></tr> <tr> <td>Gamma Curve 4</td><td>0</td><td>1</td><td>1</td><td>GC3</td></tr> <tr> <td>Not Defined</td><td>1</td><td>0</td><td>0</td><td>Not Defined</td></tr> <tr> <td>Not Defined</td><td>1</td><td>0</td><td>1</td><td>Not Defined</td></tr> <tr> <td>Not Defined</td><td>1</td><td>1</td><td>0</td><td>Not Defined</td></tr> <tr> <td>Not Defined</td><td>1</td><td>1</td><td>1</td><td>Not Defined</td></tr> </tbody> </table>				Gamma Curve Selected	B8	B7	B6	Gamma Set (26h) Parameter	Gamma Curve 1	0	0	0	GC0	Gamma Curve 2	0	0	1	GC1	Gamma Curve 3	0	1	0	GC2	Gamma Curve 4	0	1	1	GC3	Not Defined	1	0	0	Not Defined	Not Defined	1	0	1	Not Defined	Not Defined	1	1	0	Not Defined	Not Defined	1	1	1	Not Defined
Gamma Curve Selected	B8	B7	B6	Gamma Set (26h) Parameter																																													
Gamma Curve 1	0	0	0	GC0																																													
Gamma Curve 2	0	0	1	GC1																																													
Gamma Curve 3	0	1	0	GC2																																													
Gamma Curve 4	0	1	1	GC3																																													
Not Defined	1	0	0	Not Defined																																													
Not Defined	1	0	1	Not Defined																																													
Not Defined	1	1	0	Not Defined																																													
Not Defined	1	1	1	Not Defined																																													
	Bit D5 – Tearing Effect Line Output Mode. ‘0’ = Mode 1, V-Blanking only. ‘1’ = Mode 2, both H-Blanking and V-Blanking.																																																
Restriction																																																	

Register Availability	Status	Availability	
	Normal Mode On, Idle Mode Off, Sleep Out	Yes	
	Normal Mode On, Idle Mode On, Sleep Out	Yes	
	Partial Mode On, Idle Mode Off, Sleep Out	Yes	
	Partial Mode On, Idle Mode On, Sleep Out	Yes	
Default	Status	Default Value	
	Power On Sequence	See Description	
	S/W Reset	See Description	
Flow Chart	<p style="text-align: center;">Serial I/F Mode</p> <pre> graph TD A[RDDST(09h)] --> B[Dummy Clock] B --> C[Send ST[31:24]] C --> D[Send ST[23:16]] D --> E[Send ST[15:8]] E --> F[Send ST[7:0]] </pre> <p style="text-align: center;">Parallel I/F Mode</p> <pre> graph TD A[RDDST(09h)] --> B[Dummy Read] B --> C[Send ST[31:24]] C --> D[Send ST[23:16]] D --> E[Send ST[15:8]] E --> F[Send ST[7:0]] </pre>	<p style="text-align: center;">Host Driver</p> <div style="border: 1px dashed black; padding: 5px; margin-top: 10px;"> <p>Legend</p> <ul style="list-style-type: none"> Red and Blue Parameter Display Action Mode Sequential transfer </div>	


6.3.5 Read Display Power Mode (0Ah)

0A H		RDDPM (Read Display Power Mode)																																						
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																												
Command	0	↑	1	0	0	0	0	1	0	1	0	0A																												
1st parameter	1	1	↑	-	-	-	-	-	-	-	-	-																												
2 nd parameter	1	1	↑	D7	D6	D5	D4	D3	D2	D1	D0	-																												
Description	This command indicates the current status of the display as described in the table below: <table border="1"> <thead> <tr> <th>Bit</th><th>Description</th><th>Comment</th></tr> </thead> <tbody> <tr> <td>D7</td><td>Booster Voltage Status</td><td></td></tr> <tr> <td>D6</td><td>Idle Mode On/Off</td><td></td></tr> <tr> <td>D5</td><td>Partial Mode On/Off</td><td></td></tr> <tr> <td>D4</td><td>Sleep In/Out</td><td></td></tr> <tr> <td>D3</td><td>Display Normal Mode On/Off</td><td></td></tr> <tr> <td>D2</td><td>Display On/Off</td><td></td></tr> <tr> <td>D1</td><td>Not Defined</td><td>Set to '0'</td></tr> <tr> <td>D0</td><td>Not Defined</td><td>Set to '0'</td></tr> </tbody> </table> Bit D7 – Booster Voltage Status '0' = Booster Off or has a fault. '1' = Booster On and working OK (Meets Nokia's optical requirements). Bit D6 - Idle Mode On/Off '0' = Idle Mode Off. '1' = Idle Mode On. Bit D5 – Partial Mode On/Off '0' = Partial Mode Off. '1' = Partial Mode On. Bit D4 – Sleep In/Out '0' = Sleep In Mode. '1' = Sleep Out Mode. Bit D3 – Display Normal Mode On/Off '0' = Display Normal Mode Off. '1' = Display Normal Mode On. Bit D2 – Display On/Off '0' = Display is Off. '1' = Display is On.													Bit	Description	Comment	D7	Booster Voltage Status		D6	Idle Mode On/Off		D5	Partial Mode On/Off		D4	Sleep In/Out		D3	Display Normal Mode On/Off		D2	Display On/Off		D1	Not Defined	Set to '0'	D0	Not Defined	Set to '0'
Bit	Description	Comment																																						
D7	Booster Voltage Status																																							
D6	Idle Mode On/Off																																							
D5	Partial Mode On/Off																																							
D4	Sleep In/Out																																							
D3	Display Normal Mode On/Off																																							
D2	Display On/Off																																							
D1	Not Defined	Set to '0'																																						
D0	Not Defined	Set to '0'																																						
Restrictions																																								
Register Availability	Status	Availability																																						
	Normal Mode On, Idle Mode Off, Sleep Out	Yes																																						
	Normal Mode On, Idle Mode On, Sleep Out	Yes																																						
	Partial Mode On, Idle Mode Off, Sleep Out	Yes																																						
	Partial Mode On, Idle Mode On, Sleep Out	Yes																																						
Default	Sleep In or Booster Off	Yes																																						
	Status	Default Value																																						
	Power On Sequence	08HEX																																						
	S/W Reset	08HEX																																						
	H/W Reset	08HEX																																						

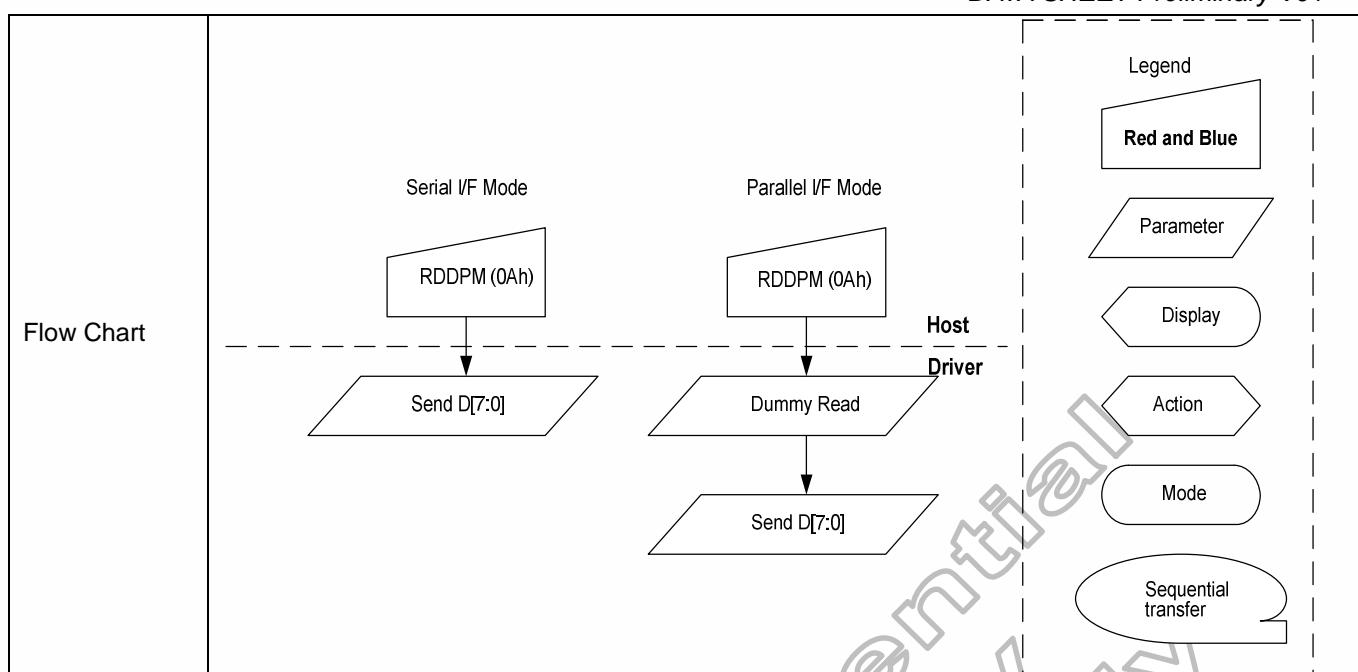

6.3.6 Read Display MADCTL (0Bh)

RDDMADCTL (Read Display MADCTL)																																							
0B H	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																											
Command	0	↑	1	0	0	0	0	1	0	1	1	0B																											
1st parameter	1	1	↑	xx	xx	xx	xx	xx	xx	xx	xx	xx																											
2 nd parameter	1	1	↑	D7	D6	D5	D4	D3	D2	0	0	xx																											
Description	This command indicates the current status of the display as described in the table below: <table border="1"> <thead> <tr> <th>Bit</th><th>Description</th><th>Comment</th></tr> </thead> <tbody> <tr> <td>D7</td><td>Page Address Order</td><td></td></tr> <tr> <td>D6</td><td>Column Address Order</td><td></td></tr> <tr> <td>D5</td><td>Page/Column Order</td><td></td></tr> <tr> <td>D4</td><td>Line Address Order</td><td></td></tr> <tr> <td>D3</td><td>RGB/BGR Order</td><td></td></tr> <tr> <td>D2</td><td>Display Data Latch Order</td><td></td></tr> <tr> <td>D1</td><td>Switching between Segment outputs and RAM</td><td>Set to '0'</td></tr> <tr> <td>D0</td><td>Switching between Common outputs and RAM</td><td>Set to '0'</td></tr> </tbody> </table> Bit D7 – Page Address Order '0' = Top to Bottom (When MADCTL B7='0'). '1' = Bottom to Top (When MADCTL B7='1'). Bit D6 – Column Address Order '0' = Left to Right (When MADCTL B6='0'). '1' = Right to Left (When MADCTL B6='1'). Bit D5 - Page/Column Order '0' = Normal Mode (When MADCTL B5='0'). '1' = Reverse Mode (When MADCTL B5='1'). Note: For Bits D7 to D5, also refer to Section 8.2.3 MCU to memory write/read direction. Bit D4 – Line Address Order '0' = LCD Refresh Top to Bottom (When MADCTL B4='0'). '1' = LCD Refresh Bottom to Top (When MADCTL B4='1'). Bit D3 – RGB/BGR Order '0' = RGB (When MADCTL B3='0'). '1' = BGR (When MADCTL B3='1'). Note: For Bits D4 and D3 also refer to 9.2.29 Memory Access Control (36h). Bit D2 – Display Data Latch Data Order '0' = LCD Refresh Left to Right (When MADCTL B2='0'). '1' = LCD Refresh Right to Left (When MADCTL B2='1'). Bit D1 – Switching Between Segment Outputs and RAM This bit is not applicable for this project, so it is set to '0' Bit D0 – Switching Between Common Outputs and RAM												Bit	Description	Comment	D7	Page Address Order		D6	Column Address Order		D5	Page/Column Order		D4	Line Address Order		D3	RGB/BGR Order		D2	Display Data Latch Order		D1	Switching between Segment outputs and RAM	Set to '0'	D0	Switching between Common outputs and RAM	Set to '0'
Bit	Description	Comment																																					
D7	Page Address Order																																						
D6	Column Address Order																																						
D5	Page/Column Order																																						
D4	Line Address Order																																						
D3	RGB/BGR Order																																						
D2	Display Data Latch Order																																						
D1	Switching between Segment outputs and RAM	Set to '0'																																					
D0	Switching between Common outputs and RAM	Set to '0'																																					
Restrictions																																							
Register Availability	<table border="1"> <thead> <tr> <th>Status</th><th>Availability</th></tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In or Booster Off</td><td>Yes</td></tr> </tbody> </table>		Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes																									
Status	Availability																																						
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																						
Normal Mode On, Idle Mode On, Sleep Out	Yes																																						
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																						
Partial Mode On, Idle Mode On, Sleep Out	Yes																																						
Sleep In or Booster Off	Yes																																						
Default	<table border="1"> <thead> <tr> <th>Status</th><th>Default Value</th></tr> </thead> <tbody> <tr> <td>Power On Sequence</td><td>00HEX</td></tr> <tr> <td>S/W Reset</td><td>No Change</td></tr> <tr> <td>H/W Reset</td><td>00HEX</td></tr> </tbody> </table>		Status	Default Value	Power On Sequence	00HEX	S/W Reset	No Change	H/W Reset	00HEX																													
Status	Default Value																																						
Power On Sequence	00HEX																																						
S/W Reset	No Change																																						
H/W Reset	00HEX																																						

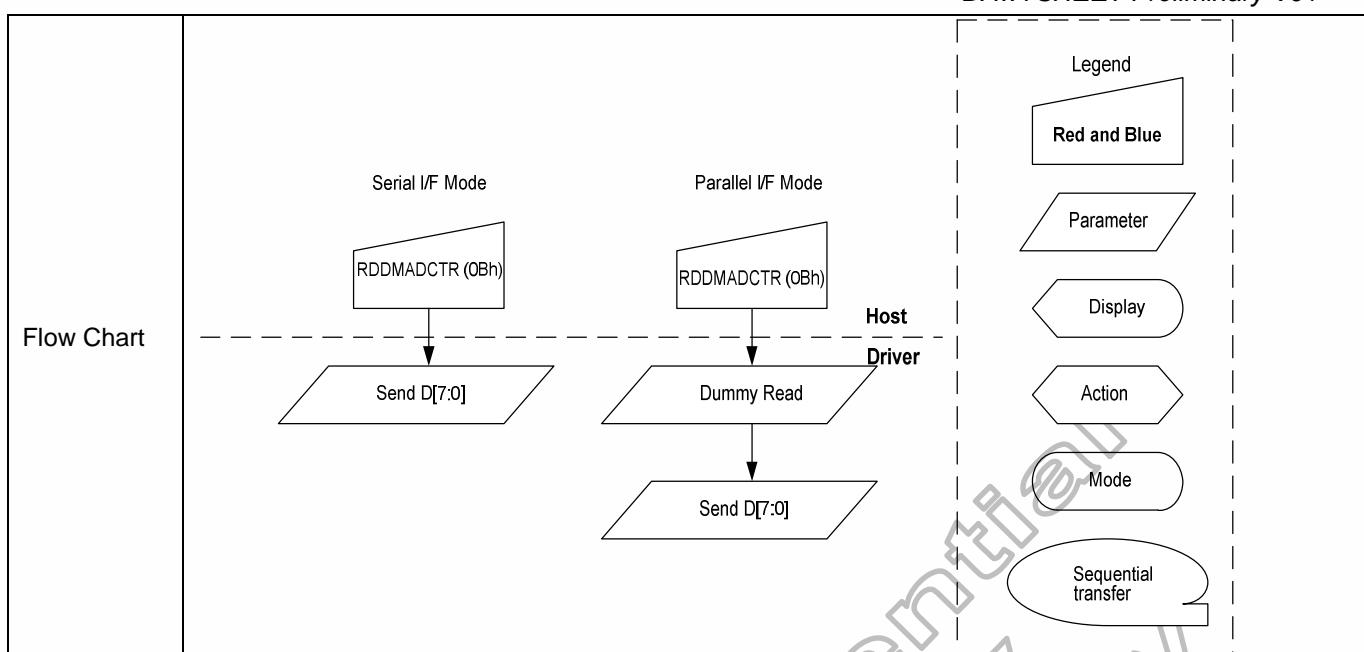


Himax Confidential
For DO Not Copy Only


6.3.7 Read Display Pixel Format (0Ch)

0C H		RDDCOLMOD (Read Display COLMOD)																							
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX													
Command	0	↑	1	0	0	0	0	1	1	0	0	0C													
1st parameter	1	1	↑	-	-	-	-	-	-	-	-	-													
2 nd parameter	1	1	↑	D7	D6	D5	D4	D3	D2	D1	D0	-													
Description	This command indicates the current status of the display as described in the table below:																								
	Bit	Description					Comment																		
	D7	RGB Interface Colour Format					Set to '0'																		
	D6						Set to '0'																		
	D5						Set to '0'																		
	D4						Set to '0'																		
	D3	Control Interface Colour Format																							
	D2																								
	D1																								
	D0																								
Restrictions	Bit D7 – RGB Interface Colour Format Selection This bit is not applicable for this project, so it is set to '0'. Bits D6, D5, D4 – RGB Interface Colour Pixel Format Definition These bits are not applicable for this project, so they are set to '0's. Bit D3 – Control Interface Colour Format Selection This bit is not applicable for this project, so it is set to '0'. Bit D2, D1, D0 – Control Interface Colour Pixel Format Definition. These bits are not applicable for this project, so they are set to '110'.																								
	Register Availability	Status			Availability																				
		Normal Mode On, Idle Mode Off, Sleep Out			Yes																				
		Normal Mode On, Idle Mode On, Sleep Out			Yes																				
		Partial Mode On, Idle Mode Off, Sleep Out			Yes																				
		Partial Mode On, Idle Mode On, Sleep Out			Yes																				
Default	Status			Default Value																					
	Power On Sequence			16 bit/pixel																					
	S/W Reset			No Change																					
Flow Chart	<p>Legend:</p> <ul style="list-style-type: none"> Red and Blue Parameter Display Action Mode Sequential transfer 																								

6.3.8 Read Display Image Mode (0Dh)

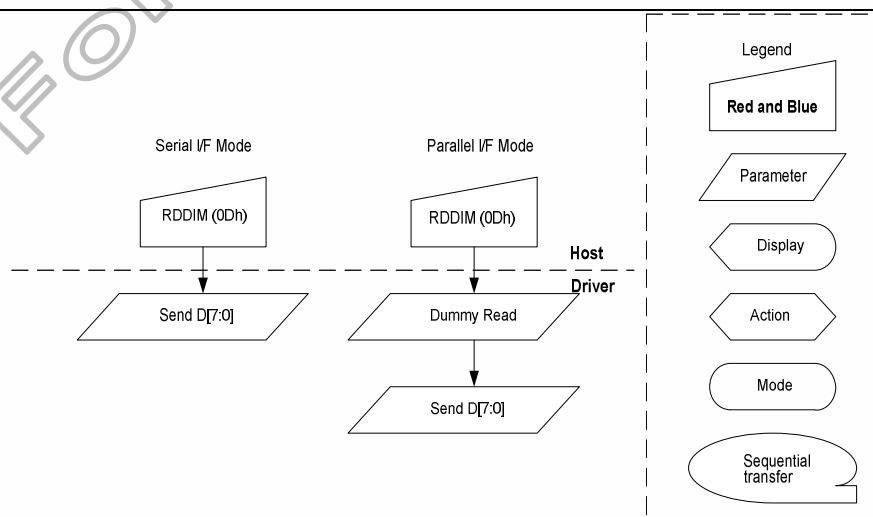0D H		RDDIM (Read Display Image Mode)																																																			
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																								
Command		0	↑	1	0	0	0	0	1	1	0	1	0D																																								
1st parameter		1	1	↑	-	-	-	-	-	-	-	-	-																																								
2 nd parameter		1	1	↑	D7	D6	D5	D4	D3	D2	D1	D0	-																																								
Description	This command indicates the current status of the display as described in the table below: Bit D7 – Vertical Scrolling On/Off '0' = Vertical Scrolling is Off. '1' = Vertical Scrolling is On. Bit D6 – Horizontal Scrolling Status This bit is not applicable for this project, so it is set to '0' Bit D5 – Inversion On/Off '0' = Inversion is Off. '1' = Inversion is On. Bit D4 – All Pixels On This bit is not applicable for this project, so it is set to '0' Bit D3 – All Pixels Off This bit is not applicable for this project, so it is set to '0' Bits D2, D1, D0 – Gamma Curve Selection <table border="1"> <tr> <th>Gamma Curve Selected</th><th>D2</th><th>D1</th><th>D0</th><th>Gamma Set (26h) Parameter</th></tr> <tr> <td>Gamma Curve 1</td><td>0</td><td>0</td><td>0</td><td>GC0</td></tr> <tr> <td>Gamma Curve 2</td><td>0</td><td>0</td><td>1</td><td>GC1</td></tr> <tr> <td>Gamma Curve 3</td><td>0</td><td>1</td><td>0</td><td>GC2</td></tr> <tr> <td>Gamma Curve 4</td><td>0</td><td>1</td><td>1</td><td>GC3</td></tr> <tr> <td>Not Defined</td><td>1</td><td>0</td><td>0</td><td>Not Defined</td></tr> <tr> <td>Not Defined</td><td>1</td><td>0</td><td>1</td><td>Not Defined</td></tr> <tr> <td>Not Defined</td><td>1</td><td>1</td><td>0</td><td>Not Defined</td></tr> </table>													Gamma Curve Selected	D2	D1	D0	Gamma Set (26h) Parameter	Gamma Curve 1	0	0	0	GC0	Gamma Curve 2	0	0	1	GC1	Gamma Curve 3	0	1	0	GC2	Gamma Curve 4	0	1	1	GC3	Not Defined	1	0	0	Not Defined	Not Defined	1	0	1	Not Defined	Not Defined	1	1	0	Not Defined
Gamma Curve Selected	D2	D1	D0	Gamma Set (26h) Parameter																																																	
Gamma Curve 1	0	0	0	GC0																																																	
Gamma Curve 2	0	0	1	GC1																																																	
Gamma Curve 3	0	1	0	GC2																																																	
Gamma Curve 4	0	1	1	GC3																																																	
Not Defined	1	0	0	Not Defined																																																	
Not Defined	1	0	1	Not Defined																																																	
Not Defined	1	1	0	Not Defined																																																	
Restrictions																																																					
Register Availability	<table border="1"> <tr> <th>Status</th><th>Availability</th></tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes																														
Status	Availability																																																				
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																																				
Normal Mode On, Idle Mode On, Sleep Out	Yes																																																				
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																																				
Partial Mode On, Idle Mode On, Sleep Out	Yes																																																				
Default	<table border="1"> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>00HEX</td></tr> <tr> <td>S/W Reset</td><td>00HEX</td></tr> </table>													Status	Default Value	Power On Sequence	00HEX	S/W Reset	00HEX																																		
Status	Default Value																																																				
Power On Sequence	00HEX																																																				
S/W Reset	00HEX																																																				
Flow Chart	 <pre> graph TD RDDIM[RDDIM (0Dh)] --> SendD[Send D[7:0]] RDDIM --> DummyRead[Dummy Read] SendD --> SendD[Send D[7:0]] DummyRead --> SendD[Send D[7:0]] </pre>																																																				



6.3.9 Read Display Signal Mode (0Eh)

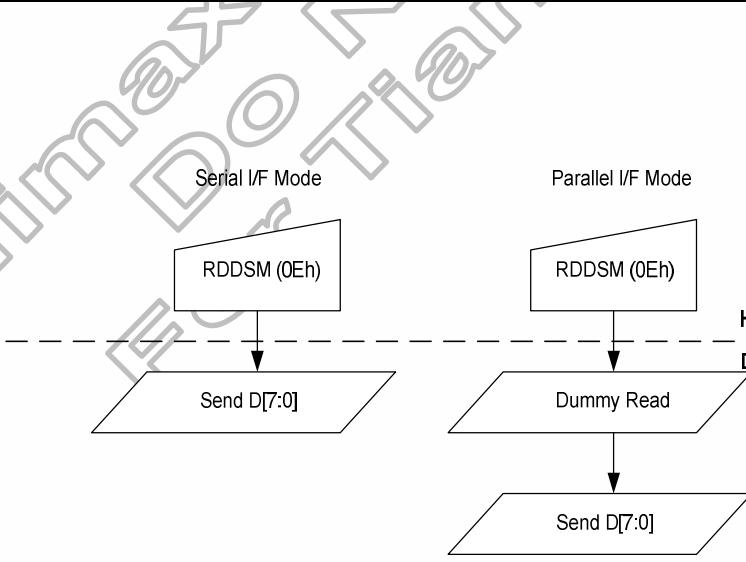RDDS (Read Display Signal Mode)																						
0E H	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX										
Command	0	↑	1	0	0	0	0	1	1	1	0	0E										
1st parameter	1	1	↑	-	-	-	-	-	-	-	-	-										
2 nd parameter	1	1	↑	D7	D6	D5	D4	D3	D2	D1	D0	-										
Description	This command indicates the current status of the display as described in the table below: Bit D7 – Tearing Effect Line On/Off '0' = Tearing Effect Line Off. '1' = Tearing Effect On. Bit D6 – Tearing Effect Line Output Mode, see section 8.3 for mode definitions. '0' = Mode 1. '1' = Mode 2. Bit D5 – Horizontal Sync. (RGB I/F) On/Off This bit is not applicable for this project, so it is set to '0' Bit D4 – Vertical Sync. (RGB I/F) On/Off This bit is not applicable for this project, so it is set to '0' Bit D3 – Pixel Clock (PCLK, RGB I/F) On/Off This bit is not applicable for this project, so it is set to '0' Bit D2 – Data Enable (DE, RGB I/F) On/Off This bit is not applicable for this project, so it is set to '0' D1 are D0 - are for future use and are set to '0'.																					
Restrictions																						
Register Availability	<table border="1"> <tr> <td>Status</td> <td>Availability</td> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes
Status	Availability																					
Normal Mode On, Idle Mode Off, Sleep Out	Yes																					
Normal Mode On, Idle Mode On, Sleep Out	Yes																					
Partial Mode On, Idle Mode Off, Sleep Out	Yes																					
Partial Mode On, Idle Mode On, Sleep Out	Yes																					
Default	<table border="1"> <tr> <td>Status</td> <td>Default Value</td> </tr> <tr> <td>Power On Sequence</td> <td>00HEX</td> </tr> <tr> <td>S/W Reset</td> <td>00HEX</td> </tr> </table>												Status	Default Value	Power On Sequence	00HEX	S/W Reset	00HEX				
Status	Default Value																					
Power On Sequence	00HEX																					
S/W Reset	00HEX																					
Flow Chart	 <pre> graph TD subgraph "Serial I/F Mode" S1[RDDS (0Eh)] --> S2[/Send D[7:0]/] S2 --> S3[/Host Driver/] S3 --> S4[/Send D[7:0]/] end subgraph "Parallel I/F Mode" P1[RDDS (0Eh)] --> P2[/Dummy Read/] P2 --> P3[/Host Driver/] P3 --> P4[/Send D[7:0]/] end </pre> <p>Legend:</p> <ul style="list-style-type: none"> Red and Blue Parameter Display Action Mode Sequential transfer 																					


6.3.10 Read Display Self-Diagnostic Result (0Fh)


0F H		RDDSDR (Read Display Self-Diagnostic Result)											
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command		0	1	↑	0	0	0	0	1	1	1	1	0F
1st parameter		1	↑	1	-	-	-	-	-	-	-	-	-
2 nd parameter		1	↑	1	D7	D6	D5	D4	D3	D2	D1	D0	-
	This command indicates the status of the display self-diagnostic results after Sleep Out -command as described in the table below:												
Description	<ul style="list-style-type: none"> ■ Bit D7 – Register Loading Detection See section 5.17.1 ■ Bit D6 – Functionality Detection See section 5.17.2. ■ Bit D5 – Chip Attachment Detection Set bit D5 to '0', if this function is not implemented. ■ Bit D4 – Display Glass Break Detection. Set bit D4 to '0', if this function is not implemented. ■ Bits D3, D2, D1 and D0 are for future use and are set to '0'. 												
Restrictions													
Register Availability	Status		Availability										
	Normal Mode On, Idle Mode Off, Sleep Out		Yes										
	Normal Mode On, Idle Mode On, Sleep Out		Yes										
	Partial Mode On, Idle Mode Off, Sleep Out		Yes										
	Partial Mode On, Idle Mode On, Sleep Out		Yes										
Default	Status		Availability										
	Power On Sequence		00HEX										
	S/W Reset		00HEX										
	H/W Reset		00HEX										
Flow Chart	<p>The flowchart illustrates the execution of the RDDSDR (0Fh) command. It starts with the command being sent from the host side. The host then performs a dummy read operation. The flowchart is divided into two main sections based on the interface mode: Serial I/F Mode and Parallel I/F Mode. Both modes follow a similar sequence: sending data (D[7:0]) and performing a dummy read. The host driver is the central component receiving the command and executing the read operation. A legend on the right side identifies the symbols used in the flowchart: Red and Blue (square), Parameter (diamond), Display (triangle), Action (hexagon), Mode (oval), and Sequential transfer (elliptical).</p>												

6.3.11 Sleep In (10h)

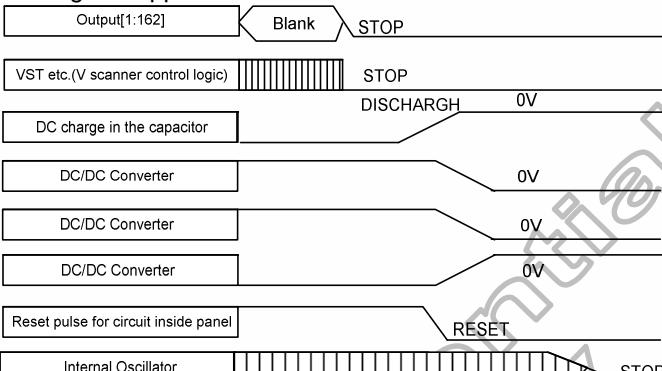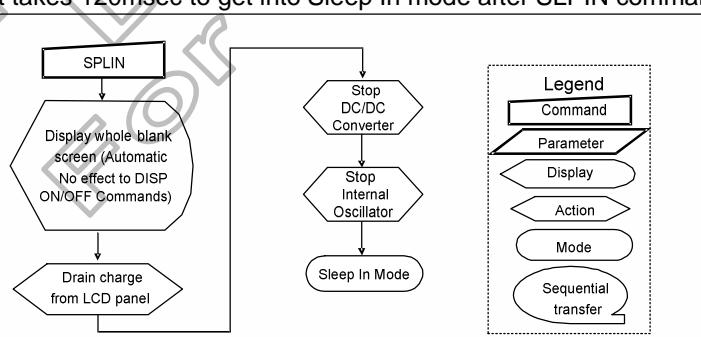10 H		SLPIN (Sleep In)																						
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	0	0	0	1	0	0	0	0	10												
Parameter	NO PARAMETER																							
Description	<p>This command causes the LCD module to enter the minimum power consumption mode. In this mode the DC/DC converter is stopped, Internal oscillator is stopped, and panel scanning is stopped.</p>  <p>MCU interface and memory are still working and the memory keeps its contents. See also section 5.13.</p>																							
Restriction	<p>This command has no effect when module is already in sleep in mode. Sleep In Mode can only be left by the Sleep Out Command (11h). It will be necessary to wait 5msec before sending next command, this is to allow time for the supply voltages and clock circuits to stabilize. It will be necessary to wait 120msec after sending Sleep Out command (when in Sleep In Mode) before Sleep In command can be sent.</p>																							
Register Availability	<table border="1"> <tr> <th>Status</th> <th>Availability</th> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </table>		Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes										
Status	Availability																							
Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
Normal Mode On, Idle Mode On, Sleep Out	Yes																							
Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In or Booster Off	Yes																							
Default	<table border="1"> <tr> <th>Status</th> <th>Default Value</th> </tr> <tr> <td>Power On Sequence</td> <td>Sleep in mode</td> </tr> <tr> <td>S/W Reset</td> <td>Sleep in mode</td> </tr> <tr> <td>H/W Reset</td> <td>Sleep in mode</td> </tr> </table>		Status	Default Value	Power On Sequence	Sleep in mode	S/W Reset	Sleep in mode	H/W Reset	Sleep in mode														
Status	Default Value																							
Power On Sequence	Sleep in mode																							
S/W Reset	Sleep in mode																							
H/W Reset	Sleep in mode																							
Flow Chart	<p>It takes 120msec to get into Sleep In mode after SLPIN command issued.</p> 																							

6.3.12 Sleep Out (11h)

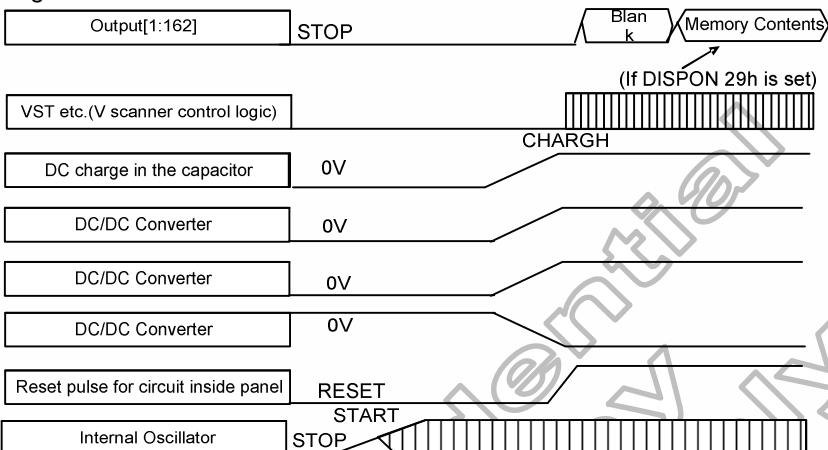11 H		SLPOUT (Sleep Out)																						
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	0	0	0	1	0	0	0	1	11												
Parameter	NO PARAMETER																							
Description	<p>This command turns off sleep mode. In this mode the DC/DC converter is enabled, Internal oscillator is started, and panel scanning is started.</p>  <p>The timing diagram illustrates the sequence of events following the SLPOUT command. It shows the state of various signals over time. Key points include:</p> <ul style="list-style-type: none"> Output[1:162] goes from STOP to BLANK (If DISPON 29h is set). VST etc.(V scanner control logic) goes from 0V to CHARGH. DC charge in the capacitor goes from 0V to CHARGH. DC/DC Converter goes from 0V to CHARGH. DC/DC Converter goes from 0V to CHARGH. DC/DC Converter goes from 0V to CHARGH. Reset pulse for circuit inside panel goes from RESET to START. Internal Oscillator goes from STOP to START. 																							
	<p>See also section 5.13</p>																							
Restriction	<p>This command has no effect when module is already in sleep out mode. Sleep Out Mode can only be left by the Sleep In Command (10h). It will be necessary to wait 5msec before sending next command, this is to allow time for the supply voltages and clock circuits to stabilize. The display module loads all display supplier's factory default values to the registers during this 5msec and there cannot be any abnormal visual effect on the display image if factory default and register values are same when this load is done and when the display module is already Sleep Out -mode. The display module is doing self-diagnostic functions during this 5msec. See also section 8.10. It will be necessary to wait 120msec after sending Sleep In command (when in Sleep Out mode) before Sleep Out command can be sent.</p>																							
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes
Status	Availability																							
Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
Normal Mode On, Idle Mode On, Sleep Out	Yes																							
Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In or Booster Off	Yes																							
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>Sleep In Mode</td> </tr> <tr> <td>S/W Reset</td> <td>Sleep In Mode</td> </tr> </tbody> </table>												Status	Default Value	Power On Sequence	Sleep In Mode	S/W Reset	Sleep In Mode						
Status	Default Value																							
Power On Sequence	Sleep In Mode																							
S/W Reset	Sleep In Mode																							
Flow Chart	It takes 120msec to become Sleep Out mode after SLPOUT command issued.																							

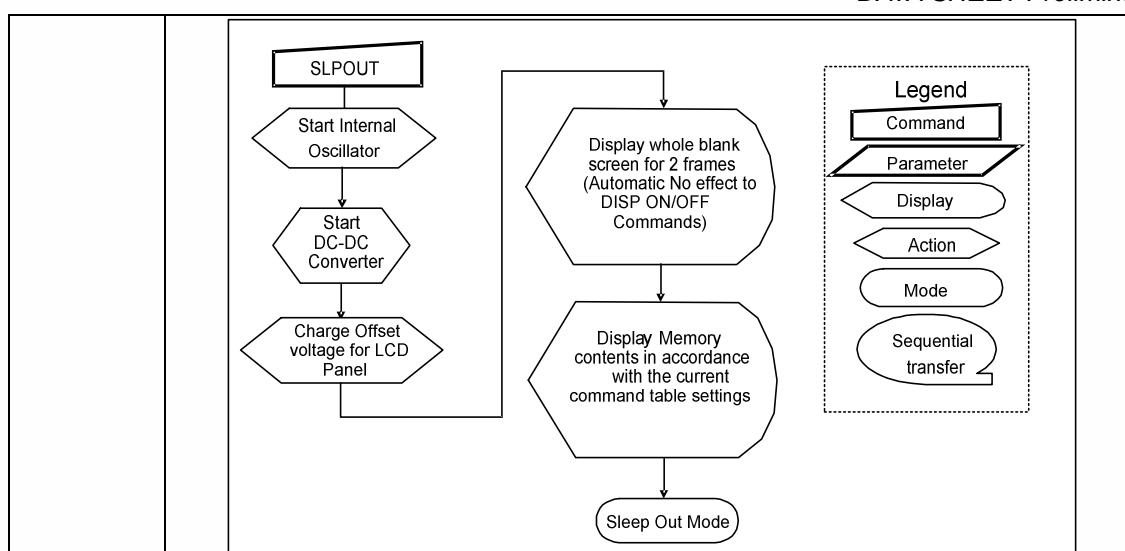

Himax Confidential
For DO Not Copy Only
Tianma



6.3.13 Partial Mode On (12h)

12 H	PTLON (Partial Mode On)											
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	0	0	0	1	0	0	1	0	12
Parameter	NO PARAMETER											
Description	This command turns on partial mode. The partial mode window is described by the Partial Area command (30H). To leave Partial mode, the Normal Display Mode On command (13H) should be written. See also section 8.6.2.											
Restrictions	This command has no effect when Partial mode is active.											
Register Availability	Status			Availability								
	Normal Mode On, Idle Mode Off, Sleep Out			Yes								
	Normal Mode On, Idle Mode On, Sleep Out			Yes								
	Partial Mode On, Idle Mode Off, Sleep Out			Yes								
	Partial Mode On, Idle Mode On, Sleep Out			Yes								
Default	Status			Default Value								
	Power On Sequence			Normal Mode On								
	S/W Reset			Normal Mode On								
Flow Chart	See Partial Area (30h)											

6.3.14 Normal Display Mode On (13h)


13 H	NORON (Normal Display Mode On)												
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	0	0	0	1	0	0	1	1	13	
Parameter	NO PARAMETER												
Description	This command returns the display to normal mode. Normal display mode on means Partial mode off, Scroll mode Off.												
Restriction	This command has no effect when Normal Display mode is active.												
Register Availability	Status		Availability										
	Normal Mode On, Idle Mode Off, Sleep Out		Yes										
	Normal Mode On, Idle Mode On, Sleep Out		Yes										
	Partial Mode On, Idle Mode Off, Sleep Out		Yes										
	Partial Mode On, Idle Mode On, Sleep Out		Yes										
Default	Status		Default Value										
	Power On Sequence		Normal Mode On										
	S/W Reset		Normal Mode On										
Flow Chart	See Partial Area and Vertical Scrolling Definition Descriptions for details of when to use this command.												

6.3.15 Display Inversion Off (20h)

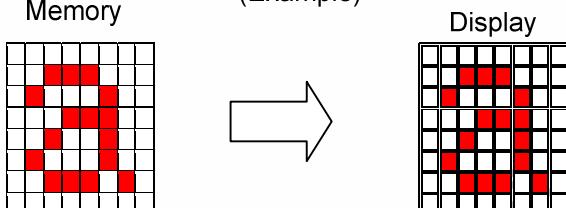
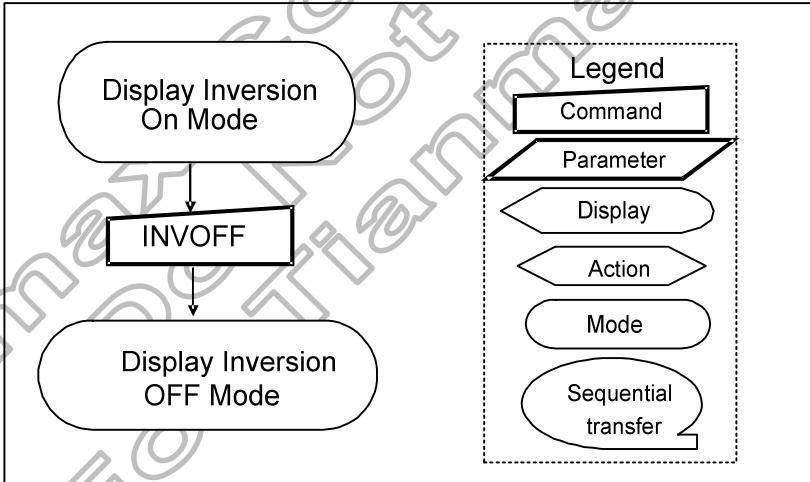
20 H		INVOFF (Display Inversion Off)																							
		DNC	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command		0	1	↑	0	0	1	0	0	0	0	0	20												
Parameter		NO PARAMETER																							
Description	This command is used to recover from display inversion mode. This command makes no change of contents of frame memory. This command does not change any other status.																								
	(Example) 																								
Restriction	This command has no effect when module is already in inversion off mode.																								
Register Availability	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Status</td> <td style="padding: 2px;">Availability</td> </tr> <tr> <td style="padding: 2px;">Normal Mode On, Idle Mode Off, Sleep Out</td> <td style="padding: 2px;">Yes</td> </tr> <tr> <td style="padding: 2px;">Normal Mode On, Idle Mode On, Sleep Out</td> <td style="padding: 2px;">Yes</td> </tr> <tr> <td style="padding: 2px;">Partial Mode On, Idle Mode Off, Sleep Out</td> <td style="padding: 2px;">Yes</td> </tr> <tr> <td style="padding: 2px;">Partial Mode On, Idle Mode On, Sleep Out</td> <td style="padding: 2px;">Yes</td> </tr> <tr> <td style="padding: 2px;">Sleep In or Booster Off</td> <td style="padding: 2px;">Yes</td> </tr> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In or Booster Off	Yes																								
Default	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Status</td> <td style="padding: 2px;">Default Value</td> </tr> <tr> <td style="padding: 2px;">Power On Sequence</td> <td style="padding: 2px;">Display Inversion off</td> </tr> <tr> <td style="padding: 2px;">S/W Reset</td> <td style="padding: 2px;">Display Inversion off</td> </tr> <tr> <td style="padding: 2px;">H/W Reset</td> <td style="padding: 2px;">Display Inversion off</td> </tr> </table>													Status	Default Value	Power On Sequence	Display Inversion off	S/W Reset	Display Inversion off	H/W Reset	Display Inversion off				
Status	Default Value																								
Power On Sequence	Display Inversion off																								
S/W Reset	Display Inversion off																								
H/W Reset	Display Inversion off																								
Flow Chart	 <pre> graph TD A([Display Inversion On Mode]) --> B[INVOFF] B --> C([Display Inversion OFF Mode]) </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																								

6.3.16 Display Inversion On (21h)



6.3.17 Gamma Set (26h)

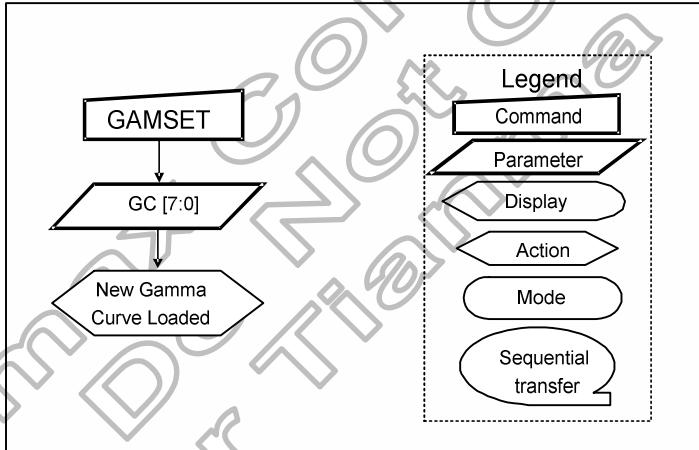26 H		GAMSET (Gamma Set)																										
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																
Command	0	↑	1	0	0	1	0	0	1	1	0	26																
Parameter	1	↑	1	GC7	GC6	GC5	GC4	GC3	GC2	GC1	GC0	-																
Description	This command is used to select the desired Gamma curve for the current display. A maximum of 4 fixed gamma curves can be selected. The curve is selected by setting the appropriate bit in the parameter as described in the Table: <table border="1"> <thead> <tr> <th>GC[7..0]</th> <th>Parameter</th> <th>Curve Selected</th> </tr> </thead> <tbody> <tr> <td>01h</td> <td>GC0</td> <td>Gamma Curve 1</td> </tr> <tr> <td>02h</td> <td>GC1</td> <td>Gamma Curve 2</td> </tr> <tr> <td>04h</td> <td>GC2</td> <td>Gamma Curve 3</td> </tr> <tr> <td>08h</td> <td>GC3</td> <td>Gamma Curve 4</td> </tr> </tbody> </table>													GC[7..0]	Parameter	Curve Selected	01h	GC0	Gamma Curve 1	02h	GC1	Gamma Curve 2	04h	GC2	Gamma Curve 3	08h	GC3	Gamma Curve 4
GC[7..0]	Parameter	Curve Selected																										
01h	GC0	Gamma Curve 1																										
02h	GC1	Gamma Curve 2																										
04h	GC2	Gamma Curve 3																										
08h	GC3	Gamma Curve 4																										
Restriction	Values of GC[7..0] not shown in table above are invalid and will not change the current selected Gamma curve until valid value is received.																											
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes			
Status	Availability																											
Normal Mode On, Idle Mode Off, Sleep Out	Yes																											
Normal Mode On, Idle Mode On, Sleep Out	Yes																											
Partial Mode On, Idle Mode Off, Sleep Out	Yes																											
Partial Mode On, Idle Mode On, Sleep Out	Yes																											
Sleep In or Booster Off	Yes																											
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>01h</td> </tr> <tr> <td>S/W Reset</td> <td>01h</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	01h	S/W Reset	01h									
Status	Default Value																											
Power On Sequence	01h																											
S/W Reset	01h																											
Flow Chart	 <pre> graph TD GAMSET[GAMSET] --> GC[GC [7:0]] GC --> NewGamma[New Gamma Curve Loaded] </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																											

6.3.18 Display Off(28h)

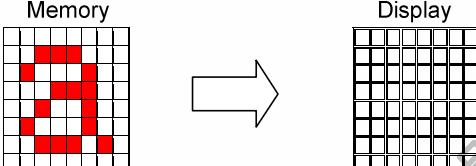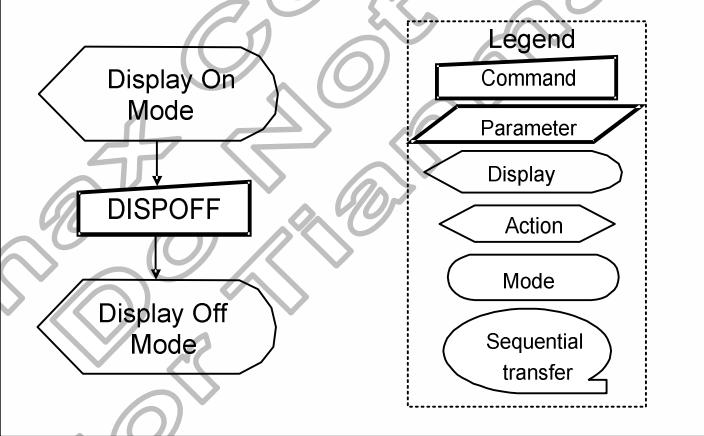
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	0	0	1	0	1	0	0	0	28
Parameter	NO PARAMETER											
Description	<p>This command is used to enter into DISPLAY OFF mode. In this mode, the output from Frame Memory is disabled and blank page inserted. This command makes no change of contents of frame memory. This command does not change any other status. There will be no abnormal visible effect on the display.</p> <p>Example</p> 											
Restriction	This command has no effect when module is already in display off mode.											
Register Availability	Status	Availability										
	Normal Mode On, Idle Mode Off, Sleep Out	Yes										
	Normal Mode On, Idle Mode On, Sleep Out	Yes										
	Partial Mode On, Idle Mode Off, Sleep Out	Yes										
	Partial Mode On, Idle Mode On, Sleep Out	Yes										
	Sleep In or Booster Off	Yes										
Default	Status	Default Value										
	Power On Sequence	Display off										
	S/W Reset	Display off										
	H/W Reset	Display off										
Flow Chart	 <pre> graph TD A([Display On Mode]) --> B[DISPOFF] B --> C([Display Off Mode]) style A fill:none,stroke:none style B fill:none,stroke:none style C fill:none,stroke:none </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 											

6.3.19 Display On (29h)

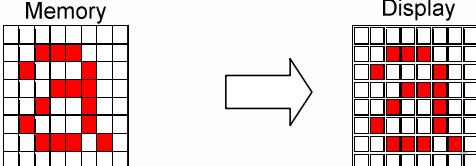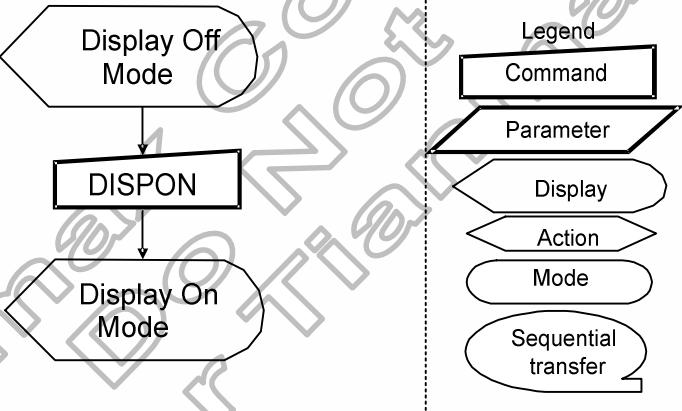
29 H		DISPON (Display On)																							
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX													
Command	0	↑	1	0	0	1	0	1	0	0	1	29													
Parameter	NO PARAMETER																								
Description	<p>This command is used to recover from DISPLAY OFF mode. Output from the Frame Memory is enabled. This command makes no change of contents of frame memory. This command does not change any other status.</p> <p>(Example)</p> 																								
Restriction	This command has no effect when module is already in display on mode.																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In or Booster Off	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>Display off</td> </tr> <tr> <td>S/W Reset</td> <td>Display off</td> </tr> <tr> <td>H/W Reset</td> <td>Display off</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	Display off	S/W Reset	Display off	H/W Reset	Display off				
Status	Default Value																								
Power On Sequence	Display off																								
S/W Reset	Display off																								
H/W Reset	Display off																								
Flow Chart	 <pre> graph TD A([Display Off Mode]) --> B[DISPON] B --> C([Display On Mode]) </pre>																								

6.3.20 Column Address Set (2Ah)

2A H		CASET (Column Address Set)																					
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX										
Command	0	↑	1	0	0	1	0	1	0	1	0	2A											
parameter 1st	1	↑	1	SC15	SC14	SC13	SC12	SC11	SC10	SC9	SC8	-											
parameter 2nd	1	↑	1	SC7	SC6	SC5	SC4	SC3	SC2	SC1	SC0	-											
parameter3rd	1	↑	1	EC15	EC14	EC13	EC12	EC11	EC10	EC9	EC8	-											
parameter4th	1	↑	1	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0	-											
Description	This command is used to define area of frame memory where MCU can access. This command makes no change on the other driver status. The values of SC[15:0] and EC[15:0] are referred when RAMWR command comes. Each value represents one column line in the Frame Memory. (Example) (Example)																						
Restriction	SC[15:0] always must be equal to or less than EC[15:0] Note 1: When SC[15:0] or EC[15:0] is greater than 83h (when MADCTL's B5=0) or A1h (when MADCTL's B5=1), data of out of range will be ignored																						
Register Availability	Status Normal Mode On, Idle Mode Off, Sleep Out		Availability Yes																				
Normal Mode On, Idle Mode On, Sleep Out		Yes																					
Partial Mode On, Idle Mode Off, Sleep Out		Yes																					
Partial Mode On, Idle Mode On, Sleep Out		Yes																					
Sleep In or Booster Off		Yes																					
Default	Status	Default Value																					
Power On Sequence	SC[15:0]=0000				EC[15:0]=0083																		
S/W Reset	When MADCTL's B5=0:				When MADCTL's B5=0:																		
	SC[15:0]=0000				EC[15:0]=0083																		
	When MADCTL's B5=1:				When MADCTL's B5=1:																		
	SC[15:0]=0000				EC[15:0]=00A1																		
H/W Reset	SC[15:0]=0000				EC[15:0]=0083																		

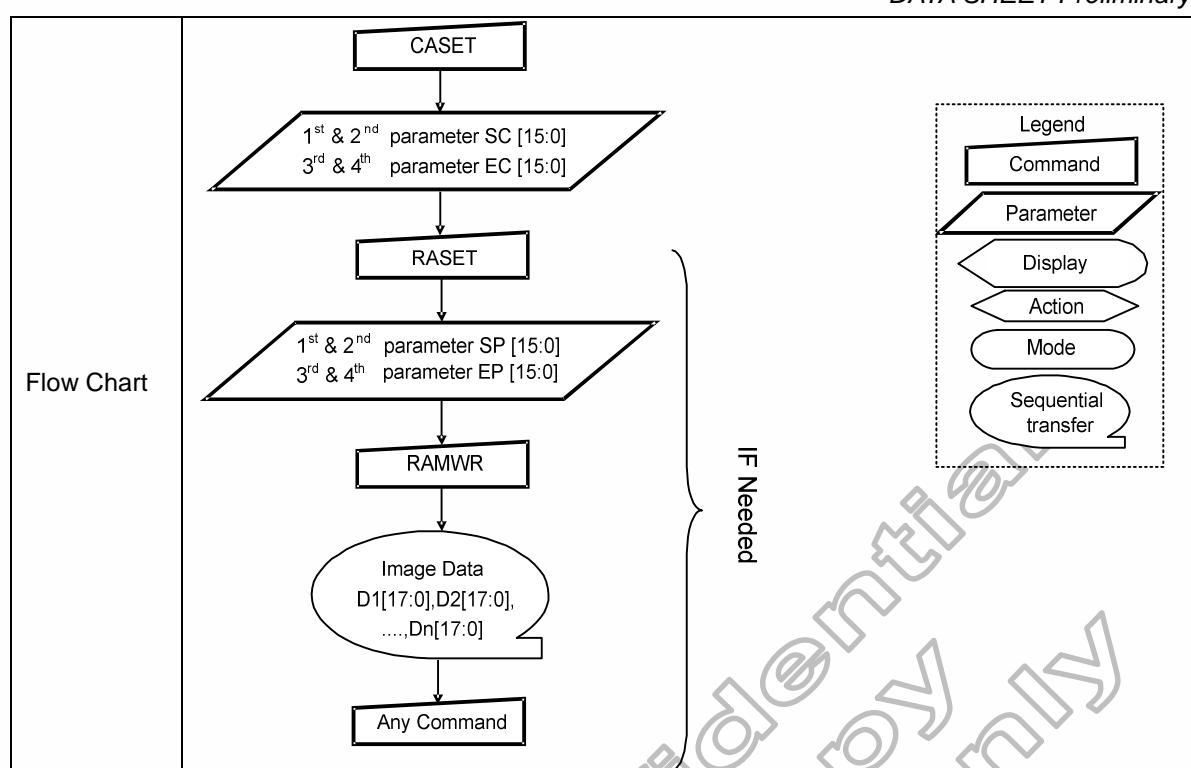


6.3.21 Page Address Set (2Bh)

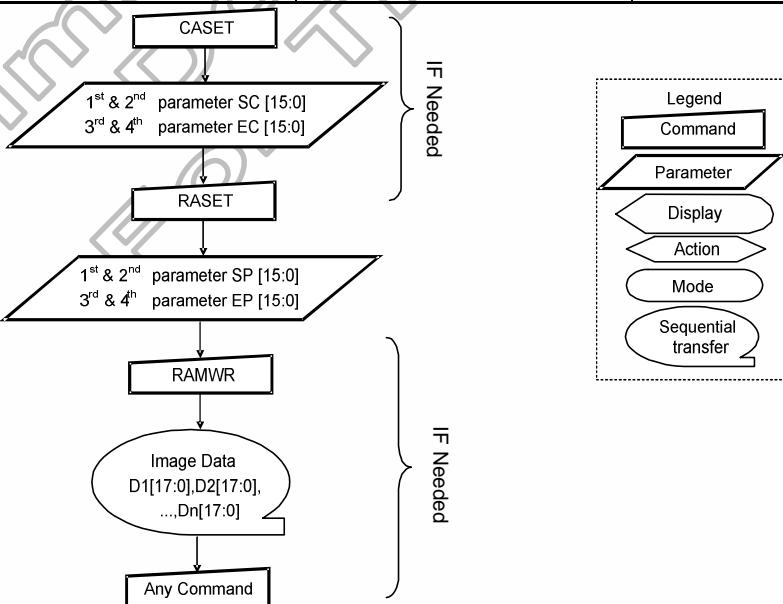2B H		PASET (Page Address Set)																																							
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																												
Command		0	↑	1	0	0	1	0	1	0	1	1	2B																												
parameter 1st	1	↑	1	SP15	SP14	SP13	SP12	SP11	SP10	SP9	SP8	00..																													
parameter 2nd	1	↑	1	SP7	SP6	SP5	SP4	SP3	SP2	SP1	SP0	Note 1																													
parameter3rd	1	↑	1	EP15	EP14	EP13	EP12	EP11	EP10	EP9	EP8	00.. Note 1																													
parameter4th	1	↑	1	EP7	EP6	EP5	EP4	EP3	EP2	EP1	EP0																														
Description	This command is used to define area of frame memory where MCU can access. This command makes no change on the other driver status. The values of SP[15:0] and EP[15:0] are referred when RAMWR command comes. Each value represents one Page line in the Frame Memory. (Example)																																								
Restriction	SP[15:0] always must be equal to or less than EP[15:0] Note 1: When SP[15:0] or EP[15:0] is greater than A1h (When MADCTL's B5=0) or 83h (When MADCTL's B5=1), data of out of range will be ignored.																																								
Register Availability	<table border="1"> <tr> <td>Status</td> <td>Availability</td> <td></td> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> <td></td> </tr> </table>													Status	Availability		Normal Mode On, Idle Mode Off, Sleep Out	Yes		Normal Mode On, Idle Mode On, Sleep Out	Yes		Partial Mode On, Idle Mode Off, Sleep Out	Yes		Partial Mode On, Idle Mode On, Sleep Out	Yes														
Status	Availability																																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																																								
Default	<table border="1"> <tr> <td>Status</td> <td colspan="2">Default Value</td> <td></td> </tr> <tr> <td>Power On Sequence</td> <td>SP[15:0]=0000</td> <td>EP[15:0]=00A1</td> <td></td> </tr> <tr> <td>S/W Reset</td> <td>When MADCTL's B5=0:</td> <td>When MADCTL's B5=0:</td> <td></td> </tr> <tr> <td></td> <td>SP[15:0]=0000</td> <td>EP[15:0]=00A1</td> <td></td> </tr> <tr> <td></td> <td>When MADCTL's B5=1:</td> <td>When MADCTL's B5=1:</td> <td></td> </tr> <tr> <td></td> <td>SP[15:0]=0000</td> <td>EP[15:0]=0083</td> <td></td> </tr> <tr> <td>H/W Reset</td> <td>SP[15:0]=0000</td> <td>EP[15:0]=00A1</td> <td></td> </tr> </table>													Status	Default Value			Power On Sequence	SP[15:0]=0000	EP[15:0]=00A1		S/W Reset	When MADCTL's B5=0:	When MADCTL's B5=0:			SP[15:0]=0000	EP[15:0]=00A1			When MADCTL's B5=1:	When MADCTL's B5=1:			SP[15:0]=0000	EP[15:0]=0083		H/W Reset	SP[15:0]=0000	EP[15:0]=00A1	
Status	Default Value																																								
Power On Sequence	SP[15:0]=0000	EP[15:0]=00A1																																							
S/W Reset	When MADCTL's B5=0:	When MADCTL's B5=0:																																							
	SP[15:0]=0000	EP[15:0]=00A1																																							
	When MADCTL's B5=1:	When MADCTL's B5=1:																																							
	SP[15:0]=0000	EP[15:0]=0083																																							
H/W Reset	SP[15:0]=0000	EP[15:0]=00A1																																							
Flow Chart	 <pre> graph TD CASET[CASET] --> RASET[RASET] RASET --> RAMWR[RAMWR] RAMWR --> ImageData((Image Data D1[17:0], D2[17:0], ... , Dn[17:0])) ImageData --> AnyCommand[Any Command] CASET -- "IF Needed" --> Parameters1["1st & 2nd parameter SC [15:0] 3rd & 4th parameter EC [15:0]"] Parameters1 --> RASET RASET -- "IF Needed" --> Parameters2["1st & 2nd parameter SP [15:0] 3rd & 4th parameter EP [15:0]"] Parameters2 --> RAMWR </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																																								

6.3.22 Memory Write (2Ch)


2C H	RAMWR (Memory Write)																										
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX															
Command	0	↑	1	0	0	1	0	1	1	0	0	2C															
1st parameter	1	↑	1	D15	D14	D13	D12	D11	D10	D9	D8	00..FF															
Description	<p>This command is used to transfer data from MCU to frame memory. This command makes no change to the other driver status. When this command is accepted, the column register and the page register are reset to the Start Column/Start Page positions. The Start Column/Start Page positions are different in accordance with MADCTL setting. (See follow table) Then D[7:0] is stored in frame memory and the column register and the page register incremented as follow table.</p> <table border="1"> <thead> <tr> <th>Condition</th> <th>Column Counter</th> <th>Page Counter</th> </tr> </thead> <tbody> <tr> <td>When RAMWR/RAMRD command is accepted</td> <td>Return to "Start Column"</td> <td>Return to "Start Page"</td> </tr> <tr> <td>Complete Pixel Read/Write action</td> <td>Increment by 1</td> <td>No change</td> </tr> <tr> <td>The Column counter value is larger than "End column"</td> <td>Return to "Start Column"</td> <td>Increment by 1</td> </tr> <tr> <td>The Page counter value is larger than "End page"</td> <td>Return to "Start Column"</td> <td>Return to "Start Page"</td> </tr> </tbody> </table>												Condition	Column Counter	Page Counter	When RAMWR/RAMRD command is accepted	Return to "Start Column"	Return to "Start Page"	Complete Pixel Read/Write action	Increment by 1	No change	The Column counter value is larger than "End column"	Return to "Start Column"	Increment by 1	The Page counter value is larger than "End page"	Return to "Start Column"	Return to "Start Page"
Condition	Column Counter	Page Counter																									
When RAMWR/RAMRD command is accepted	Return to "Start Column"	Return to "Start Page"																									
Complete Pixel Read/Write action	Increment by 1	No change																									
The Column counter value is larger than "End column"	Return to "Start Column"	Increment by 1																									
The Page counter value is larger than "End page"	Return to "Start Column"	Return to "Start Page"																									
Restriction	In all color modes, there is no restriction on length of parameters.																										
Register Availability	Status		Availability																								
	Normal Mode On, Idle Mode Off, Sleep Out		Yes																								
	Normal Mode On, Idle Mode On, Sleep Out		Yes																								
	Partial Mode On, Idle Mode Off, Sleep Out		Yes																								
	Partial Mode On, Idle Mode On, Sleep Out		Yes																								
Default	Status		Default Value																								
	Power On Sequence		Contents of memory is set randomly																								
	S/W Reset		Contents of memory is not cleared																								
Flow Chart	 <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																										

6.3.23 Colour Set (2Dh)

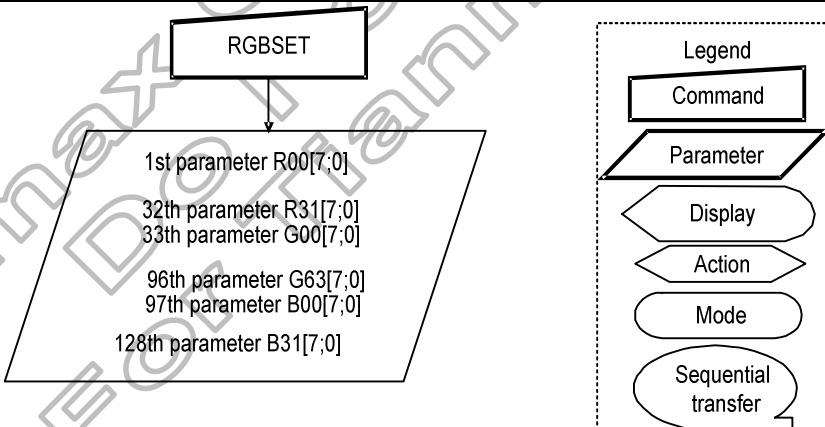2D H	RGBSET (Color Set)																						
	DNC	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command	DNC	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
1st parameter	0	1	↑	0	0	1	0	1	1	0	1	2D											
:	1	1	↑	X	X	R005	R004	R003	R002	R001	R000	00..FF											
16th parameter	1	1	↑	X	X	Rnn5	Rnn4	Rnn3	Rnn2	Rnn1	Rnn0	00..FF											
17 th parameter	1	1	↑	X	X	R315	R314	R313	R312	R311	R310	00..FF											
33rd parameter	1	1	↑	X	X	G005	G004	G003	G002	G001	G000	00..FF											
..	1	1	↑	X	X	Gnn5	Gnn4	Gnn3	Gnn2	Gnn1	Gnn0	00..FF											
96 th parameter	1	1	↑	X	X	G635	G634	G633	G632	G631	G630	00..FF											
97 th parameter	1	1	↑	X	X	B005	B004	B003	B002	B001	B000	00..FF											
128 th parameter	1	1	↑	X	X	B315	B314	B313	B312	B311	B310	00..FF											
Description	This command is used to define the LUT for 12bit-to-18bit/16bit-to-18bit color depth conversions. (See also section 8.9) 128 bytes must be written to the LUT regardless of the color mode. Only the values in Section 8.9 are referred. This command has no effect on other commands/parameters and Contents of frame memory. Visible change takes effect next time the Frame Memory is written to.																						
Restriction																							
Register Availability	<table border="1"> <tr> <td>Status</td> <td>Availability</td> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes
Status	Availability																						
Normal Mode On, Idle Mode Off, Sleep Out	Yes																						
Normal Mode On, Idle Mode On, Sleep Out	Yes																						
Partial Mode On, Idle Mode Off, Sleep Out	Yes																						
Partial Mode On, Idle Mode On, Sleep Out	Yes																						
Default	<table border="1"> <tr> <td>Status</td> <td>Default Value</td> </tr> <tr> <td>Power On Sequence</td> <td>Random values</td> </tr> <tr> <td>S/W Reset</td> <td>Contents of the look-up table protected</td> </tr> <tr> <td>H/W Reset</td> <td>Random values</td> </tr> </table>													Status	Default Value	Power On Sequence	Random values	S/W Reset	Contents of the look-up table protected	H/W Reset	Random values		
Status	Default Value																						
Power On Sequence	Random values																						
S/W Reset	Contents of the look-up table protected																						
H/W Reset	Random values																						
Flow Chart	 <p>The flowchart illustrates the sequence of parameters for the RGBSET command. It begins with the command itself, followed by a series of parameters: 1st parameter R00[7:0], 32th parameter R31[7:0], 33th parameter G00[7:0], 96th parameter G63[7:0], 97th parameter B00[7:0], and 128th parameter B31[7:0]. The legend on the right defines the symbols used in the flowchart: Command (rectangle), Parameter (trapezoid), Display (left-pointing triangle), Action (right-pointing triangle), Mode (oval), and Sequential transfer (elliptical arrow).</p>																						




6.3.24 Memory Read (2Eh)


2E H		RAMRD (Memory Read)																										
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX															
Command		0	↑	1	0	0	1	0	1	1	1	0	2E															
1st parameter		1	1	↑	-	-	-	-	-	-	-	-	-															
2nd parameter		1	1	↑	D15	D14	D13	D12	D11	D10	D9	D8	-															
Description	This command is used to transfer data from frame memory to MCU. See section 9.1. This command makes no change to the other driver status. When this command is accepted, the column register and the page register are reset to the Start Column/Start Page positions. The Start Column/Start Page positions are different in accordance with MADCTL setting. (See follow table) Then D[7:0] is read back from the frame memory and the column register and the page register incremented as follow table.																											
	<table border="1"> <thead> <tr> <th>Condition</th> <th>Column Counter</th> <th>Page Counter</th> </tr> </thead> <tbody> <tr> <td>When RAMWR/RAMRD command is accepted</td> <td>Return to "Start Column"</td> <td>Return to "Start Page"</td> </tr> <tr> <td>Complete Pixel Read/Write action</td> <td>Increment by 1</td> <td>No change</td> </tr> <tr> <td>The Column counter value is larger than "End column"</td> <td>Return to "Start Column"</td> <td>Increment by 1</td> </tr> <tr> <td>The Page counter value is larger than "End page"</td> <td>Return to "Start Column"</td> <td>Return to "Start Page"</td> </tr> </tbody> </table> <p>Frame Read can be stopped by sending any other command.</p>													Condition	Column Counter	Page Counter	When RAMWR/RAMRD command is accepted	Return to "Start Column"	Return to "Start Page"	Complete Pixel Read/Write action	Increment by 1	No change	The Column counter value is larger than "End column"	Return to "Start Column"	Increment by 1	The Page counter value is larger than "End page"	Return to "Start Column"	Return to "Start Page"
Condition	Column Counter	Page Counter																										
When RAMWR/RAMRD command is accepted	Return to "Start Column"	Return to "Start Page"																										
Complete Pixel Read/Write action	Increment by 1	No change																										
The Column counter value is larger than "End column"	Return to "Start Column"	Increment by 1																										
The Page counter value is larger than "End page"	Return to "Start Column"	Return to "Start Page"																										
Restriction	In all color modes, the Frame Read is always like figure below. There is no restriction on length of parameters. Note – Memory Read is only possible via the Parallel Interface.																											
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes					
Status	Availability																											
Normal Mode On, Idle Mode Off, Sleep Out	Yes																											
Normal Mode On, Idle Mode On, Sleep Out	Yes																											
Partial Mode On, Idle Mode Off, Sleep Out	Yes																											
Partial Mode On, Idle Mode On, Sleep Out	Yes																											
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>Contents of memory is set randomly</td> </tr> <tr> <td>S/W Reset</td> <td>Contents of memory is not cleared</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	Contents of memory is set randomly	S/W Reset	Contents of memory is not cleared									
Status	Default Value																											
Power On Sequence	Contents of memory is set randomly																											
S/W Reset	Contents of memory is not cleared																											

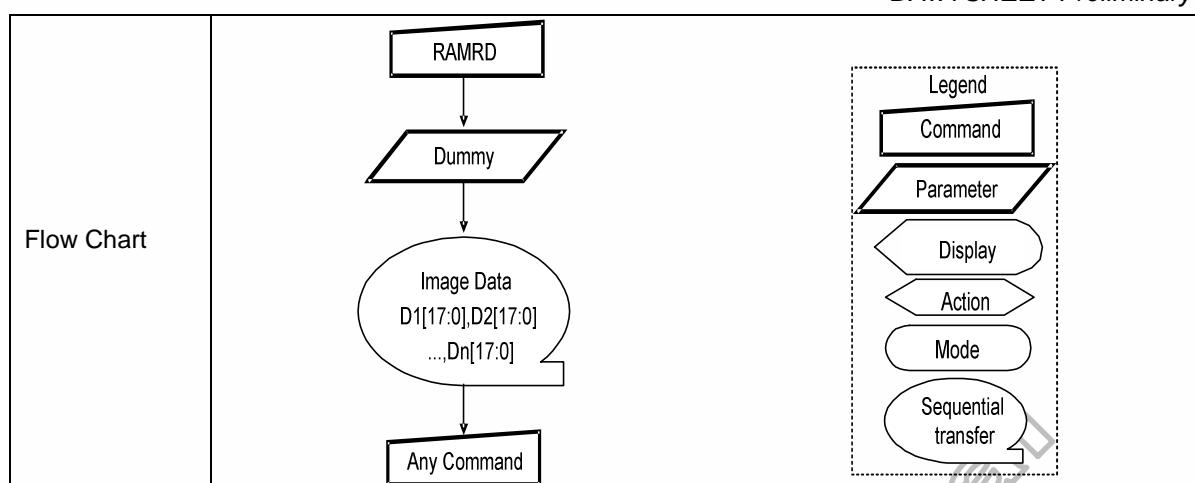


Himax Confidential
DO NOT Copy
For Tianma Only


6.3.25 Partial Area (30h)

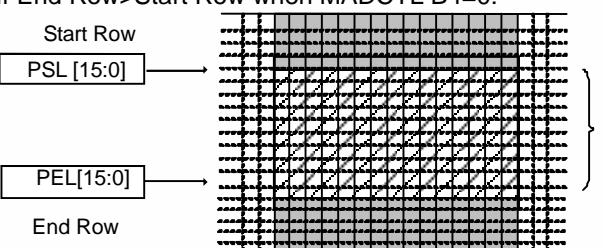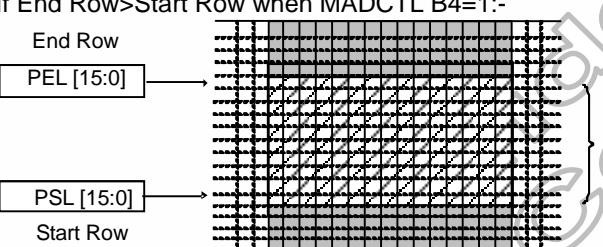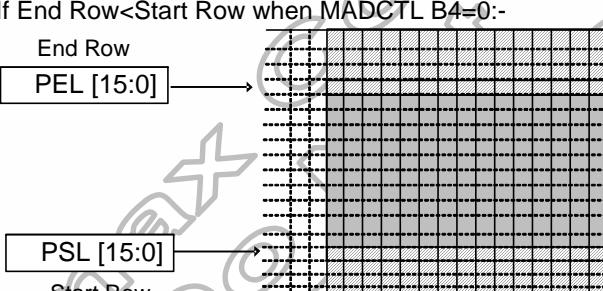30 H		PLTAR (Partial Area)											
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	0	0	1	1	0	0	0	0	0	30
1st Parameter	1	↑	1	PSL15	PSL14	PSL13	PSL12	PSL11	PSL10	PSL9	PSL8		
2nd Parameter	1	↑	1	PSL7	PSL6	PSL5	PSL4	PSL3	PSL2	PSL1	PSL0		00 ...A1
3rd Parameter	1	↑	1	PEL15	PEL14	PEL13	PEL12	PEL11	PEL10	PEL9	PEL8		00 ...A1
4th Parameter	1	↑	1	PEL7	PEL6	PEL5	PEL4	PEL3	PEL2	PEL1	PEL0		
Description	<p>This command defines the partial mode's display area. There are 4 parameters associated with this command, the first defines the Start Row (SR) and the second the End Row (ER), as illustrated in the figures below. SR and ER refer to the Frame Memory Line Pointer.</p> <p>If End Row>Start Row when MADCTL B4=0:-</p>  <p>If End Row>Start Row when MADCTL B4=1:-</p>  <p>If End Row<Start Row when MADCTL B4=0:-</p>  <p>If End Row = Start Row then the Partial Area will be one row deep.</p>												
Restriction	SR[15...0] and ER[15...0] cannot be greater than A1h.												
Register Availability		Status		Availability									
Normal Mode On, Idle Mode Off, Sleep Out		Yes											
Normal Mode On, Idle Mode On, Sleep Out		Yes											
Partial Mode On, Idle Mode Off, Sleep Out		Yes											
Default		Status		Default Value									
Power On Sequence		SR[15..0]=00		ER[15..0]=A1									
S/W Reset		SR[15..0]=00		ER[15..0]=A1									
Flow Chart	1. To Enter Partial Mode:-												


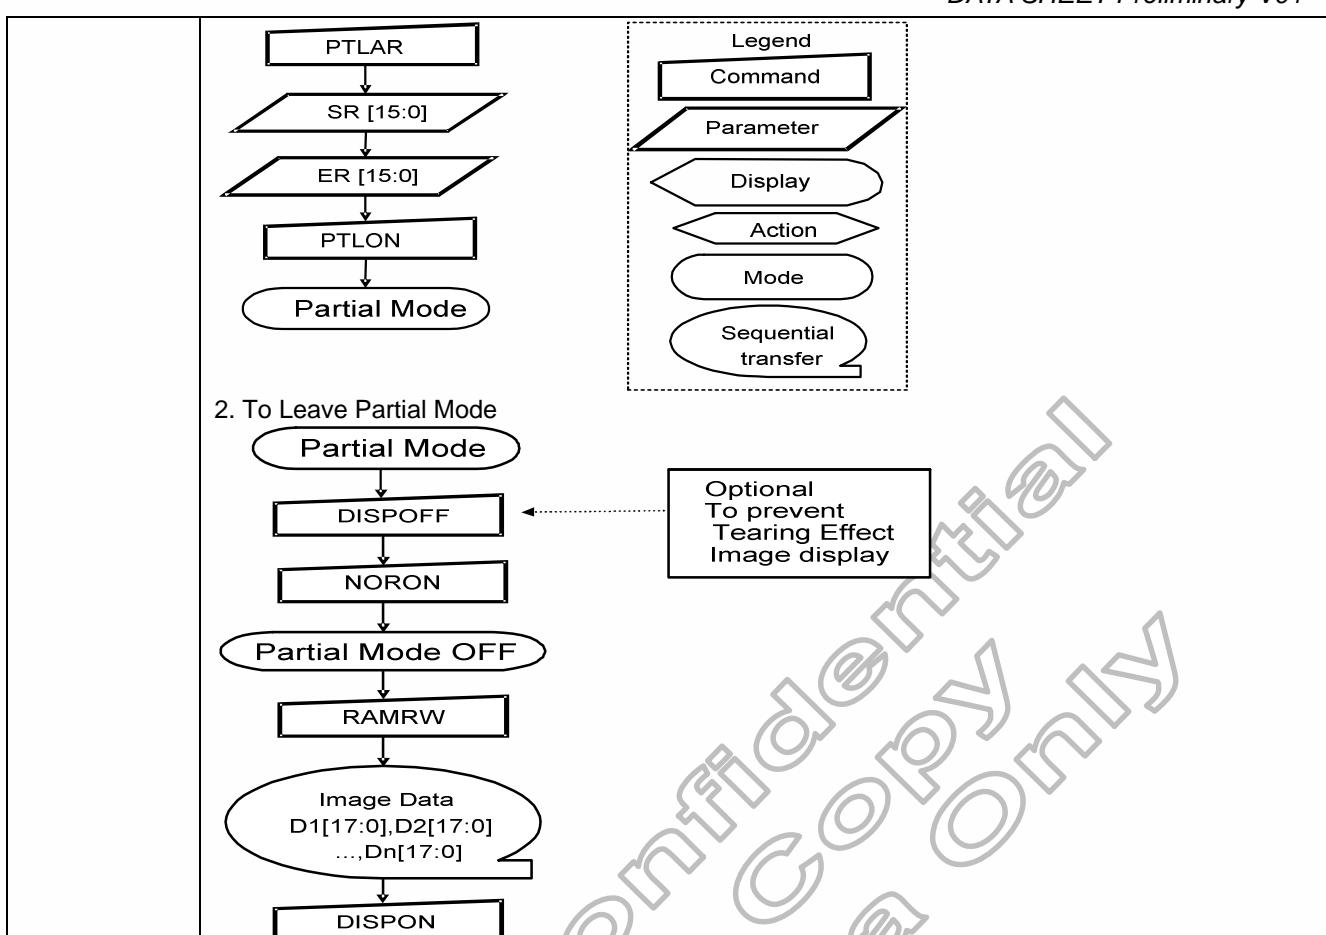


6.3.26 Vertical Scrolling Definition (33h)

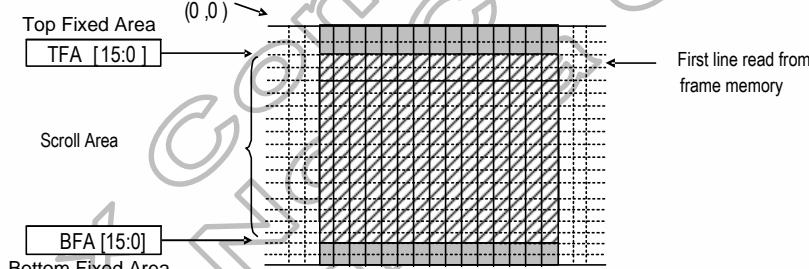
VSCRDEF (Vertical Scrolling Definition)													
33 H	DNC	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	1	↑	0	0	1	1	0	0	1	1	33	
1 st parameter	1	1	↑	TFA 15	TFA 14	TFA 13	TFA 12	TFA 11	TFA 10	TFA 9	TFA 8	00..A2	
2 nd parameter	1	1	↑	TFA 7	TFA 6	TFA 5	TFA 4	TFA 3	TFA 2	TFA 1	TFA 0		
3 rd parameter	1	1	↑	VSA 15	VSA 14	VSA 13	VSA 12	VSA 11	VSA 10	VSA 9	VSA 8	00..A2	
4 th parameter	1	1	↑	VSA 7	VSA 6	VSA 5	VSA 4	VSA 3	VSA 2	VSA 1	VSA 0		
5 th parameter	1	1	↑	BFA 15	BFA 14	BFA 13	BFA 12	BFA 11	BFA 10	BFA 9	BFA 8	00..A2	
6 th parameter	1	1	↑	BFA 7	BFA 6	BFA 5	BFA 4	BFA 3	BFA 2	BFA 1	BFA 0		
Description	<p>This command defines the Vertical Scrolling Area of the display. When MADCTL B4=0</p> <p>The 1st & 2nd parameter TFA[15..0] describes the Top Fixed Area (in No. of lines from Top of the Frame Memory and Display).</p> <p>The 3rd & 4th parameter VSA[15..0] describes the height of the Vertical Scrolling Area (in No. of lines of the Frame Memory [not the display] from the Vertical Scrolling Start Address). The first line read from Frame Memory appears immediately after the bottom most line of the Top Fixed Area.</p> <p>The 5th & 6th parameter BFA[15..0] describes the Bottom Fixed Area (in No. of lines from Bottom of the Frame Memory and Display).</p> <p>TFA, VSA and BFA refer to the Frame Memory Line Pointer.</p>  <p>The diagram illustrates the vertical scrolling areas. It shows a grid divided into three main sections: Top Fixed Area (TFA), Scroll Area, and Bottom Fixed Area (BFA). The Top Fixed Area is at the top, defined by TFA[15:0]. The Bottom Fixed Area is at the bottom, defined by BFA[15:0]. The middle section is the Scroll Area. A point (0,0) is marked at the top-left corner of the scroll area. An arrow points from TFA[15:0] to the top boundary of the scroll area. Another arrow points from BFA[15:0] to the bottom boundary of the scroll area. An arrow points from the label 'First line read from frame memory' to the bottom-most line of the scroll area.</p>												
Restriction	<p>The condition is (TFA+VSA+BFA)=162, otherwise Scrolling mode is undefined.</p> <p>In Vertical Scroll Mode, MADCTL B5 should be set to '0' – this only affects the Frame Memory Write.</p>												

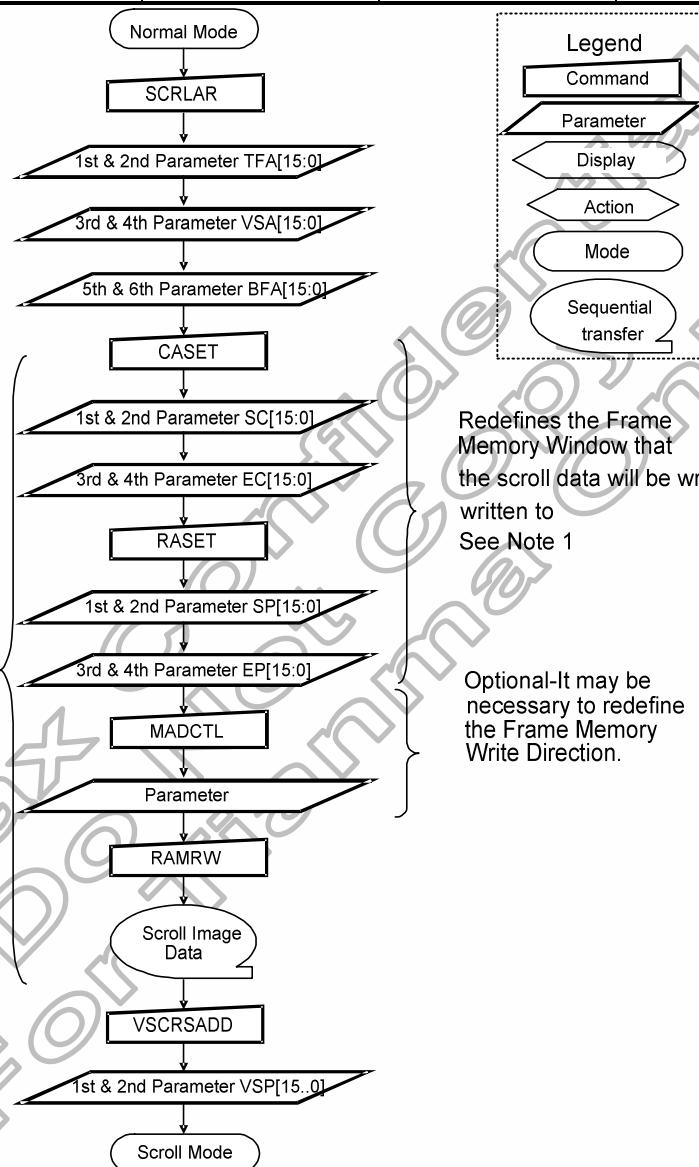Register Availability	Status	Availability	
	Normal Mode On, Idle Mode Off, Sleep Out	Yes	
	Normal Mode On, Idle Mode On, Sleep Out	Yes	
	Partial Mode On, Idle Mode Off, Sleep Out	Yes	
	Partial Mode On, Idle Mode On, Sleep Out	Yes	
Default	Sleep In or Booster Off	Yes	
	Status	Default Value	
	Power On Sequence	TFA[15..0]=0000	VSA[15..0]=00A2 BFA[15..0]=0000
	S/W Reset	TFA[15..0]=0000	VSA[15..0]=00A2 BFA[15..0]=0000
Flow Charts	 <p>Legend</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer <p>Only required for non-rolling scrolling</p> <p>Redefines the Frame Memory Window that the scroll data will be written to written to See Note 1</p> <p>Optional-It may be necessary to redefine the Frame Memory Write Direction.</p> <p>Note The Frame Memory Window size must be defined correctly otherwise undesirable image will be displayed.</p>		


2. Continuous Scroll:

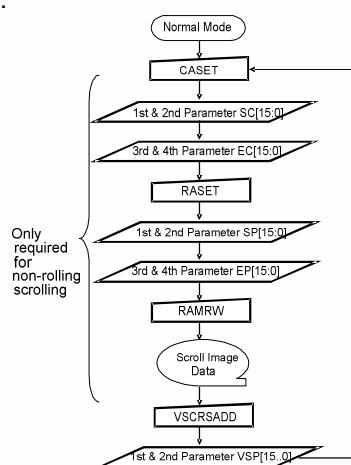



3. To Leave Vertical Scroll Mode:

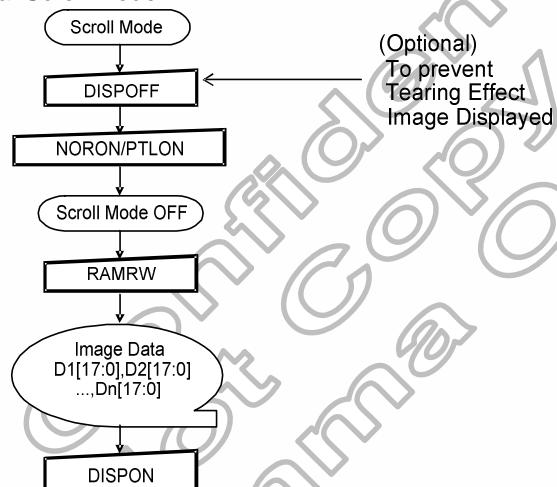




6.3.27 Tearing Effect Line Off (34h)

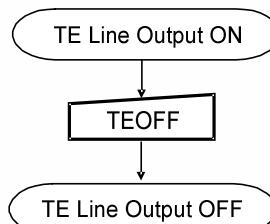
34 H	TEOFF (Tearing Effect Line OFF)												
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	0	0	1	1	0	1	0	0	34	
Description	This command is used to turn OFF (Active Low) the Tearing Effect output signal from the TE signal line.												
Restriction	This command has no effect when Tearing Effect output is already OFF.												
Register Availability	Status		Availability										
	Normal Mode On, Idle Mode Off, Sleep Out		Yes										
	Normal Mode On, Idle Mode On, Sleep Out		Yes										
	Partial Mode On, Idle Mode Off, Sleep Out		Yes										
	Partial Mode On, Idle Mode On, Sleep Out		Yes										
Default	Status		Default Value										
	Power On Sequence		Off										
	S/W Reset		Off										
Flow Chart	 <pre> graph TD A([TE Line Output ON]) --> B[TEOFF] B --> C([TE Line Output OFF]) </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 												

6.3.28 Tearing Effect Line On (35h)


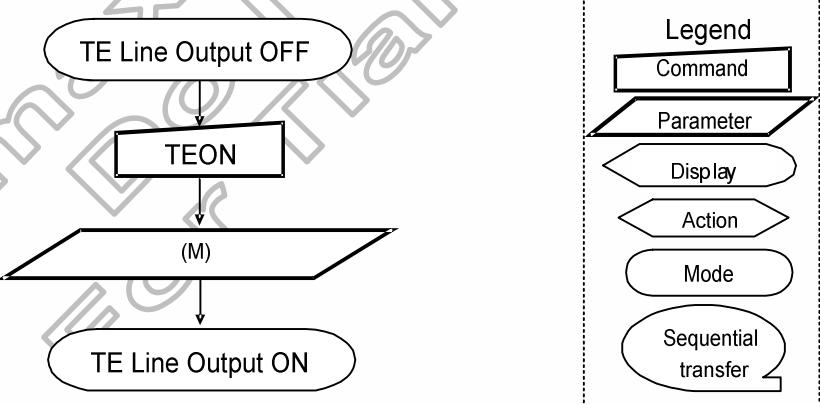
35 H		TEON (Tearing Effect Line ON)																					
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command	0	↑	1	0	0	1	1	0	1	0	1	35											
Parameter	1	↑	1	-	-	-	-	-	-	-	M	-											
Description	<p>This command is used to turn ON the Tearing Effect output signal from the TE signal line. This output is not affected by changing MADCTL bit B4. The Tearing Effect Line On has one parameter which describes the mode of the Tearing Effect Output Line. (X=Don't Care).</p> <p>When M=0:</p> <p>The Tearing Effect Output line consists of V-Blanking information only:</p>  <p>Vertical Time Scale _____</p> <p>t_vdl</p> <p>vdh</p> <p>When M=1:</p> <p>The Tearing Effect Output Line consists of both V-Blanking and H-Blanking information:</p>  <p>Vertical Time Scale _____</p> <p>t_vdl</p> <p>vdh</p> <p>Note: During Sleep In Mode with Tearing Effect Line On, Tearing Effect Output pin will be active Low.</p>																						
Restriction	This command has no effect when Tearing Effect output is already ON.																						
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes
Status	Availability																						
Normal Mode On, Idle Mode Off, Sleep Out	Yes																						
Normal Mode On, Idle Mode On, Sleep Out	Yes																						
Partial Mode On, Idle Mode Off, Sleep Out	Yes																						
Partial Mode On, Idle Mode On, Sleep Out	Yes																						
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>Off</td> </tr> <tr> <td>S/W Reset</td> <td>Off</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	Off	S/W Reset	Off				
Status	Default Value																						
Power On Sequence	Off																						
S/W Reset	Off																						
Flow Chart	 <p>Legend</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer <pre> graph TD A([TE Line Output OFF]) --> B[TEON] B --> C[/\ (M) /\] C --> D([TE Line Output ON]) </pre>																						

6.3.29 Memory Access Control (36h)

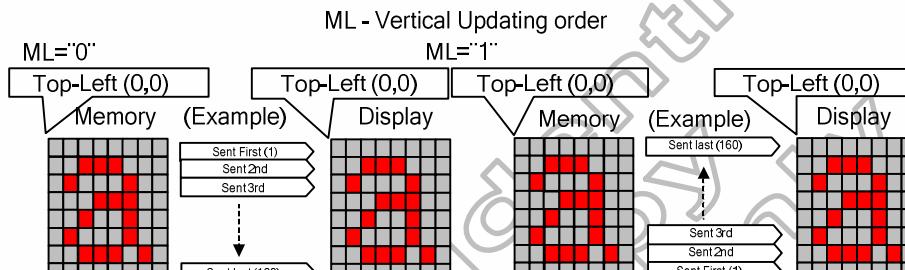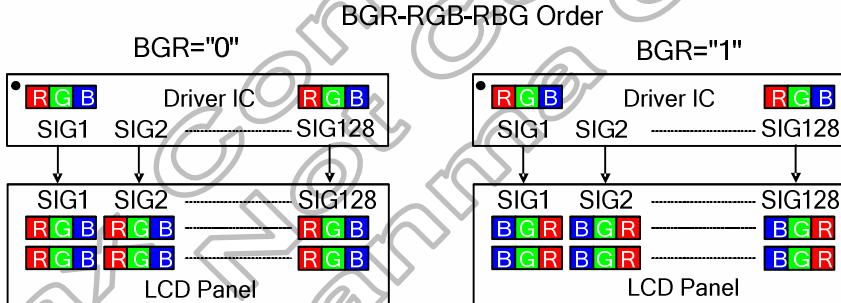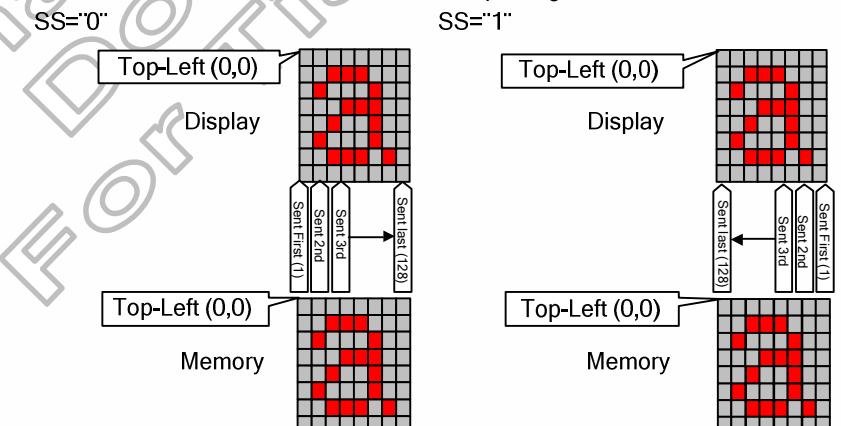
36 H	MADCTL (Memory Access Control)																													
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																		
Command	0	↑	1	0	0	1	1	0	1	1	0	36																		
1st parameter	1	↑	1	MY	MX	MV	ML	BGR	SS	-	-	XX																		
This command defines read/write scanning direction of frame memory. This command makes no change on the other driver status. Bit Assignment <table border="1"> <thead> <tr> <th>BIT</th><th>NAME</th><th>DESCRIPTION</th></tr> </thead> <tbody> <tr> <td>MY</td><td>PAGE ADDRESS ORDER</td><td rowspan="3">These 3 bits controls MCU to memory write/read direction.</td></tr> <tr> <td>MX</td><td>COLUMN ADDRESS ORDER</td></tr> <tr> <td>MV</td><td>PAGE/COLUMN SELECTION</td></tr> <tr> <td>ML</td><td>Vertical ORDER</td><td>LCD vertical refresh direction control</td></tr> <tr> <td>BGR</td><td>RGB-BGR ORDER</td><td>Color selector switch control (0=RGB color filter panel, 1=BGR color filter panel)</td></tr> <tr> <td>SS</td><td>Horizontal ORDER</td><td>LCD horizontal refresh direction control</td></tr> </tbody> </table>												BIT	NAME	DESCRIPTION	MY	PAGE ADDRESS ORDER	These 3 bits controls MCU to memory write/read direction.	MX	COLUMN ADDRESS ORDER	MV	PAGE/COLUMN SELECTION	ML	Vertical ORDER	LCD vertical refresh direction control	BGR	RGB-BGR ORDER	Color selector switch control (0=RGB color filter panel, 1=BGR color filter panel)	SS	Horizontal ORDER	LCD horizontal refresh direction control
BIT	NAME	DESCRIPTION																												
MY	PAGE ADDRESS ORDER	These 3 bits controls MCU to memory write/read direction.																												
MX	COLUMN ADDRESS ORDER																													
MV	PAGE/COLUMN SELECTION																													
ML	Vertical ORDER	LCD vertical refresh direction control																												
BGR	RGB-BGR ORDER	Color selector switch control (0=RGB color filter panel, 1=BGR color filter panel)																												
SS	Horizontal ORDER	LCD horizontal refresh direction control																												
Description	  																													
Restriction	D1 and D0 are set to '00' internally. D2 is implemented if the LCD is updating pixel-by pixel. D2 is set to '0' internally if the LCD is updating line-by-line.																													
Register Availability	<table border="1"> <thead> <tr> <th>Status</th><th>Availability</th></tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes										
Status	Availability																													
Normal Mode On, Idle Mode Off, Sleep Out	Yes																													
Normal Mode On, Idle Mode On, Sleep Out	Yes																													
Partial Mode On, Idle Mode Off, Sleep Out	Yes																													

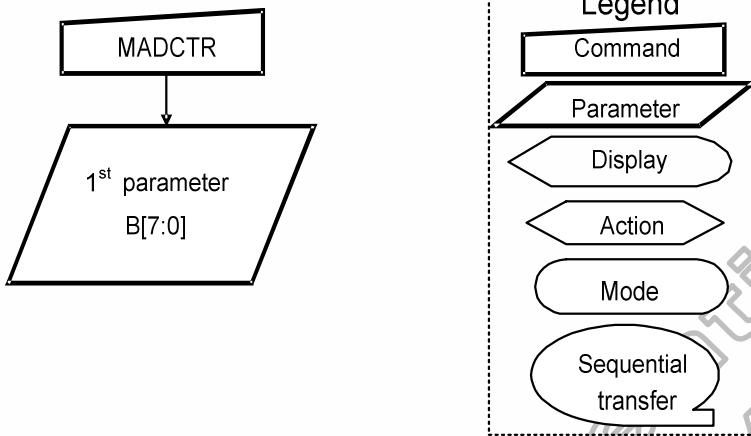	Sleep In or Booster Off	Yes
Default	Status Power On Sequence S/W Reset	Default Value MY=0,MX=0,MV=0,ML=0,BGR=0,SS=0,B1=0,B0=0 No Change
Flow Chart	 <pre> graph TD MADCTR[MADCTR] --> B["1st parameter B[7:0]"] style B fill:none,stroke:none subgraph Legend [Legend] Command[Command] Parameter[Parameter] Display[Display] Action[Action] Mode[Mode] Sequential[Sequential transfer] end </pre>	



6.3.30 Vertical Scrolling Start Address (37h)

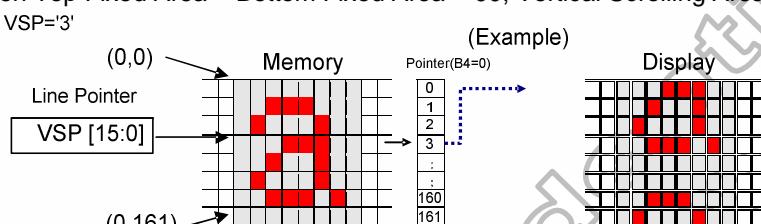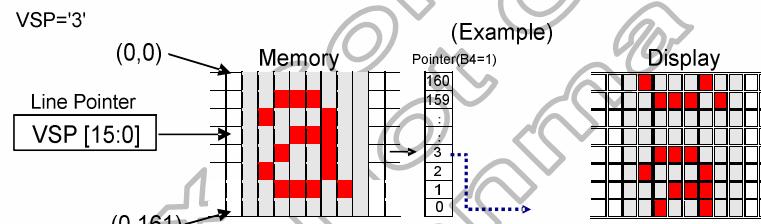37 H VSCRSADD (Vertical Scrolling Start Address)																							
	NRD DNC	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	10	↑	0	0	1	1	0	1	1	1	37												
1 st parameter	11	↑	VSP 15	VSP 14	VSP 13	VSP 12	VSP 11	VSP 10	VSP 9	VSP 8	00 .. A1												
2 nd parameter	11	↑	VSP 7	VSP 6	VSP 5	VSP 4	VSP 3	VSP 2	VSP 1	VSP 0													
Description	<p>This command is used together with Vertical Scrolling Definition (33h). These two commands describe the scrolling area and the scrolling mode.</p> <p>The Vertical Scrolling Start Address command has one parameter which describes the address of the line in the Frame Memory that will be written as the first line after the last line of the Top Fixed Area on the display as illustrated below:-</p> <p>When MADCTL B4=0</p> <p>Example:</p> <p>When Top Fixed Area = Bottom Fixed Area = 00, Vertical Scrolling Area = 162 and VSP='3'</p>  <p>When MADCTL B4=1</p> <p>Example:</p> <p>When Top Fixed Area = Bottom Fixed Area = 00, Vertical Scrolling Area = 162 and VSP='3'</p>  <p>. When new Pointer position and Picture Data are sent, the result on the display will happen at the next Panel Scan to avoid tearing effect.</p> <p>. VSP refers to the Frame Memory line Pointer.</p>																						
Restriction	Since the value of the Vertical Scrolling Start Address is absolute (with reference to the Frame Memory), it must not enter the fixed area (defined by Vertical Scrolling Definition (33h)) – otherwise undesirable image will be displayed on the Panel.																						
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>No</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>No</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>											Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	No	Partial Mode On, Idle Mode On, Sleep Out	No	Sleep In or Booster Off	Yes
Status	Availability																						
Normal Mode On, Idle Mode Off, Sleep Out	Yes																						
Normal Mode On, Idle Mode On, Sleep Out	Yes																						
Partial Mode On, Idle Mode Off, Sleep Out	No																						
Partial Mode On, Idle Mode On, Sleep Out	No																						
Sleep In or Booster Off	Yes																						
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>0000</td> </tr> <tr> <td>S/W Reset</td> <td>0000</td> </tr> <tr> <td>H/W Reset</td> <td>0000</td> </tr> </tbody> </table>											Status	Default Value	Power On Sequence	0000	S/W Reset	0000	H/W Reset	0000				
Status	Default Value																						
Power On Sequence	0000																						
S/W Reset	0000																						
H/W Reset	0000																						
Flow Chart	See Vertical Scrolling Definition (33h) description.																						


6.3.31 Idle Mode Off (38h)

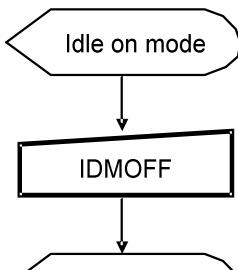38 H	IDMOFF (Idle mode off)												
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	0	0	1	1	1	0	0	0	38	
Parameter	NO PARAMETER												
Description	This command is used to recover from Idle mode on.												
Restriction	In the idle off mode, LCD can display maximum 262,144 colors. See also section 8.6.2.												
Register Availability	Status		Availability										
	Normal Mode On, Idle Mode Off, Sleep Out		Yes										
	Normal Mode On, Idle Mode On, Sleep Out		Yes										
	Partial Mode On, Idle Mode Off, Sleep Out		Yes										
	Partial Mode On, Idle Mode On, Sleep Out		Yes										
Default	Status		Default Value										
	Power On Sequence		Idle off mode										
	S/W Reset		Idle off mode										
Flow Chart	 <pre> graph TD A([Idle on mode]) --> B[IDMOFF] B --> C([Idle off mode]) </pre> <p>Legend</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 												


6.3.32 Idle Mode On (39h)

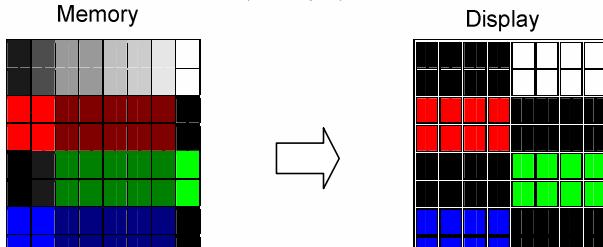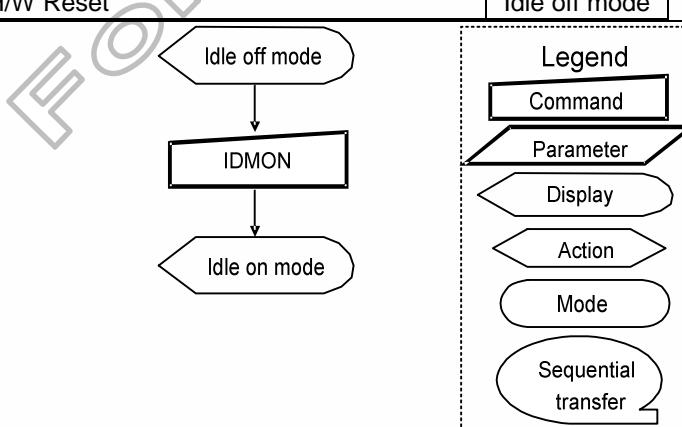39 H	IDMON (Idle mode on)																																															
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																				
Command	0	↑	1	0	0	1	1	1	0	0	1	39																																				
Parameter	NO PARAMETER																																															
Description	<p>This command is used to enter into Idle mode on. In the idle on mode, color expression is reduced. The primary and the secondary colors using MSB of each R, G and B in the Frame Memory, 8 color depth data is displayed.</p> <p>(Example)</p>  <p>Memory</p> <p>Display</p> <p>Memory contents vs. Display Color</p> <table border="1"> <thead> <tr> <th></th> <th>R4 R3 R2 R1 R0</th> <th>G5 G4 G3 G2 G1 G0</th> <th>B4 B3 B2 B1 B0</th> </tr> </thead> <tbody> <tr> <td>Black</td> <td>0XXXX</td> <td>0XXXXXX</td> <td>0XXXXXX</td> </tr> <tr> <td>Blue</td> <td>0XXXX</td> <td>0XXXXXX</td> <td>1XXXXXX</td> </tr> <tr> <td>Red</td> <td>1XXXX</td> <td>0XXXXXX</td> <td>0XXXXXX</td> </tr> <tr> <td>Magenta</td> <td>1XXXX</td> <td>0XXXXXX</td> <td>1XXXXXX</td> </tr> <tr> <td>Green</td> <td>0XXXX</td> <td>1XXXXXX</td> <td>0XXXXXX</td> </tr> <tr> <td>Cyan</td> <td>0XXXX</td> <td>1XXXXXX</td> <td>1XXXXXX</td> </tr> <tr> <td>Yellow</td> <td>1XXXX</td> <td>1XXXXXX</td> <td>0XXXXXX</td> </tr> <tr> <td>White</td> <td>1XXXX</td> <td>1XXXXXX</td> <td>1XXXXXX</td> </tr> </tbody> </table> <p>X=don't care</p> <p>See also section 8.6.2.</p>													R4 R3 R2 R1 R0	G5 G4 G3 G2 G1 G0	B4 B3 B2 B1 B0	Black	0XXXX	0XXXXXX	0XXXXXX	Blue	0XXXX	0XXXXXX	1XXXXXX	Red	1XXXX	0XXXXXX	0XXXXXX	Magenta	1XXXX	0XXXXXX	1XXXXXX	Green	0XXXX	1XXXXXX	0XXXXXX	Cyan	0XXXX	1XXXXXX	1XXXXXX	Yellow	1XXXX	1XXXXXX	0XXXXXX	White	1XXXX	1XXXXXX	1XXXXXX
	R4 R3 R2 R1 R0	G5 G4 G3 G2 G1 G0	B4 B3 B2 B1 B0																																													
Black	0XXXX	0XXXXXX	0XXXXXX																																													
Blue	0XXXX	0XXXXXX	1XXXXXX																																													
Red	1XXXX	0XXXXXX	0XXXXXX																																													
Magenta	1XXXX	0XXXXXX	1XXXXXX																																													
Green	0XXXX	1XXXXXX	0XXXXXX																																													
Cyan	0XXXX	1XXXXXX	1XXXXXX																																													
Yellow	1XXXX	1XXXXXX	0XXXXXX																																													
White	1XXXX	1XXXXXX	1XXXXXX																																													
Restriction	This command has no effect when module is already in idle on mode.																																															
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes																								
Status	Availability																																															
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																															
Normal Mode On, Idle Mode On, Sleep Out	Yes																																															
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																															
Partial Mode On, Idle Mode On, Sleep Out	Yes																																															
Sleep In or Booster Off	Yes																																															
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>Idle off mode</td> </tr> <tr> <td>S/W Reset</td> <td>Idle off mode</td> </tr> <tr> <td>H/W Reset</td> <td>Idle off mode</td> </tr> </tbody> </table>												Status	Default Value	Power On Sequence	Idle off mode	S/W Reset	Idle off mode	H/W Reset	Idle off mode																												
Status	Default Value																																															
Power On Sequence	Idle off mode																																															
S/W Reset	Idle off mode																																															
H/W Reset	Idle off mode																																															
Flow Chart	 <pre> graph TD A([Idle off mode]) --> B[IDMON] B --> C([Idle on mode]) style B fill:none,stroke:none style C fill:none,stroke:none </pre> <p>Legend</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																																															

6.3.33 Interface Pixel Format (3Ah)

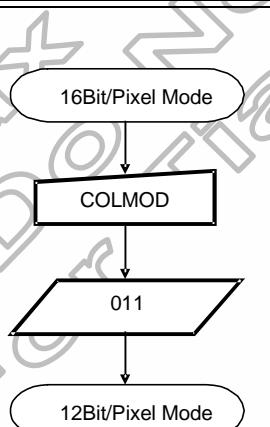3A H		COLMOD (Interface Pixel Format)																					
	DNC	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command	0	1	↑	0	0	1	1	1	0	1	0	3A											
1 st parameter	1	1	↑	XX	XX	XX	XX	XX	CSEL2	CSEL1	CSEL0	011,101											
Description	This command is used to define the format of RGB picture data, which is to be transferred via the MCU Interface. The formats are shown in the table:-																						
	Interface Format (system interface)				CSEL2	CSEL1	CSEL0																
	Not Defined				0	0	0																
	Not Defined				0	0	1																
	Not Defined				0	1	0																
	12 Bit/Pixel				0	1	1																
	Not Defined				1	0	0																
	16 Bit/Pixel				1	0	1																
	18 Bit/Pixel				1	1	0																
	Not Defined				1	1	1																
Note: In 8, 12, 16 &18 Bit/Pixel mode, the LUT is applied to transfer data into the Frame Memory.																							
Restriction	There is no visible effect until the Frame Memory is written to.																						
Register Availability	Status			Availability																			
	Normal Mode On, Idle Mode Off, Sleep Out			Yes																			
	Normal Mode On, Idle Mode On, Sleep Out			Yes																			
	Partial Mode On, Idle Mode Off, Sleep Out			Yes																			
	Partial Mode On, Idle Mode On, Sleep Out			Yes																			
Default	Status			Default Value																			
	Power On Sequence			18 Bit/Pixel																			
	S/W Reset			No Change																			
	H/W Reset			18 Bit/Pixel																			
Flow Chart	Example:																						
	 <pre> graph TD A([16Bit/Pixel Mode]) --> B[COLMOD] B --> C[/011/] C --> D([12Bit/Pixel Mode]) </pre> <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																						



6.3.34 Read ID1 (DAh)

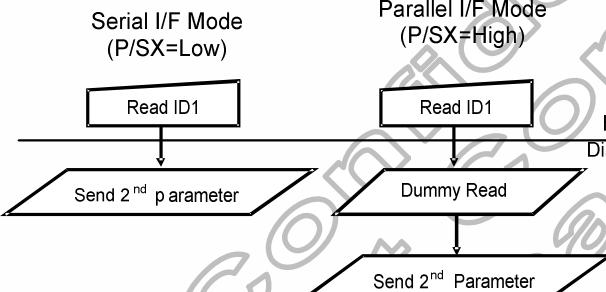DA H	RDID1 (Read ID1)																					
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX										
Command	0	↑	1	1	1	0	1	1	0	1	0	DA										
1 st parameter	1	1	↑	-	-	-	-	-	-	-	-	-										
2 nd parameter	1	1	↑	Module's manufacturer[7:0]								xx										
Description	This read byte identifies the LCD module's manufacturer. It is specified by Nokia and for xx is defined as xxHEX.																					
Restriction																						
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes
Status	Availability																					
Normal Mode On, Idle Mode Off, Sleep Out	Yes																					
Normal Mode On, Idle Mode On, Sleep Out	Yes																					
Partial Mode On, Idle Mode Off, Sleep Out	Yes																					
Partial Mode On, Idle Mode On, Sleep Out	Yes																					
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>xxHEX</td> </tr> <tr> <td>S/W Reset</td> <td>xxHEX</td> </tr> </tbody> </table>												Status	Default Value	Power On Sequence	xxHEX	S/W Reset	xxHEX				
Status	Default Value																					
Power On Sequence	xxHEX																					
S/W Reset	xxHEX																					
Flow Chart	 <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																					

6.3.35 Read ID2 (DBh)

DB H	RDID2 (Read ID2)																																
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX																					
Command	0	↑	1	1	1	0	1	1	0	1	1	DB																					
1 st parameter	1	1	↑	-	-	-	-	-	-	-	-	-																					
2 nd parameter	1	1	↑	-	V6	V5	V4	V3	V2	V1	V0	-																					
Description	This read byte is used to track the LCD module/driver version. It is defined by display supplier (with Nokia's agreement) and changes each time a revision is made to the display, material or construction specifications. See Table: <table border="1"> <thead> <tr> <th>ID Byte Value V[7:0]</th> <th>Version</th> <th>Changes</th> </tr> </thead> <tbody> <tr> <td>80h</td> <td></td> <td></td> </tr> <tr> <td>81h</td> <td></td> <td></td> </tr> <tr> <td>82h</td> <td></td> <td></td> </tr> <tr> <td>83h</td> <td></td> <td></td> </tr> <tr> <td>84h</td> <td></td> <td></td> </tr> <tr> <td>85h</td> <td></td> <td></td> </tr> </tbody> </table>												ID Byte Value V[7:0]	Version	Changes	80h			81h			82h			83h			84h			85h		
ID Byte Value V[7:0]	Version	Changes																															
80h																																	
81h																																	
82h																																	
83h																																	
84h																																	
85h																																	
Restrictions																																	
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> </tbody> </table>			Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes																				
Status	Availability																																
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																
Normal Mode On, Idle Mode On, Sleep Out	Yes																																
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																
Partial Mode On, Idle Mode On, Sleep Out	Yes																																
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>See Description</td> </tr> <tr> <td>S/W Reset</td> <td>See Description</td> </tr> </tbody> </table>		Status	Default Value	Power On Sequence	See Description	S/W Reset	See Description																									
Status	Default Value																																
Power On Sequence	See Description																																
S/W Reset	See Description																																
Flow Chart	<p>Serial I/F Mode (P/SX=Low)</p> <p>Parallel I/F Mode (P/SX=High)</p> <p>Host</p> <p>Display</p> <p>Legend</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																																

6.3.36 Read ID3 (DCh)

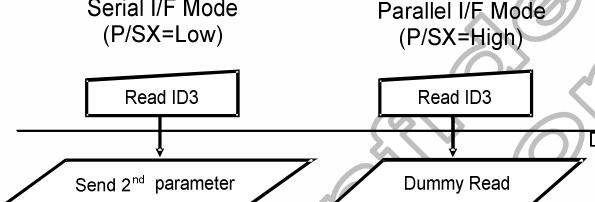DC H		RDID3 (Read ID3)																			
	DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	1	1	0	1	1	1	0	0	DC									
1 st parameter	1	1	↑	-	-	-	-	-	-	-	-	-									
2 nd parameter	1	1	↑	LCD module/driver ID [7:0]								-									
Description	This read byte identifies the LCD module/driver. It is specified by Nokia and for this LCD project module is defined as xxHEX.																				
Restrictions																					
Register Availability	Status			Availability																	
	Normal Mode On, Idle Mode Off, Sleep Out			Yes																	
	Normal Mode On, Idle Mode On, Sleep Out			Yes																	
	Partial Mode On, Idle Mode Off, Sleep Out			Yes																	
Default	Partial Mode On, Idle Mode On, Sleep Out			Yes																	
	Status			Default Value																	
	Power On Sequence			TBDHEX																	
		S/W Reset			TBDHEX																
Flow Chart	<p>Serial I/F Mode (P/SX=Low)</p>  <p>Parallel I/F Mode (P/SX=High)</p>  <p>Legend:</p> <ul style="list-style-type: none"> Command Parameter Display Action Mode Sequential transfer 																				

6.4 Himax Command

6.4.1 SETOSC: Set Internal Oscillator (B0h)

B0 H		SETOSC(Set Internal Oscillator)																																															
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																			
Command		0	↑	1	--	1	0	1	1	0	0	0	0	B0																																			
1st parameter		1	↑	1	--	CADJ[3:0]			UADJ[2:0]			-	--																																				
2nd parameter		1	↑	1	--	--	--	--	--	--	RADJ[2:0]			--																																			
3 rd parameter		1	↑	1	--	--	--	--	OSC_EN_C ON(0)	--	--	OSC_EN(1)	--	--																																			
Description	This command is used to set internal oscillator related setting. OSC_EN: Enable internal oscillator, High active CADJ[3:0], RADJ[3:0]: for Internal test. UADJ[2:0]: Internal oscillator frequency, default is 1.5MHz.																																																
	<table border="1"> <thead> <tr> <th>UADJ2</th> <th>UADJ1</th> <th>UADJ0</th> <th>frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>128%</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>119%</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>110%</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>100%</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>91%</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>81%</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>71%</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>61%</td></tr> </tbody> </table>														UADJ2	UADJ1	UADJ0	frequency	0	0	0	128%	0	0	1	119%	0	1	0	110%	0	1	1	100%	1	0	0	91%	1	0	1	81%	1	1	0	71%	1	1	1
UADJ2	UADJ1	UADJ0	frequency																																														
0	0	0	128%																																														
0	0	1	119%																																														
0	1	0	110%																																														
0	1	1	100%																																														
1	0	0	91%																																														
1	0	1	81%																																														
1	1	0	71%																																														
1	1	1	61%																																														
OSC_EN_CON: OSC_EN status control bit,1: OSC_EN in fix state,0: OSC_EN in changed state																																																	
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																																																
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Sleep In</td><td>Yes</td></tr> </tbody> </table>														Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes																							
Status	Availability																																																
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																																
Normal Mode On, Idle Mode On, Sleep Out	Yes																																																
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																																
Partial Mode On, Idle Mode On, Sleep Out	Yes																																																
Sleep In	Yes																																																
<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr><td>Power On Sequence</td><td>OSC_TEST=0; OSC_EN=0, CADJ[3:0]=OTP value, RADJ=OTP value, UADJ[2:0]=3'b011.</td></tr> <tr><td>S/W Reset</td><td>OSC_EN=0h, if OPT is programmed, CADJ[3:0] =OTP value, RADJ=OTP value, else no change</td></tr> <tr><td>H/W Reset</td><td>OSC_TEST=0; OSC_EN=0, CADJ[3:0] =OTP value, RADJ=OTP value, UADJ[2:0]=3'b011</td></tr> </tbody> </table>														Status	Default Value	Power On Sequence	OSC_TEST=0; OSC_EN=0, CADJ[3:0]=OTP value, RADJ=OTP value, UADJ[2:0]=3'b011.	S/W Reset	OSC_EN=0h, if OPT is programmed, CADJ[3:0] =OTP value, RADJ=OTP value, else no change	H/W Reset	OSC_TEST=0; OSC_EN=0, CADJ[3:0] =OTP value, RADJ=OTP value, UADJ[2:0]=3'b011																												
Status	Default Value																																																
Power On Sequence	OSC_TEST=0; OSC_EN=0, CADJ[3:0]=OTP value, RADJ=OTP value, UADJ[2:0]=3'b011.																																																
S/W Reset	OSC_EN=0h, if OPT is programmed, CADJ[3:0] =OTP value, RADJ=OTP value, else no change																																																
H/W Reset	OSC_TEST=0; OSC_EN=0, CADJ[3:0] =OTP value, RADJ=OTP value, UADJ[2:0]=3'b011																																																
Flow Chart																																																	

6.4.2 SETPOWER: Set Power (B1h)

B1 H		SETPOWER(Set power related setting)																																												
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																
Command	0	↑	1	--	1	0	1	1	0	0	0	1	0	B1																																
1 st parameter	1	↑	1	--	GASE NB(0)	--	--	PON(0)	DK(1)	--	--	STB(0)	--																																	
2 nd parameter	1	↑	1	--	--	--	--	--	--	AP[2:0](000)				--																																
3 rd parameter	1	↑	1	--	--	--	--	--	--	VC1[2:0](110)				--																																
4 th parameter	1	↑	1	--	--	--	--	--	VRH[3:0](0100)				--																																	
5 th parameter	1	↑	1	--	BT[3:0](0011)				--	--	--	--	--	--																																
6 th parameter	1	↑	1	--	--	--	FS11	FS10	--	--	FS01	FS00	--																																	
7 th parameter	1	↑	1	--	N_DC[7:0]								--																																	
8 th parameter	1	↑	1	--	E_DC[7:0]								--																																	
9 th parameter	1	↑	1	--	--	--	--	--	--	--	--	--	DCCL K_SY NC(1)	--																																
Description	<p>GASENB: This stands for abnormal power-off supervise function when the power is off. It's for monitoring power status by NISD pad when GASENB is set to 0.</p> <p>PON: Specify on/off control of step-up circuit 2 for VGH, VGL voltage generation. For detail, see the Power Supply Setting Sequence.</p> <table border="1"> <thead> <tr> <th>PON</th> <th>Operation of step-up circuit 2</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>OFF</td> </tr> <tr> <td>1</td> <td>ON</td> </tr> </tbody> </table> <p>DK: Specify on/off control of step-up circuit 1 for VLCD voltage generation. For detail, see the Power Supply Setting Sequence.</p> <table border="1"> <thead> <tr> <th>DK</th> <th>Operation of step-up circuit 1</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>ON</td> </tr> <tr> <td>1</td> <td>OFF</td> </tr> </tbody> </table> <p>STB: When STB = "1", the HX8353-C into the standby mode, where all display operation stops, suspend all the internal operations including the internal R-C oscillator. During the standby mode, only the following process can be executed.</p> <ul style="list-style-type: none"> a. Exit the Standby mode (STB = "0") , b. Start the oscillation <p>In the standby mode, the GRAM data and register content may be lost. For preventing this, they have to reset again after the standby mode cancel.</p> <p>AP(2-0):</p> <p>Adjust the amount of current driving for the operational amplifier in the power supply circuit. When the amount of fixed current is increased, the LCD driving capacity and the display quality are high, but the current consumption is increased. This is a tradeoff, Adjust the fixed current by considering both the display quality and the current consumption. AP(2-0) can be set as "000" when display is off, the current consumption can be reduced by stopping the operations of operational amplifier and step-up circuit.</p> <table border="1"> <thead> <tr> <th>AP2</th> <th>AP1</th> <th>AP0</th> <th>Constant Current of Operational Amplifier</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>Power Circuit Off</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>Ignore</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>Ignore</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>Ignore</td> </tr> </tbody> </table>														PON	Operation of step-up circuit 2	0	OFF	1	ON	DK	Operation of step-up circuit 1	0	ON	1	OFF	AP2	AP1	AP0	Constant Current of Operational Amplifier	0	0	0	Power Circuit Off	0	0	1	Ignore	0	1	0	Ignore	0	1	1	Ignore
PON	Operation of step-up circuit 2																																													
0	OFF																																													
1	ON																																													
DK	Operation of step-up circuit 1																																													
0	ON																																													
1	OFF																																													
AP2	AP1	AP0	Constant Current of Operational Amplifier																																											
0	0	0	Power Circuit Off																																											
0	0	1	Ignore																																											
0	1	0	Ignore																																											
0	1	1	Ignore																																											

1	0	0		1
1	0	1		1.25
1	1	0		1.5
1	1	1		Ignore

VC1(2-0):

Specify the ratio for VLCD voltage adjusting.

VC12	VC11	VC10	VLCD
0	0	0	5.47
0	0	1	5.29
0	1	0	5.12
0	1	1	4.95
1	0	0	4.76
1	0	1	4.59
1	1	0	4.46
1	1	1	4.23

VRH(3-0):

Set the magnification of amplification for VREG1 voltage for gamma voltage setting. It allows magnify the amplification of VREF from 2.8 to 4.8 times.

VRH3	VRH2	VRH1	VRH0	VREG1
0	0	0	0	VREFx 1.87
0	0	0	1	VREF x 2.00
0	0	1	0	VREF x 2.13
0	0	1	1	VREF x 2.20
0	1	0	0	VREF x 2.27
0	1	0	1	VREF x 2.33
0	1	1	0	VREF x 2.4
0	1	1	1	VREF x 2.47
1	0	0	0	VREF x 2.53
1	0	0	1	VREF x 2.6
1	0	1	0	VREF x 2.67
1	0	1	1	VREF x 2.8
1	1	0	0	VREF x 2.93
1	1	0	1	VREF x 3.07
1	1	1	0	VREF x 3.2
1	1	1	1	Inhibited

Note: VREF is the internal reference voltage equals to 1.8V.

BT(3-0):

Switch the output factor of step-up circuit 2 for VGH and VGL voltage generation. The LCD drive voltage level can be selected according to the characteristic of liquid crystal which panel used. Lower amplification of the step-up circuit consumes less current and then the power consumption can be reduced.

BT3	BT2	BT1	BT0	VCL	VGH	VGL		Capacitor Connection Pin
						VCOMG=1	VCOMG=0	
0	0	0	0	-1x VDD	VLCD x 3 [x 6]	-(VLCDx2)+VCL [x -5]	-(VLCDx2) [x -4]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	0	0	1	-1x VDD	VLCD x 3 [x 6]	-(VLCDx2) [x -4]	-(VLCDx2) [x -4]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	0	1	0	-1x VDD	VLCD x 3 [x 6]	-(VLCDx2)+VDD [x -3]	-(VLCDx2)+VDD [x -3]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B

0	0	1	1	-1x VDD	VLCD x 3+VDD [x 5]	-(VLCDX2)+VCL [x -5]	-(VLCDX2) [x -4]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	1	0	0	-1x VDD	VLCD x 3+VDD [x 5]	-(VLCDX2) [x -4]	-(VLCDX2) [x -4]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	1	0	1	-1x VDD	VLCD x 3+VDD [x 5]	-(VLCDX2)+VDD [x -3]	-(VLCDX2)+VDD [x -3]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	1	1	0	-1x VDD	VLCD X 2 [x 4]	-(VLCDX2) [x -4]	-(VLCDX2) [x -4]	VCL, VGH, VGL C11 A/B, C21 A/B, C22A/B
0	1	1	1	-1x VDD			Inhibited	
1	0	0	0	-1x VDD	VLCD X 2 [x 4]	-(VLCDX1)+VCL [x-3]	-(VLCDX1) [x-2]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	0	0	1	-1x VDD	VLCD X 2 [x 4]	-(VLCDX1) [x-2]	-(VLCDX1) [x-2]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	0	1	0	-1x VDD	VLCD X 2 [x 4]	-(VLCDX1)+VDD [x-1]	-(VLCDX1)+VDD [x-1]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	0	1	1	-1x VDD	VLCD X 2 +VDD [x3]	-(VLCDX1)+VCL [x-3]	-(VLCDX1) [x-2]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	1	0	0	-1x VDD	VLCD X1 +VDD [x3]	-(VLCDX1) [x-2]	-(VLCDX1) [x-2]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	1	0	1	-1x VDD	VLCDX1+VDD [x3]	-(VLCDX1)+VDD [x-1]	-(VLCDX1)+VDD [x-1]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	1	1	0	-1x VDD	VLCDX1 [x2]	-(VLCDX1) [x-2]	-(VLCDX1) [x-2]	VCL, VGH, VGL C11 A/B, C21 A/B,
1	1	1	1				Inhibited	

Note: 1. The conditions of VLCD \leq 6V, VCL \leq -3.3V, VGH-VGL \leq 32V must be satisfied.

2. If VCOMG=0, VCL output is floating.

3. C22 option : VGH and VGL can share the same pump capacitor when operate on special pumping condition \rightarrow BT[3:0]=1XXX (On this condition, C22 can be removed).

FS0(1-0):

Set the operating frequency of the step-up circuit 1 and extra step-up circuit 1 for VLCD voltage generation. When using the higher frequency, the driving ability of the step-up circuit and the display quality are high, but the current consumption is increased. The tradeoff is between the display quality and the current consumption.

DCDCf = DC / DC converter operating frequency

FS01	FS0	Operation Frequency of Step-up Circuit 1 and Extra Step-up circuit 1
0	0	DCDCf / 1
0	1	DCDCf / 2
1	0	DCDCf / 4
1	1	DCDCf / 8

FS1(1-0):

Set the operating frequency of the step-up circuit 2 and 3 for VGH, VGL and VCL voltage generation. When using the higher frequency, the driving ability of the step-up circuit and the display quality are high, but the current consumption is increased. The tradeoff is between the display quality and the current consumption.

DCDCf = DC / DC converter operating frequency

FS11	FS10	Operation Frequency of Step-up Circuit 2 , Step-up Circuit 3
0	0	DCDCf / 1
0	1	DCDCf / 2
1	0	DCDCf / 4
1	1	DCDCf / 8

Note: Ensure that the operation frequency of step-up circuit 1 \geq step-up circuit 2

N_DC: Normal mode

E_DC: Idle mode

	DCCLK_SYNC: Internal use, not open.												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	<table border="1"> <tr> <th>Status</th><th>Availability</th></tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												
<table border="1"> <tr> <th>Status</th><th>Default Value</th></tr> <tr> <td>Power On Sequence</td><td>GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1</td></tr> <tr> <td>S/W Reset</td><td>GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1</td></tr> <tr> <td>H/W Reset</td><td>GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1</td></tr> </table>	Status	Default Value	Power On Sequence	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1	S/W Reset	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1	H/W Reset	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1					
Status	Default Value												
Power On Sequence	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1												
S/W Reset	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1												
H/W Reset	GASENB=1'b0, PON=1'b0, XDK=1'b0, VLCD_TRI=1'b0, STB=1'b1, AP[2:0]=3'b000, VC1[2:0]=3'b110, VC3[2:0]=3'b110, VRH[3:0]=4'b0010, BT[3:0]=4'b0011, FS1[1:0]=2'b01, FS0[1:0]=2'b00, N_DC[7:0]=8'b0110_1110, PE_DC[7:0]=8'b0110_1110, E_DC[7:0]=8'b0110_1110, PI_PRE_REFRESH[1:0]=2'b00, BLANK_DIV[3:0]=4'b0000, DCCLK_SYNC=1'b1												
Flow Chart													

6.4.3 SETDISP: Set Display Related Register (B2h)

B2 H	SETDISP(Set display related register)																
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX				
Command	0	↑	1	--	1	0	1	1	0	0	1	0	B2				
1 st parameter	1	↑	1	--	PT[1:0]		GON	DTE	D[1:0]		--	--	--				
2 nd parameter	1	↑	1	--	--	--	--	--	N_BP[3:0]				--				
3 rd parameter	1	↑	1	--	--	--	--	--	N_FP[3:0]				--				
4 th parameter	1	↑	1	SAP[7:0]									--				
5 th parameter	1	↑	1	EQS[7:0]									--				
6 th parameter	1	↑	1	EQP[7:0]									--				
7 th parameter	1	↑	1	--	--	--	--	--	GEN_OFF[3:0]				--				
8 th parameter	1	↑	1	--	--	--	PTG[1:0]		ISC[3:0]				--				
9 th parameter	1	↑	1	SAP_I[7:0]									--				
10 th parameter	1	↑	1	--	--	--	--	--	--	--	--	OPTION_DIS_P(0)	--				

This command is used to set display related register

D1-0: When D1 = 1, display is on; when D1 = 0, display is off. When display is off, the display data is retained in the GRAM, and can be instantly displayed by setting D1 = 1. When D1= 0, the display is off with the entire source outputs are set to the VSSD level. Because of this, the HX8353-C can control the charging current for the LCD with AC driving. Control the display on/off while control GON and DTE. When D1-0 = 01, the internal display of the HX8353-C is performed although the actual display is off. When D1-0 = 00, the internal display operation halts and the display is off.

D1	D0	Source Output	HX8353-C Internal Display Operations	Gate-Driver Control Signals (CPV, FLM, M)
0	0	VSSD	Halt	Halt
0	1	VSSD	Operate	Operate
1	0	Non-lit display	Operate	Operate
1	1	Display	Operate	Operate

Description

GON, DTE:

GON	DTE	Gate Output
0	X	VGH
1	0	VGL
1	1	VGH/VGL

PT[1:0] : Non-display area source output control

Source Output Level			
REV	GRAM	Display area	Non-display Area

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

-P.173-

February, 2008

	Data			PT1-0=(0,*)		PT1-0=(1,0)		PT1-0=(1,1)	
		VCOM = "L"	VCOM = "H"	VCOM = "L"	VCOM = "H"	VCOM = "L"	VCOM = "H"	VCOM = "L"	VCOM = "H"
0	18'h00000	V63	V0	V63	V0	VSSD	VSSD	Hi-z	Hi-z
	18'h3FFFF	V0	V63						
1	18'h00000	V0	V63	V63	V0	VSSD	VSSD	Hi-z	Hi-z
	18'h3FFFF	V63	V0						

FP[3:0]: Specify the amount of scan line for front porch (FP).

BP[3:0]: Specify the amount of scan line for back porch(BP).

N_FPN[3:0], N_BPN[3:0]: Normal mode

FP3	FP2	FP1	FP0	Number of FP Line	Number of BP Line
BP3	BP2	BP1	BP0		
0	0	0	0	Ignore	
0	0	0	1	Ignore	
0	0	1	0	2 lines	
0	0	1	1	3 lines	
0	1	0	0	4 lines	
0	1	0	1	5 lines	
0	1	1	0	6 lines	
0	1	1	1	7 lines	
1	0	0	0	8 lines	
1	0	0	1	9 lines	
1	0	1	0	10 lines	
1	0	1	1	11 lines	
1	1	0	0	12 lines	
1	1	0	1	13 lines	
1	1	1	0	14 lines	
1	1	1	1	Ignore	

Operation Mode	BP	FP
System Interface	≥2 lines	≥2 lines

EQS[7:0]: Internal use, not open.

EQP[7:0]: Internal use, not open.

GEN_OFF: Internal use, not open.

PTG[1:0]: Specify the scan mode of gate driver in non-display area.

PTG1	PTG0	Gate Outputs in Non-display Area
0	0	Normal Drive
0	1	Fixed VGL
1	0	Interval scan
1	1	Ignore

ISC[3:0]: Specify the scan cycle of gate driver when PTG1-0=10 in non-display area. Then scan cycle is set to an odd number from 0~31. The polarity is inverted every scan cycle.

ISC3	ISC2	ISC1	ISC0	Scan Cycle	f _{FLM} = 60Hz
0	0	0	0	0 frame	-

0	0	0	1	3 frames	50 ms
0	0	1	0	5 frames	84 ms
0	0	1	1	7 frames	117 ms
0	1	0	0	9 frames	150 ms
0	1	0	1	11 frames	184 ms
0	1	1	0	13 frames	217 ms
0	1	1	1	15 frames	251 ms
1	0	0	0	17 frames	284 ms
1	0	0	1	19 frames	317 ms
1	0	1	0	21 frames	351 ms
1	0	1	1	23 frames	384 ms
1	1	0	0	25 frames	418 ms
1	1	0	1	27 frames	451 ms
1	1	1	0	29 frames	484 ms
1	1	1	1	31 frames	518 ms

SAP[7:0]: Normal mode, Internal use, not open.

SAP_I[7:0]: Idle mode, Internal use, not open.

Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	<table border="1"> <thead> <tr> <th>Status</th><th>Availability</th></tr> </thead> <tbody> <tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Sleep In</td><td>Yes</td></tr> </tbody> </table>		Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability													
Normal Mode On, Idle Mode Off, Sleep Out	Yes													
Normal Mode On, Idle Mode On, Sleep Out	Yes													
Partial Mode On, Idle Mode Off, Sleep Out	Yes													
Partial Mode On, Idle Mode On, Sleep Out	Yes													
Sleep In	Yes													
Default	<table border="1"> <thead> <tr> <th>Status</th><th>Default Value</th></tr> </thead> <tbody> <tr> <td>Power On Sequence</td><td>PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10</td></tr> <tr> <td>S/W Reset</td><td>PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10</td></tr> <tr> <td>H/W Reset</td><td>PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10</td></tr> </tbody> </table>		Status	Default Value	Power On Sequence	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10	S/W Reset	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10	H/W Reset	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10				
Status	Default Value													
Power On Sequence	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10													
S/W Reset	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10													
H/W Reset	PT[1:0]=2'b00, GON=1, DTE=0, D1-0=2'b00, N_FP[3:0]=4'b1101, N_BP[3:0]=4'b1010, PE_FP[3:0]=4'b1101, PE_BP[3:0]=4'b1010, E_FP[3:0]=4'b1101, E_BP[3:0]=4'b1010, SAP[7:0]=8'b0001_0100, EQS=8'b0001_1001, EQP=8'b0001_1001, GEN_OFF=8'b0001_0100, PTG[1:0]=2'b10, ISC[3:0]=4'b010, SAP_I[7:0]= 8'b0000_1010,, PTG[1:0]=2'b10													
Flow Chart														

6.4.4 SETLUT: Set LUT Enable Related Register (B3h)

B3 H		SETLUT(Set LUT Enable Related Register)																							
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command		0	↑	1	--	1	0	1	1	0	1	0	1	B3											
1 st parameter		1	↑	1	--	--	--	LUT_ENB	--	--	--	--	--	--											
Description	This command is used to set LUTenable related register LUT_ENB: Enable/Disable the look up table. 0: Enable the look up table. 1: Disable the look up table.																								
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>LUT_EN=OTP value,</td> </tr> <tr> <td>S/W Reset</td> <td>LUT_EN= No change ,</td> </tr> <tr> <td>H/W Reset</td> <td>LUT_EN=OTP value,</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	LUT_EN=OTP value,	S/W Reset	LUT_EN= No change ,	H/W Reset	LUT_EN=OTP value,				
Status	Default Value																								
Power On Sequence	LUT_EN=OTP value,																								
S/W Reset	LUT_EN= No change ,																								
H/W Reset	LUT_EN=OTP value,																								
Flow Chart																									

6.4.5 SETCYC: Set Display Waveform Cycles (B4h)

B4H	SETCYC(Set display waveform cycles)												
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	0	1	1	0	1	1	1	B4
1 st parameter	1	↑	1	--			N_RTN[3:0]		--		N_NW[2:0]		--
2 nd parameter	1	↑	1	--			E_RTN[3:0]		--		E_NW[2:0]		--
3 rd parameter	1	↑	1	--	--	--	DIV_E[1:0]		--	--	--	--	--
4 th parameter	1	↑	1	--				SON[7:0]					--
5 th parameter	1	↑	1	--				GDON[7:0]					--
6 th parameter	1	↑	1	--				GDOF[7:0]					--

This command is used to set display waveform cycles

NW[2:0]: Frame Inversion and N-line inversion control

NW[2:0]	Inversion Type
0	Frame inversion
1	1-line inversion
2	2-line inversion
3	3-line inversion
..	..
7	7-line inversion

RTN[3:0]: Set the 1-line period in a clock unit.

Clock cycles=1/internal operation clock frequency

RTN[3:0]	Clock Cycles per Line
4'b0000	138
4'b0001	139
4'b0010	140
4'b0011	141
....	...
4'b1110	153
4'b1111	154

Description

DIV_E[1:0]: The division ratio of clocks for internal operation (DIV1-0). Internal operations are base on the clocks which are frequency divided according to the value of DIV1-0. Frame frequency can be adjusted along with the 1H period (RTN3-0). When the drive line count is changed, the frame frequency must be also adjusted.

fosc = R-C oscillation frequency

DIV_E1	DIV_E0	Division Ratio	Internal Operation Clock Frequency
0	0	1	fosc / 1
0	1	2	fosc / 2
1	0	4	fosc / 4
1	1	8	fosc / 8

Formula for the Frame Frequency:

Frame frequency = fosc/(RTN × DIV × (NL+BP+FP)) [HZ]
fosc: RC oscillation frequency

RTN bit: Clocks per line

DIV bit: Division ratio


NL: The number of lines

FP: Number of lines for front porch

BP: Number of lines for back porch

BP+FP≤16

The HX8353-C can control the display operation period time for LCD panel driving as follow:

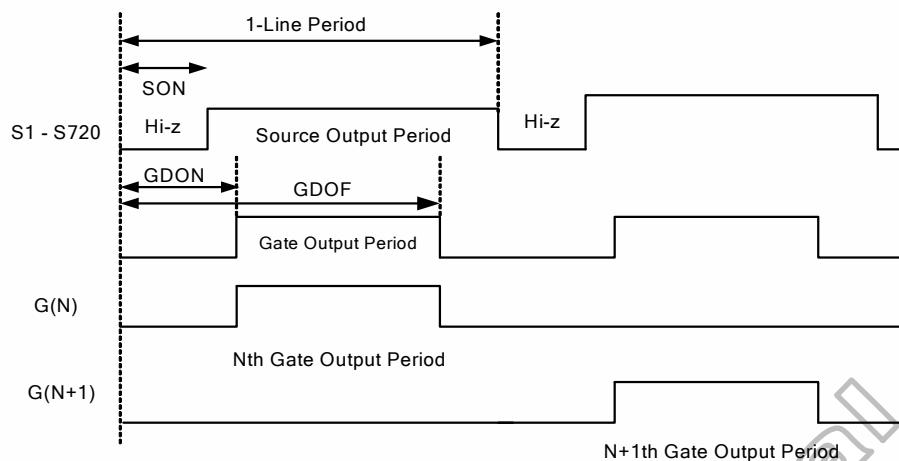

SON7-0: Specify the valid source output start time in 1-line driving period. The period time is defined as SYSCLK clock number. (Please note that the setting "00h" and "01h" is inhibited).

GDON7-0: Specify the valid gate output start time in 1-line driving period. The period time is defined as SYSCLK clock number in internal clock display mode. The period time is defined as setting value x 8 DOTCLK clock number in external clock display mode. (Please note that the setting "00h", "01h", "02h" is inhibited).

GDOF7-0: Specify the gate output end time in 1-line driving period. The period time is defined as SYSCLK clock number in internal clock display mode. The period time is defined as setting value x 8 DOTCLK clock number in external clock display mode. (Please note that the GDOF7-0 ≤ HCK-1).

Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	<table border="1"> <thead> <tr> <th>Status</th><th>Availability</th></tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </tbody> </table>	Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability												
Normal Mode On, Idle Mode Off, Sleep Out	Yes												
Normal Mode On, Idle Mode On, Sleep Out	Yes												
Partial Mode On, Idle Mode Off, Sleep Out	Yes												
Partial Mode On, Idle Mode On, Sleep Out	Yes												
Sleep In	Yes												
Default	<table border="1"> <thead> <tr> <th>Status</th><th>Default Value</th></tr> </thead> <tbody> <tr> <td>Power On Sequence</td><td>N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.</td></tr> <tr> <td>S/W Reset</td><td>N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]= No change, DIV_PE[1:0]= No change , DIV_N[1:0]=No change, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.</td></tr> <tr> <td>H/W Reset</td><td>N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.</td></tr> </tbody> </table>	Status	Default Value	Power On Sequence	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.	S/W Reset	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]= No change, DIV_PE[1:0]= No change , DIV_N[1:0]=No change, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.	H/W Reset	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.				
Status	Default Value												
Power On Sequence	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.												
S/W Reset	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]= No change, DIV_PE[1:0]= No change , DIV_N[1:0]=No change, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.												
H/W Reset	N_NW[3:0]=3'b001, N_RTN[3:0]=4'b1101, PE_NW[3:0]=3'b000, E_NW[3:0]=3'b000, E_RTN[3:0]=4'b1101, DIV_E[1:0]=OTP Value, DIV_PE[1:0]=OTP Value , DIV_N[1:0]=OTP Value, SON[7:0]=8'h19, GDON[7:0]=8'h1E, GDOF[7:0]=8'h78.												
Flow Chart													

6.4.6 SETBGP: Set BGP Voltage (B5h)

B5 H	SETBGP(Set Band Gap Voltage)																																													
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																	
Command	0	↑	1	--	1	0	1	1	1	0	0	1	B5																																	
1st parameter	1	↑	1	--	--	--	--	--	BGP[3:0]			-																																		
Description	This command is used to set BandGap Voltage																																													
	BGP[3:0]: band gap voltage control																																													
	<table border="1"> <thead> <tr> <th>BGP[3:0]</th> <th>VREF output</th> </tr> </thead> <tbody> <tr><td>4'b0000</td><td>X 0.936</td></tr> <tr><td>4'b0001</td><td>X 0.944</td></tr> <tr><td>4'b0010</td><td>X 0.952</td></tr> <tr><td>4'b0011</td><td>X 0.96</td></tr> <tr><td>4'b0100</td><td>X 0.968</td></tr> <tr><td>4'b0101</td><td>X 0.976</td></tr> <tr><td>4'b0110</td><td>X 0.984</td></tr> <tr><td>4'b0111</td><td>X 0.992</td></tr> <tr><td>4'b1000</td><td>X 1.000</td></tr> <tr><td>4'b1001</td><td>X 1.008</td></tr> <tr><td>4'b1010</td><td>X 1.016</td></tr> <tr><td>4'b1011</td><td>X 1.024</td></tr> <tr><td>4'b1100</td><td>X 1.032</td></tr> <tr><td>4'b1101</td><td>X 1.040</td></tr> <tr><td>4'b1110</td><td>X 1.048</td></tr> <tr><td>4'b1111</td><td>X 1.056</td></tr> </tbody> </table>													BGP[3:0]	VREF output	4'b0000	X 0.936	4'b0001	X 0.944	4'b0010	X 0.952	4'b0011	X 0.96	4'b0100	X 0.968	4'b0101	X 0.976	4'b0110	X 0.984	4'b0111	X 0.992	4'b1000	X 1.000	4'b1001	X 1.008	4'b1010	X 1.016	4'b1011	X 1.024	4'b1100	X 1.032	4'b1101	X 1.040	4'b1110	X 1.048	4'b1111
BGP[3:0]	VREF output																																													
4'b0000	X 0.936																																													
4'b0001	X 0.944																																													
4'b0010	X 0.952																																													
4'b0011	X 0.96																																													
4'b0100	X 0.968																																													
4'b0101	X 0.976																																													
4'b0110	X 0.984																																													
4'b0111	X 0.992																																													
4'b1000	X 1.000																																													
4'b1001	X 1.008																																													
4'b1010	X 1.016																																													
4'b1011	X 1.024																																													
4'b1100	X 1.032																																													
4'b1101	X 1.040																																													
4'b1110	X 1.048																																													
4'b1111	X 1.056																																													
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																																													
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr><td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr><td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr><td>Sleep In</td><td>Yes</td></tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes																					
Status	Availability																																													
Normal Mode On, Idle Mode Off, Sleep Out	Yes																																													
Normal Mode On, Idle Mode On, Sleep Out	Yes																																													
Partial Mode On, Idle Mode Off, Sleep Out	Yes																																													
Partial Mode On, Idle Mode On, Sleep Out	Yes																																													
Sleep In	Yes																																													
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr><td>Power On Sequence</td><td>BGP[3:0]=OTP value</td></tr> <tr><td>S/W Reset</td><td>BGP[3:0]=No Change</td></tr> <tr><td>H/W Reset</td><td>BGP[3:0]=OTP value</td></tr> </tbody> </table>													Status	Default Value	Power On Sequence	BGP[3:0]=OTP value	S/W Reset	BGP[3:0]=No Change	H/W Reset	BGP[3:0]=OTP value																									
Status	Default Value																																													
Power On Sequence	BGP[3:0]=OTP value																																													
S/W Reset	BGP[3:0]=No Change																																													
H/W Reset	BGP[3:0]=OTP value																																													
Flow Chart																																														

6.4.7 SETVCOM: Set VCOM Voltage (B6h)

B6 H	SETVCOM(Set VCOM Voltage)																																																																																																																																																																																																																											
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX																																																																																																																																																																																																															
Command	0	↑	1	--	1	0	1	1	0	1	1	0	B6																																																																																																																																																																																																															
1 st parameter	1	↑	1	--	VCO MG	--	--	--	--	--	--	--	--																																																																																																																																																																																																															
2 nd parameter	1	↑	1	--	--	VCMN[6:0]						--																																																																																																																																																																																																																
3 rd parameter	1	↑	1	--	--	--	--	--	VDV[4:0]				--																																																																																																																																																																																																															
Description	This command is used to set VCOM Voltage include VCOM Low and VCOM High Voltage VCOMG: When VCOMG = 1, VCOML voltage can output to negative voltage (1.0V ~ -VDD +0.5V). When VCOMG = 0, VCOML voltage becomes VSSA and stops the amplifier of the negative voltage. Therefore, low power consumption is accomplished. VDV(4-0): Specify the VCOM amplitude factors for panel common driving (VCOML = VCOMH – VCOM amplitude). It is possible to setup from 0.6 to 1.23 times of VREG1. When VCOMG0 = 0, the VDV(4-0) setup is invalid and VCOML is output VSSA.																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>VDV4</th> <th>VDV3</th> <th>VDV2</th> <th>VDV1</th> <th>VDV0</th> <th>VCOM Amplitude</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td><td>VREG1*0.6</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>VREG1*0.63</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>VREG1*0.66</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td><td>VREG1*0.69</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>VREG1*0.72</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>1</td><td>VREG1*0.75</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td><td>VREG1*0.78</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>1</td><td>VREG1*0.81</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>VREG1*0.84</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>VREG1*0.87</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>VREG1*0.9</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>1</td><td>VREG1*0.93</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>VREG1*0.96</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>VREG1*0.99</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>0</td><td>VREG1*1.02</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>1</td><td>Inhibit</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>VREG1*1.05</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>1</td><td>VREG1*1.08</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>0</td><td>VREG1*1.11</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>VREG1*1.14</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td><td>0</td><td>VREG1*1.17</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>VREG1*1.2</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td><td>0</td><td>VREG1*1.23</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td><td>1</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td><td>1</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td><td>0</td><td>Inhibit</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>Inhibit</td></tr> </tbody> </table> <p>Note: VCOML >= (VCL + 0.3), VCOMH <= (VLCD - 0.3) when set VDV[4:0]</p> <p>VCMN(6-0): Set the VCOMH voltage on normal mode. It is possible to amplify from 0.4 to 0.98 times of VREG1 voltage.</p> <table border="1"> <thead> <tr> <th>VCMN6</th> <th>VCMN5</th> <th>VCMN4</th> <th>VCMN3</th> <th>VCMN2</th> <th>VCMN1</th> <th>VCMN0</th> <th>VCOMH</th> </tr> </thead> </table>														VDV4	VDV3	VDV2	VDV1	VDV0	VCOM Amplitude	0	0	0	0	0	VREG1*0.6	0	0	0	0	1	VREG1*0.63	0	0	0	1	0	VREG1*0.66	0	0	0	1	1	VREG1*0.69	0	0	1	0	0	VREG1*0.72	0	0	1	0	1	VREG1*0.75	0	0	1	1	0	VREG1*0.78	0	0	1	1	1	VREG1*0.81	0	1	0	0	0	VREG1*0.84	0	1	0	0	1	VREG1*0.87	0	1	0	1	0	VREG1*0.9	0	1	0	1	1	VREG1*0.93	0	1	1	0	0	VREG1*0.96	0	1	1	0	1	VREG1*0.99	0	1	1	1	0	VREG1*1.02	0	1	1	1	1	Inhibit	1	0	0	0	0	VREG1*1.05	1	0	0	0	1	VREG1*1.08	1	0	0	1	0	VREG1*1.11	1	0	0	1	1	VREG1*1.14	1	0	1	0	0	VREG1*1.17	1	0	1	0	1	VREG1*1.2	1	0	1	1	0	VREG1*1.23	1	0	1	1	1	Inhibit	1	1	0	0	0	Inhibit	1	1	0	0	1	Inhibit	1	1	0	1	0	Inhibit	1	1	0	1	1	Inhibit	1	1	1	0	0	Inhibit	1	1	1	0	1	Inhibit	1	1	1	1	0	Inhibit	1	1	1	1	1	Inhibit	VCMN6	VCMN5	VCMN4	VCMN3	VCMN2	VCMN1	VCMN0	VCOMH
VDV4	VDV3	VDV2	VDV1	VDV0	VCOM Amplitude																																																																																																																																																																																																																							
0	0	0	0	0	VREG1*0.6																																																																																																																																																																																																																							
0	0	0	0	1	VREG1*0.63																																																																																																																																																																																																																							
0	0	0	1	0	VREG1*0.66																																																																																																																																																																																																																							
0	0	0	1	1	VREG1*0.69																																																																																																																																																																																																																							
0	0	1	0	0	VREG1*0.72																																																																																																																																																																																																																							
0	0	1	0	1	VREG1*0.75																																																																																																																																																																																																																							
0	0	1	1	0	VREG1*0.78																																																																																																																																																																																																																							
0	0	1	1	1	VREG1*0.81																																																																																																																																																																																																																							
0	1	0	0	0	VREG1*0.84																																																																																																																																																																																																																							
0	1	0	0	1	VREG1*0.87																																																																																																																																																																																																																							
0	1	0	1	0	VREG1*0.9																																																																																																																																																																																																																							
0	1	0	1	1	VREG1*0.93																																																																																																																																																																																																																							
0	1	1	0	0	VREG1*0.96																																																																																																																																																																																																																							
0	1	1	0	1	VREG1*0.99																																																																																																																																																																																																																							
0	1	1	1	0	VREG1*1.02																																																																																																																																																																																																																							
0	1	1	1	1	Inhibit																																																																																																																																																																																																																							
1	0	0	0	0	VREG1*1.05																																																																																																																																																																																																																							
1	0	0	0	1	VREG1*1.08																																																																																																																																																																																																																							
1	0	0	1	0	VREG1*1.11																																																																																																																																																																																																																							
1	0	0	1	1	VREG1*1.14																																																																																																																																																																																																																							
1	0	1	0	0	VREG1*1.17																																																																																																																																																																																																																							
1	0	1	0	1	VREG1*1.2																																																																																																																																																																																																																							
1	0	1	1	0	VREG1*1.23																																																																																																																																																																																																																							
1	0	1	1	1	Inhibit																																																																																																																																																																																																																							
1	1	0	0	0	Inhibit																																																																																																																																																																																																																							
1	1	0	0	1	Inhibit																																																																																																																																																																																																																							
1	1	0	1	0	Inhibit																																																																																																																																																																																																																							
1	1	0	1	1	Inhibit																																																																																																																																																																																																																							
1	1	1	0	0	Inhibit																																																																																																																																																																																																																							
1	1	1	0	1	Inhibit																																																																																																																																																																																																																							
1	1	1	1	0	Inhibit																																																																																																																																																																																																																							
1	1	1	1	1	Inhibit																																																																																																																																																																																																																							
VCMN6	VCMN5	VCMN4	VCMN3	VCMN2	VCMN1	VCMN0	VCOMH																																																																																																																																																																																																																					

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

	0	0	0	0	0	0	VREG1 * 0.4
	0	0	0	0	0	1	VREG1 * 0.405
	0	0	0	0	1	0	VREG1 * 0.41
	0	0	0	0	1	1	VREG1 * 0.415
	0	0	0	0	1	0	VREG1 * 0.42
	0	0	0	0	1	0	VREG1 * 0.425
	0	0	0	0	1	1	VREG1 * 0.43
	0	0	0	0	1	1	VREG1 * 0.435
	0	0	0	1	0	0	VREG1 * 0.44
	0	0	0	1	0	1	VREG1 * 0.445
	0	0	0	1	0	1	VREG1 * 0.45
	0	0	0	1	0	1	VREG1 * 0.455
	0	0	0	1	1	0	VREG1 * 0.46
	0	0	0	1	1	0	VREG1 * 0.465
	0	0	0	1	1	1	VREG1 * 0.47
	0	0	0	1	1	1	VREG1 * 0.475
	0	0	1	0	0	0	VREG1 * 0.48
	0	0	1	0	0	1	VREG1 * 0.485
	0	0	1	0	0	1	VREG1 * 0.49
	0	0	1	0	0	1	VREG1 * 0.495
	0	0	1	0	1	0	VREG1 * 0.5
	0	0	1	0	1	1	VREG1 * 0.505
	0	0	1	0	1	1	VREG1 * 0.51
	0	0	1	0	1	1	VREG1 * 0.515
	0	0	1	1	0	0	VREG1 * 0.52
	0	0	1	1	0	0	VREG1 * 0.525
	0	0	1	1	0	1	VREG1 * 0.53
	0	0	1	1	0	1	VREG1 * 0.535
	0	0	1	1	1	0	VREG1 * 0.54
	0	0	1	1	1	0	VREG1 * 0.545
	0	0	1	1	1	1	VREG1 * 0.55
	0	1	0	0	0	0	VREG1 * 0.56
	0	1	0	0	0	0	VREG1 * 0.565
	0	1	0	0	0	1	VREG1 * 0.57
	0	1	0	0	0	1	VREG1 * 0.575
	0	1	0	0	1	0	VREG1 * 0.58
	0	1	0	0	1	0	VREG1 * 0.585
	0	1	0	0	1	1	VREG1 * 0.59
	0	1	0	0	1	1	VREG1 * 0.595
	0	1	0	1	0	0	VREG1 * 0.6
	0	1	0	1	0	0	VREG1 * 0.605
	0	1	0	1	0	1	VREG1 * 0.61
	0	1	0	1	0	1	VREG1 * 0.615
	0	1	0	1	1	0	VREG1 * 0.62
	0	1	0	1	1	0	VREG1 * 0.625
	0	1	0	1	1	1	VREG1 * 0.63
	0	1	0	1	1	1	VREG1 * 0.635
	0	1	1	0	0	0	VREG1 * 0.64
	0	1	1	0	0	0	VREG1 * 0.645
	0	1	1	0	0	1	VREG1 * 0.65
	0	1	1	0	0	1	VREG1 * 0.655
	0	1	1	0	1	0	VREG1 * 0.66
	0	1	1	0	1	0	VREG1 * 0.665
	0	1	1	0	1	1	VREG1 * 0.67
	0	1	1	0	1	1	VREG1 * 0.675
	0	1	1	1	0	0	VREG1 * 0.68
	0	1	1	1	0	0	VREG1 * 0.685
	0	1	1	1	0	1	VREG1 * 0.69
	0	1	1	1	0	1	VREG1 * 0.695
	0	1	1	1	1	0	VREG1 * 0.7
	0	1	1	1	1	0	VREG1 * 0.705
	0	1	1	1	1	1	VREG1 * 0.71
	0	1	1	1	1	1	inhibit
	1	0	0	0	0	0	VREG1 * 0.715
	1	0	0	0	0	0	VREG1 * 0.72
	1	0	0	0	0	1	VREG1 * 0.725
	1	0	0	0	0	1	VREG1 * 0.73
	1	0	0	0	1	0	VREG1 * 0.735
	1	0	0	0	1	0	VREG1 * 0.74

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

-P.181-

February, 2008

	1	0	0	0	1	1	0	VREG1 * 0.745
	1	0	0	0	1	1	1	VREG1 * 0.75
	1	0	0	1	0	0	0	VREG1 * 0.755
	1	0	0	1	0	0	1	VREG1 * 0.76
	1	0	0	1	0	1	0	VREG1 * 0.765
	1	0	0	1	0	1	1	VREG1 * 0.77
	1	0	0	1	1	0	0	VREG1 * 0.775
	1	0	0	1	1	0	1	VREG1 * 0.78
	1	0	0	1	1	1	0	VREG1 * 0.785
	1	0	0	1	1	1	1	VREG1 * 0.79
	1	0	1	0	0	0	0	VREG1 * 0.795
	1	0	1	0	0	0	1	VREG1 * 0.8
	1	0	1	0	0	1	0	VREG1 * 0.805
	1	0	1	0	0	1	1	VREG1 * 0.81
	1	0	1	0	1	0	0	VREG1 * 0.815
	1	0	1	0	1	0	1	VREG1 * 0.82
	1	0	1	0	1	1	0	VREG1 * 0.825
	1	0	1	0	1	1	1	VREG1 * 0.83
	1	0	1	1	0	0	0	VREG1 * 0.835
	1	0	1	1	0	0	1	VREG1 * 0.84
	1	0	1	1	0	1	0	VREG1 * 0.845
	1	0	1	1	0	1	1	VREG1 * 0.85
	1	0	1	1	1	0	0	VREG1 * 0.855
	1	0	1	1	1	0	1	VREG1 * 0.86
	1	0	1	1	1	1	0	VREG1 * 0.865
	1	0	1	1	1	1	1	VREG1 * 0.87
	1	1	0	0	0	0	0	VREG1 * 0.875
	1	1	0	0	0	0	1	VREG1 * 0.88
	1	1	0	0	0	1	0	VREG1 * 0.885
	1	1	0	0	0	1	1	VREG1 * 0.89
	1	1	0	0	1	0	0	VREG1 * 0.895
	1	1	0	0	1	0	1	VREG1 * 0.9
	1	1	0	0	1	1	0	VREG1 * 0.905
	1	1	0	0	1	1	1	VREG1 * 0.91
	1	1	0	1	0	0	0	VREG1 * 0.915
	1	1	0	1	0	0	1	VREG1 * 0.92
	1	1	0	1	0	1	0	VREG1 * 0.925
	1	1	0	1	0	1	1	VREG1 * 0.93
	1	1	0	1	1	0	0	VREG1 * 0.935
	1	1	0	1	1	0	1	VREG1 * 0.94
	1	1	0	1	1	1	0	VREG1 * 0.945
	1	1	0	1	1	1	1	VREG1 * 0.95
	1	1	1	0	0	0	0	VREG1 * 0.955
	1	1	1	0	0	0	1	VREG1 * 0.96
	1	1	1	0	0	1	0	VREG1 * 0.965
	1	1	1	0	0	1	1	VREG1 * 0.97
	1	1	1	0	1	0	0	VREG1 * 0.975
	1	1	1	0	1	0	1	VREG1 * 0.98
	1	1	1	0	1	1	0	inhibit
	1	1	1	0	1	1	1	inhibit
	1	1	1	1	0	0	0	inhibit
	1	1	1	1	0	0	1	inhibit
	1	1	1	1	0	1	0	inhibit
	1	1	1	1	0	1	1	inhibit
	1	1	1	1	1	0	0	inhibit
	1	1	1	1	1	0	1	inhibit
	1	1	1	1	1	1	0	inhibit
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command							
Register Availability	Status		Availability					
	Normal Mode On, Idle Mode Off, Sleep Out		Yes					

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

	Partial Mode On, Idle Mode Off, Sleep Out	Yes		
	Partial Mode On, Idle Mode On, Sleep Out	Yes		
	Sleep In	Yes		
Default	Status	Default Value		
	Power On Sequence	VCOMG=1'b0, VDV[4:0]=OTP value, VCMN[5:0]=OTP value, VCME[5:0]=OTP value, VCMPE[5:0]=OTP value		
	S/W Reset	VCOMG=1'b0, VDV[4:0]= OTP value, VCMN[5:0]= OTP value, VCME[5:0]= OTP value, VCMPE[5:0]= OTP value		
	H/W Reset	VCOMG=1'b0, VDV[4:0]= OTP value, VCMN[5:0]= OTP value, VCME[5:0]= OTP value, VCMPE[5:0]= OTP value		
Flow Chart				

Himax Confidential
For DO Not Copy Only


6.4.8 SETGAMMA: Set Gamma Curve Related Setting (B7)

B7H		SETGAMMA1(Set Gamma Curve1 Related Setting)												
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	0	1	1	0	1	1	1	1	B7
1 st parameter	1	↑	1	--	--	MP12	MP11	MP10	--	MP02	MP01	MP00	--	
2 nd parameter	1	↑	1	--	--	MP32	MP31	MP30	--	MP22	MP21	MP20	--	
3 rd parameter	1	↑	1	--	--	MP52	MP51	MP50	--	MP42	MP41	MP40	--	
4 th parameter	1	↑	1	--	--	--	--	--	CP03	CP02	CP01	CP00	--	
5 th parameter	1	↑	1	--	CP23	CP22	CP21	CP20	CP13	CP12	CP11	CP10	--	
6 th parameter	1	↑	1	--	--	--	--	--	CP33	CP32	CP31	CP30	--	
7 th parameter	1	↑	1	--	--	--	--	--	CP43	CP42	CP41	CP40	--	
8 th parameter	1	↑	1	--	--	--	--	--	OP03	OP02	OP01	OP00	--	
9 th parameter	1	↑	1	--	--	--	--	--	OP14	OP13	OP12	OP11	OP10	
10 th parameter	1	↑	1	--	--	--	--	--	CGM1[1:0]		CGM0[1:0]		--	
11 th parameter	1	↑	1	--	--	MN12	MN11	MN10	--	MN02	MN01	MN00	--	
12 th parameter	1	↑	1	--	--	MN32	MN31	MN30	--	MN22	MN21	MN20	--	
13 th parameter	1	↑	1	--	--	MN52	MN51	MN50	--	MN42	MN41	MN40	--	
14 th parameter	1	↑	1	--	--	--	--	--	CN03	CN02	CN01	CN00		
15 th parameter	1	↑	1	--	CN23	CN22	CN21	CN20	CN13	CN12	CN11	CN10		
16 th parameter	1	↑	1	--	--	--	--	--	CN33	CN32	CN31	CN30		
17 th parameter	1	↑	1	--	--	--	--	--	CN43	CN42	CN41	CN40		
18 th parameter	1	↑	1	--	--	--	--	--	ON03	ON02	ON01	ON00		
19 th parameter	1	↑	1	--	--	--	--	--	ON14	ON13	ON12	ON11	ON10	
		This command is used to set Gamma Curve 1 Related Setting												
Description	Register Groups	Positive Polarity	Description											
	Center Adjustment	CP/N0 3-0	Variable resistor (VRTP/N) for center adjustment											
		CP/N1 3-0	Variable resistor (VRCP/N0)for center adjustment											
		CP/N2 3-0	Variable resistor (VRMP/N) for center adjustment											
		CP/N3 3-0	Variable resistor (VRCP/N1)for center adjustment											
		CP/N4 3-0	Variable resistor (VRBP/N)for center adjustment											
	Macro Adjustment	MP/N0 2-0	8-to-1 selector (reference voltage level of grayscale 1)											
		MP/N1 2-0	8-to-1 selector (reference voltage level of grayscale 8)											
		MP/N2 2-0	8-to-1 selector (reference voltage level of grayscale 20)											
		MP/N3 2-0	8-to-1 selector (reference voltage level of grayscale 43)											
		MP/N4 2-0	8-to-1 selector (reference voltage level of grayscale 55)											
	Offset Adjustment	MP/N5 2-0	8-to-1 selector (reference voltage level of grayscale 62)											
		OP/N0 3-0	Variable resistor (VROP/N0)for offset adjustment											
		OP/N1 4-0	Variable resistor (VROP/N1)for offset adjustment											
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	Status		Availability											
	Normal Mode On, Idle Mode Off, Sleep Out		Yes											
	Normal Mode On, Idle Mode On, Sleep Out		Yes											
	Partial Mode On, Idle Mode Off, Sleep Out		Yes											
	Partial Mode On, Idle Mode On, Sleep Out		Yes											
Default	Sleep In		Yes											
	Status		Default Value											
	Power On Sequence		OTP value											
	S/W Reset		No change											
Flow Chart														

6.4.9 PASSWDEN: Set Password enable command (B9h)

B9 H		PASSWDEN(Set Password enable command)																										
	DNC	NWR	NRD	D17-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX															
Command	0	↑	1	--	1	0	1	1	1	0	0	1	B9															
1 st parameter	1	↑	1	--	0	0	0	1	0	1	1	1	17h															
2 nd parameter	1	↑	1	--	1	1	0	0	1	1	0	0	CCh															
Description	This command is used to set extended command set access enable.																											
	<table border="1"> <thead> <tr> <th>Extend cmd</th> <th>Command description</th> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)</td> </tr> <tr> <td>Disable(default)</td> <td>After command(BAh), the extended command (Himax command) can not be accessed</td> </tr> </tbody> </table>		Extend cmd	Command description	Enable	After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)	Disable(default)	After command(BAh), the extended command (Himax command) can not be accessed																				
Extend cmd	Command description																											
Enable	After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)																											
Disable(default)	After command(BAh), the extended command (Himax command) can not be accessed																											
	As PASSWDEN command has been written, the external pin EXTC control is invalid, and extended command can access.																											
Restrictions																												
Register Availability	<table border="1"> <thead> <tr> <th></th> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> <td></td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> <td></td> </tr> </tbody> </table>			Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes		Normal Mode On, Idle Mode On, Sleep Out	Yes		Partial Mode On, Idle Mode Off, Sleep Out	Yes		Partial Mode On, Idle Mode On, Sleep Out	Yes												
	Status	Availability																										
Normal Mode On, Idle Mode Off, Sleep Out	Yes																											
Normal Mode On, Idle Mode On, Sleep Out	Yes																											
Partial Mode On, Idle Mode Off, Sleep Out	Yes																											
Partial Mode On, Idle Mode On, Sleep Out	Yes																											
Flow Chart	<pre> graph TD A["\"HW or SW RESET\" and EXTC=\"L\""] --> B["\"User Define Command\" No Operation(NOP)"] B --> C["\"PASSWD_Enable Command\" issue"] C --> D["\"User Define Command\" Operation"] D --> E["\"PASSWD_Disable Command\" issue"] E --> F["\"User Define Command\" No Operation(NOP)"] B --> G["MPU Interface Command set (Standard Command set) Operation"] G --> C </pre>																											

6.4.10 PASSWDDISAB: Password Disable command (BAh)

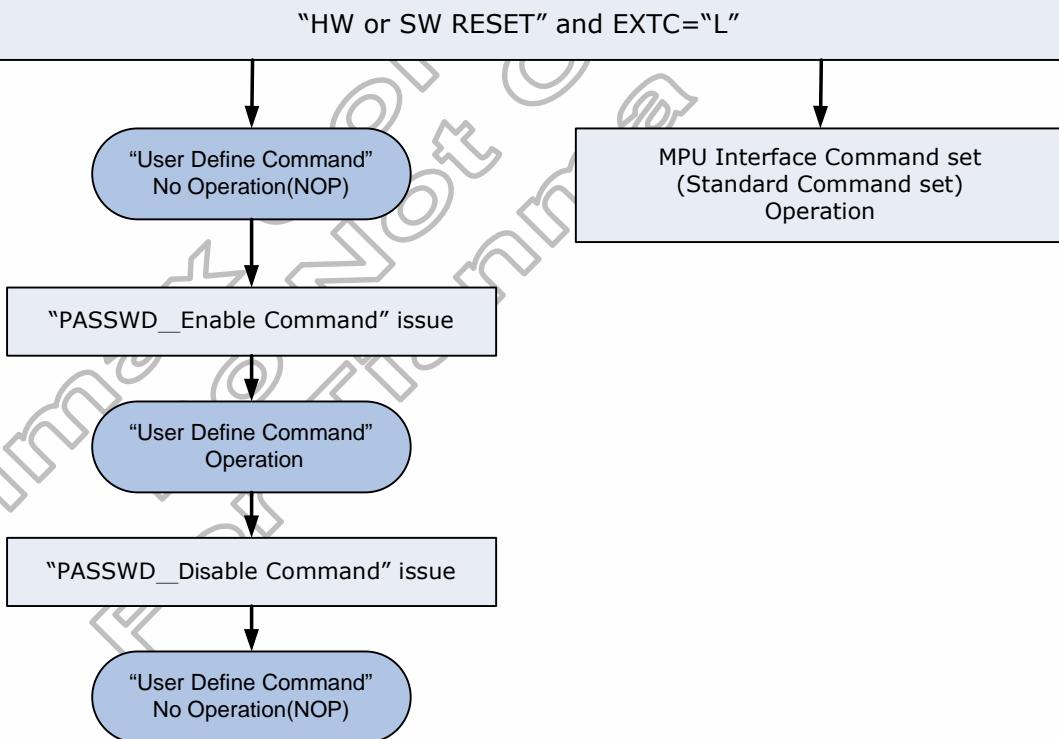BAH	PASSWDDISAB(Password Disable command)																								
	DNC	NWR	NRD	D17-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	--	1	0	1	1	1	0	1	0	BA												
Description	This command is used to set extended command set access enable.																								
<table border="1"> <thead> <tr> <th>Extend cmd</th> <th>Command description</th> </tr> </thead> <tbody> <tr> <td>Enable</td> <td>After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)</td> </tr> <tr> <td>Disable(default)</td> <td>After command(BAh), the extended command (Himax command) can not be accessed</td> </tr> </tbody> </table>													Extend cmd	Command description	Enable	After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)	Disable(default)	After command(BAh), the extended command (Himax command) can not be accessed							
Extend cmd	Command description																								
Enable	After command (B9h), must write 2 parameters (17h, CCh) by order, then can enable the extended command (Himax command)																								
Disable(default)	After command(BAh), the extended command (Himax command) can not be accessed																								
Restrictions																									
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In or Booster Off</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In or Booster Off	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In or Booster Off	Yes																								
Flow Chart	 <pre> graph TD A["HW or SW RESET and EXTC='L'"] --> B["User Define Command No Operation(NOP)"] A --> C["MPU Interface Command set (Standard Command set) Operation"] B --> D["PASSWD_Enable Command issue"] D --> E["User Define Command Operation"] E --> F["PASSWD_Disable Command issue"] F --> G["User Define Command No Operation(NOP)"] </pre>																								

6.4.11 SETOTP: Set OTP Related Setting (BBh)

BB H	SETOTP(Set OTP Related Setting)																								
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	--	1	0	1	1	1	0	1	1	BB												
1 st parameter	1	↑	1	--									--												
2 nd parameter	1	↑	1	--									--												
3 rd parameter	1	↑	1	--	OTP_LO AD_DISA BLE	DCCL K_DIS ABLE	OTP_ POR	OTP_ PWE	OTP_ EN	OTPTE ST_EN	VPP_ SEL	OTP_P ROG	--												
4th parameter	1	↑	1	--	--	--	--	--	OTP_PT[1:0]	OTP_VRADJ[1:0]			--												
Description	This command is used to set OTP Related Setting OTP_MASK7~OTP_MASK0: Bit programming mask, if 1, means don't programming this bit OTP_INDEX7~OTP_INDEX0: Set location of OTP to be programmed OTP_EN: When written to 1, internal register begin written to OTP VPP_SEL: When written to 1, PVSS voltage is fed to OTP OTP_LOAD_DISABLE: When written to 1, auto load from OTP to internal register when SLPOUT command received is disabled, this is used when OTP is not yet programmed DCCLK_DISABLE: Disable Pumping Clock OTPEST_EN: 0 : normal mode, automatic OTP programming mode (by internal state machine) 1 : manual mode 0 is the default value																								
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> <tr> <td>S/W Reset</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> <tr> <td>H/W Reset</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00	S/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00	H/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00				
Status	Default Value																								
Power On Sequence	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																								
S/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																								
H/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hhf, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PT[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																								
Flow Chart																									

6.4.12 SETVDC: Set Internal Digital Voltage (BCh)

BC H	SETVDC(Set internal digital voltage)																								
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	--	1	0	1	1	1	1	0	0	BC												
1 st parameter	1	↑	1	--	--	--	--	--	--	VDC_SEL[2:0]	--	--													
Description	This command is used to set internal digital voltage for digital circuit and GRAM VDC_SEL[1:0]: Not open																								
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>VDC_SEL[2:0]=3'b110</td> </tr> <tr> <td>S/W Reset</td> <td>VDC_SEL[2:0]=3'b110</td> </tr> <tr> <td>H/W Reset</td> <td>VDC_SEL[2:0]=3'b110</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	VDC_SEL[2:0]=3'b110	S/W Reset	VDC_SEL[2:0]=3'b110	H/W Reset	VDC_SEL[2:0]=3'b110				
Status	Default Value																								
Power On Sequence	VDC_SEL[2:0]=3'b110																								
S/W Reset	VDC_SEL[2:0]=3'b110																								
H/W Reset	VDC_SEL[2:0]=3'b110																								
Flow Chart																									

6.4.13 SETSPULSE: Set Arbiter Pulse Width (BDh)

SETSPULSE(Set Arbiter Pulse Width)													
	DN C	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	1	↑	1	0	1	1	1	1	0	1	BD	
1 st parameter	1	1	↑					RTBA[13:8]				--	
2 nd parameter	1	1	↑					RTBA[7:0]				--	
Description	This command is used to set GRAM arbiter pulse width, it is for internal use.												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	Status		Availability										
	Normal Mode On, Idle Mode Off, Sleep Out		Yes										
	Normal Mode On, Idle Mode On, Sleep Out		Yes										
	Partial Mode On, Idle Mode Off, Sleep Out		Yes										
	Partial Mode On, Idle Mode On, Sleep Out		Yes										
	Sleep In		Yes										
Default	Status		Default Value										
	Power On Sequence		SPULSE_ERD[2:0]=3'b100, SPULSE_EWR[2:0]=3'b100, SPULSE_IRD[2:0]=3'b100, ARBMODE_SEL=0, LPLW_EN =0, REFBL_EN[1:0]=2'b00, RPULSE [2:0]=3'b100, DPULSE [2:0]=3'b000										
	S/W Reset		No change										
	H/W Reset		SPULSE_ERD[2:0]=3'b100, SPULSE_EWR[2:0]=3'b100, SPULSE_IRD[2:0]=3'b100, ARBMODE_SEL=0, LPLW_EN =0, REFBL_EN[1:0]=2'b00, RPULSE [2:0]=3'b100, DPULSE [2:0]=3'b000										
Flow Chart													

6.4.14 SETPROBE: Set Probe Signal Group (BEh)

BE H		SETPROBE (Set Probe Signal Group)																								
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command		0	↑	1	--	1	0	1	1	1	1	1	0	BE												
1 st parameter		1	↑	1	--	--	--	--	--	--	--	TEST_M ODE(0)	TEST_O E(0)	--												
2 nd parameter		1	↑	1	--	PROB[7:0]								--												
Description	This command is used to set which group of signals to be observed PROBE[7:0]: Internal use TEST_MODE: Internal use TEST_OE: Internal use																									
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																									
Register Availability	<table border="1"> <tr> <th>Status</th> <th>Availability</th> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </table>														Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																									
Normal Mode On, Idle Mode Off, Sleep Out	Yes																									
Normal Mode On, Idle Mode On, Sleep Out	Yes																									
Partial Mode On, Idle Mode Off, Sleep Out	Yes																									
Partial Mode On, Idle Mode On, Sleep Out	Yes																									
Sleep In	Yes																									
Default	<table border="1"> <tr> <th>Status</th> <th>Default Value</th> </tr> <tr> <td>Power On Sequence</td> <td>PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0</td> </tr> <tr> <td>S/W Reset</td> <td>PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0</td> </tr> <tr> <td>H/W Reset</td> <td>PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0</td> </tr> </table>														Status	Default Value	Power On Sequence	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0	S/W Reset	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0	H/W Reset	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0				
Status	Default Value																									
Power On Sequence	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0																									
S/W Reset	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0																									
H/W Reset	PROBE[7:0]=8'h00, TEST_MODE =0, TEST_OE=0																									
Flow Chart																										

6.4.15 SETPTBA: Set Power Option (BFh)

BF H		SETPTBA (Set Power Option)												
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	0	1	1	1	1	1	1	1	BF
1 st parameter	1	↑	1	--										PTBA[15:8]
2 nd parameter	1	↑	1	--										PTBA[7:0]
Description	This command is used to set power circuit option PTBA[15:0]: Internal use													
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	Status				Availability									
	Normal Mode On, Idle Mode Off, Sleep Out				Yes									
	Normal Mode On, Idle Mode On, Sleep Out				Yes									
	Partial Mode On, Idle Mode Off, Sleep Out				Yes									
	Partial Mode On, Idle Mode On, Sleep Out				Yes									
	Sleep In				Yes									
Default	Status				Default Value									
	Power On Sequence				PTBA[15:0]=16'h0000									
	S/W Reset				PTBA[15:0]=16'h0000									
	H/W Reset				PTBA[15:0]=16'h0000									
Flow Chart														

6.4.16 SETSTBA: Set Source Option (C0h)

C0 H	SETSTBA (Set Source Option)																							
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command	0	↑	1	--	1	1	0	0	0	0	0	0	C0											
1st parameter	0	↑	1	--	--	--	--	--	--	--	--	STB A[8]	--											
2nd parameter	1	↑	1	--	STBA[7:0]								--											
3 rd parameter	1	↑	1	--	VTESTSEL[3:0]				STESTOE[1:0]		--	--	--											
Description	This command is used to set source circuit option STBA[8:0]: Not open VTESTSEL[3:0]: Not open STESTOE: Not open																							
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																							
Register Availability	Status				Availability																			
	Normal Mode On, Idle Mode Off, Sleep Out				Yes																			
	Normal Mode On, Idle Mode On, Sleep Out				Yes																			
	Partial Mode On, Idle Mode Off, Sleep Out				Yes																			
	Partial Mode On, Idle Mode On, Sleep Out				Yes																			
	Sleep In				Yes																			
Default	Status		Default Value																					
	Power On Sequence		STBA[15:0]=16'h0149; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0; TLADD[7:0]=8'b0000_0000																					
	S/W Reset		STBA[15:0]=16'h0149; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0; TLADD[7:0]=8'b0000_0000																					
	H/W Reset		STBA[15:0]=16'h0149; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0; TLADD[7:0]=8'b0000_0000																					
Flow Chart																								

6.4.17 SETID: Set ID (C4h)

C4 H	SETID (Set ID)												
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	1	0	0	0	1	0	0	C4
1 st parameter	1	↑	1	--					ID1[7:0]				--
2 nd parameter	1	↑	1	--	--				ID2[6:0]				--
3 rd parameter	1	↑	1	--					ID3[7:0]				--
Description	This command is used to timing controller internal test												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	Status			Availability									
	Normal Mode On, Idle Mode Off, Sleep Out			Yes									
	Normal Mode On, Idle Mode On, Sleep Out			Yes									
	Partial Mode On, Idle Mode Off, Sleep Out			Yes									
	Partial Mode On, Idle Mode On, Sleep Out			Yes									
	Sleep In			Yes									
Default	Status			Default Value									
	Power On Sequence			OTP value									
	S/W Reset			No Change									
	H/W Reset			OTP value									
Flow Chart													

6.4.18 SETECO: Set ECO (C6h)

C6 H	SETROMT (Set ECO)																					
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	--	1	1	0	0	0	1	1	0	C6									
1 st parameter	1	↑	1	--	ECO0[7:0] (8'b0)																	
2 nd parameter	1	↑	1	--	ECO1[7:0] (8'b0)																	
Description	This command is used for internal test																					
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																					
Register Availability																						
Default																						
Flow Chart																						

Himax Confidential
For DO Not Copy Only

6.4.19 SETMREV: Set Free Running Mode (CAh)

CA H	SETMREV (Set Free Running Mode)															
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX			
Command	0	↑	1	--	1	1	0	0	1	0	1	0	CA			
1 st parameter	1	↑	1	--	--	--	--	--	--	--	SFULL	--	--			
Description	The command is internal use, not open.															
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command															
Register Availability	Status		Availability													
	Normal Mode On, Idle Mode Off, Sleep Out		Yes													
	Normal Mode On, Idle Mode On, Sleep Out		Yes													
	Partial Mode On, Idle Mode Off, Sleep Out		Yes													
	Partial Mode On, Idle Mode On, Sleep Out		Yes													
	Sleep In		Yes													
Default	Status		Default Value													
	Power On Sequence		SFULL=1'b0													
	S/W Reset		SFULL=1'b0													
	H/W Reset		SFULL=1'b0													
Flow Chart																

6.4.20 SETIOOPT: Set IO_OPT (CBh)

CB H	SETIOOPT (Set IO_OPT)												
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	1	0	0	1	0	1	1	CB
1 st parameter	1	↑	1	--									IO_OPT[7:0]
2 nd parameter	1	↑	1	--									IO_OPT2[7:0]
Description	This command is used for internal test												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	Status			Availability									
	Normal Mode On, Idle Mode Off, Sleep Out			Yes									
	Normal Mode On, Idle Mode On, Sleep Out			Yes									
	Partial Mode On, Idle Mode Off, Sleep Out			Yes									
	Partial Mode On, Idle Mode On, Sleep Out			Yes									
	Sleep In			Yes									
Default	Status			Default Value									
	Power On Sequence			IO_OPT[7:0]=8b'01010101									
	S/W Reset			IO_OPT[7:0]=8b'01010101									
	H/W Reset			IO_OPT[7:0]=8b'01010101									
Flow Chart													

6.4.21 SETPANEL: Set PANEL (CCh)

CC H	SETPANEL (Set PANEL)												
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	1	0	0	1	1	0	0	CC
1 st parameter	1	↑	1	--	--	--	--	--	SM_PANEL	SS_PANEL	--	--	--
Description	Compensate for Panel type, layout and color filter order.												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	Status			Availability									
	Normal Mode On, Idle Mode Off, Sleep Out			Yes									
	Normal Mode On, Idle Mode On, Sleep Out			Yes									
	Partial Mode On, Idle Mode Off, Sleep Out			Yes									
	Partial Mode On, Idle Mode On, Sleep Out			Yes									
	Sleep In			Yes									
Default	Status			Default Value									
	Power On Sequence			SM_PANEL=0, SS_PANEL=0,									
	S/W Reset			SM_PANEL=0, SS_PANEL=0,									
	H/W Reset			SM_PANEL=0, SS_PANEL=0,									
Flow Chart													

6.4.22 GETOSC: Read Internal Oscillator (E0h)

GETOSC(Read Internal oscillator setting)													
E0 H	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	1	1	0	0	0	0	0	E0
1 st parameter	xx	1	↑	--	--	--	--	--	--	--	--	--	--
2 nd parameter	1	1	↑	--	CADJ[3:0]				UADJ[2:0]			--	--
3 rd parameter	1	1	↑	--	--				--	RADJ[2:0]			--
4 th parameter	1	1	↑	--	--	--	--	OSC_EN_C_ON(0)	--	--	OSC_EN(0)	--	--
Description	This command is used to read internal oscillator related setting												
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command												
Register Availability	Status			Availability									
	Normal Mode On, Idle Mode Off, Sleep Out			Yes									
	Normal Mode On, Idle Mode On, Sleep Out			Yes									
	Partial Mode On, Idle Mode Off, Sleep Out			Yes									
	Partial Mode On, Idle Mode On, Sleep Out			Yes									
	Sleep In			Yes									
Default	Status			Default Value									
	Power On Sequence			OSC_TEST=0; OSC_EN=0, CADJ[3:0]=OTP value, RADJ=OTP value, UADJ[2:0]=3'b011.									
	S/W Reset			OSC_EN=0h, if OPT is programmed, CADJ[3:0] =OTP value, RADJ=OTP value, else no change									
	H/W Reset			OSC_TEST=0; OSC_EN=0, CADJ[3:0] =OTP value, RADJ=OTP value, UADJ[2:0]=3'b011									
Flow Chart													

6.4.23 GETPOWER: Read Power (E1h)

E1 H		GETPOWER(Read power related setting)																							
		DNC	NWR	NRD	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑		1	1	1	1	0	0	0	0	1	E1												
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--												
2 nd parameter	1	1	↑	GASENB	--	--	PON	DK	--	--	STB	--	--												
3 rd parameter	1	1	↑	--	--	--	--	--	AP[2:0]			--	--												
4 th parameter	1	1	↑	--	--	--	--	--	VC1[2:0]			--	--												
5 th parameter	1	1	↑	--	--	--	--	VRH[3:0]			--	--	--												
6 th parameter	1	1	↑	BT[3:0]				--	--	--	--	--	--												
7 th parameter	1	1	↑	--	--	FS1[1:0]	--	--	FS0[1:0]			--	--												
8 th parameter	1	1	↑	N_DC[7:0]							--	--	--												
9 th parameter	1	1	↑	E_DC[7:0]							--	--	--												
10 th parameter	1	1	↑	--	--	--	--	--	--	--	--	DCCLK_SYNC	--												
Description	This command is used to read power related register.																								
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000</td> </tr> <tr> <td>S/W Reset</td> <td>PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000</td> </tr> <tr> <td>H/W Reset</td> <td>PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000</td> </tr> </tbody> </table>													Status	Default Value	Power On Sequence	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000	S/W Reset	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000	H/W Reset	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000				
Status	Default Value																								
Power On Sequence	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000																								
S/W Reset	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000																								
H/W Reset	PON=1'b0, DK=1'b0, STB=1'b0, AP[2:0]=3'b000, VR2[2:0]=3'b000, VRH[3:0]=4'b0000, BT[3:0]=4'b0000, VDV[4:0]=5'b00000, VCM[5:0]=6'b000000, FS0[1:0]=2'b00, FS1[1:0]=2'b00, DC[7:0]=8'b00000000																								
Flow Chart																									

6.4.24 GETDISP: Read Display Related Register (E2h)

E2 H		GETDISP(Read display related register)																								
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX													
Command	0	↑	1	--	1	1	1	0	0	0	1	0	E2													
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--													
2 nd parameter	1	1	↑	--	PT[1:0]		GON	DTE	D[1:0]		--	--	--													
3 rd parameter	1	1	↑	--	--	--	--	--	N_BP[3:0]																	
4 th parameter	1	1	↑	--	--	--	--	--	N_FP[3:0]																	
5 th parameter	1	1	↑	--	SAP[7:0]								--													
6 th parameter	1	1	↑	--	EQS[7:0]								--													
7 th parameter	1	1	↑	--	EQP[7:0]								--													
8 th parameter	1	1	↑	--	--	--	--	--	GEN_OFF[3:0]																	
9 th parameter	1	1	↑	--	--	--	PTG[1:0]		ISC[3:0]																	
10 th parameter	1	1	↑	--	SAP_I[7:0]								--													
11 th parameter	1	1	↑	--	--	--	--	--	--	--	--	TION_DIS_P(0)														
Description	This command is used to read display related register																									
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																									
Register Availability	<table border="1"> <tr> <td>Status</td> <td>Availability</td> </tr> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </table>														Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																									
Normal Mode On, Idle Mode Off, Sleep Out	Yes																									
Normal Mode On, Idle Mode On, Sleep Out	Yes																									
Partial Mode On, Idle Mode Off, Sleep Out	Yes																									
Partial Mode On, Idle Mode On, Sleep Out	Yes																									
Sleep In	Yes																									
Default	<table border="1"> <tr> <td>Status</td> <td>Default Value</td> </tr> <tr> <td>Power On Sequence</td> <td>D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, P[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00</td> </tr> <tr> <td>S/W Reset</td> <td>D1-0=2'b00, GON=0, DTE=0, PT[1:0]=No change, FP[3:0]=No change, BP[3:0]= No change, ISC[3:0]= No change, SAP[7:0]= No change, SAP2[7:0]= No change, PTG[1:0]= No change</td> </tr> <tr> <td>H/W Reset</td> <td>D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, FP[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00</td> </tr> </table>														Status	Default Value	Power On Sequence	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, P[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00	S/W Reset	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=No change, FP[3:0]=No change, BP[3:0]= No change, ISC[3:0]= No change, SAP[7:0]= No change, SAP2[7:0]= No change, PTG[1:0]= No change	H/W Reset	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, FP[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00				
Status	Default Value																									
Power On Sequence	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, P[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00																									
S/W Reset	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=No change, FP[3:0]=No change, BP[3:0]= No change, ISC[3:0]= No change, SAP[7:0]= No change, SAP2[7:0]= No change, PTG[1:0]= No change																									
H/W Reset	D1-0=2'b00, GON=0, DTE=0, PT[1:0]=2'b00, FP[3:0]=4'b1000, BP[3:0]=4'b1000, ISC[3:0]=4'b000, SAP[7:0]=8'h04, SAP2[7:0]=8'h04, PTG[1:0]=2'b00																									
Flow Chart																										

6.4.25 GETLUT: ReadLUT Enable Related Register (E3h)

E3 H GETRGBIF(Read RGB interface related register)														
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	--	1	1	1	0	0	0	1	1	E3	
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	
2 nd parameter	1	1	↑	--	--	--	LUT_ENB	--	--	--	--	--	--	
Description	This command is used to read RGB interface related register													
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	Status		Availability											
	Normal Mode On, Idle Mode Off, Sleep Out		Yes											
	Normal Mode On, Idle Mode On, Sleep Out		Yes											
	Partial Mode On, Idle Mode Off, Sleep Out		Yes											
	Partial Mode On, Idle Mode On, Sleep Out		Yes											
	Sleep In		Yes											
Default	Status		Default Value											
	Power On Sequence		LUT_EN=OTP value,											
	S/W Reset		LUT_EN= No change ,											
	H/W Reset		LUT_EN=OTP value,											
Flow Chart														

6.4.26 GETCYC: Read Display Waveform Cycle(E4h)

E4H		GETCYC(Read display waveform cycles)																								
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX													
Command	0	↑	1	--	1	1	1	0	0	1	0	0	E47													
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--													
2 nd parameter	1	1	↑	--	N_RTIN[3:0]				--	N_NW[2:0]			--													
3 rd parameter	1	1	↑	--	E_RTIN[3:0]				--	E_NW[2:0]			--													
4 th parameter	1	1	↑	--	--	--	DIV_E[1:0]	--	--	--	--	--	--													
5 th parameter	1	1	↑	--	SON[7:0]																					
6 th parameter	1	1	↑	--	GDON[7:0]																					
7 th parameter	1	1	↑	--	GDOF[7:0]																					
Description	This command is used to read display waveform cycles																									
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																									
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>														Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																									
Normal Mode On, Idle Mode Off, Sleep Out	Yes																									
Normal Mode On, Idle Mode On, Sleep Out	Yes																									
Partial Mode On, Idle Mode Off, Sleep Out	Yes																									
Partial Mode On, Idle Mode On, Sleep Out	Yes																									
Sleep In	Yes																									
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV_N[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00</td> </tr> <tr> <td>S/W Reset</td> <td>NW[3:0]=No change, RTN[3:0]= No change, DIV_N[1:0]= No change, SON [7:0]= No change, GON [7:0]= No change, GOF [7:0]= No change</td> </tr> <tr> <td>H/W Reset</td> <td>NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00</td> </tr> </tbody> </table>														Status	Default Value	Power On Sequence	NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV_N[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00	S/W Reset	NW[3:0]=No change, RTN[3:0]= No change, DIV_N[1:0]= No change, SON [7:0]= No change, GON [7:0]= No change, GOF [7:0]= No change	H/W Reset	NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00				
Status	Default Value																									
Power On Sequence	NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV_N[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00																									
S/W Reset	NW[3:0]=No change, RTN[3:0]= No change, DIV_N[1:0]= No change, SON [7:0]= No change, GON [7:0]= No change, GOF [7:0]= No change																									
H/W Reset	NW[3:0]=4'b0000, RTN[3:0]=4'b0000, DIV[1:0]=2'b00, DIV_PE=2'b00, DIV_E=2'b00, SON[7:0]=8'h00, GON[7:0]=8'h00																									
Flow Chart																										

6.4.27 GETBGP: Read BGP Voltage Setting (E5h)

E5 H		GETBGP(Get BandGap Voltage Setting)																	
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX					
Command	0	↑	1	--	1	1	1	0	0	1	0	1	E5						
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--					
2 nd parameter	1	1	↑	--	--	--	--	--	--	BGP[3:0]				--					
Description	This command is used to read BandGap Voltage setting																		
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																		
Register Availability	Status		Availability																
	Normal Mode On, Idle Mode Off, Sleep Out		Yes																
	Normal Mode On, Idle Mode On, Sleep Out		Yes																
	Partial Mode On, Idle Mode Off, Sleep Out		Yes																
	Partial Mode On, Idle Mode On, Sleep Out		Yes																
	Sleep In		Yes																
Default	Status		Default Value																
	Power On Sequence		BGP[3:0]=OTP value																
	S/W Reset		BGP[3:0]=No Change																
	H/W Reset		BGP[3:0]= OTP value																
Flow Chart																			

6.4.28 GETVCOM: Read VCOM Voltage Setting (E6h)

E6 H		GETVCOM(Read VCOM Voltage)																						
	DN C	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX											
Command	0	↑	1	--	1	1	1	0	0	1	1	0	E6											
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--											
2 nd parameter	1	1	↑	--	VCO MG	--	--	--	--	--	--	--	--											
3 rd parameter	1	1	↑	--	--	VCMN[6:0]							--											
4 th parameter	1	1	↑	--	--								VDV[4:0]	--										
Description	This command is used to read VCOM Low and VCOM High Voltage setting																							
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																							
Register Availability	Status				Availability																			
	Normal Mode On, Idle Mode Off, Sleep Out				Yes																			
	Normal Mode On, Idle Mode On, Sleep Out				Yes																			
	Partial Mode On, Idle Mode Off, Sleep Out				Yes																			
	Partial Mode On, Idle Mode On, Sleep Out				Yes																			
	Sleep In				Yes																			
Default	Status		Default Value																					
	Power On Sequence		VCOMG=1'b0, VDV[4:0]= OTP value, VCMN[5:0]= OTP value, VCME[5:0]= OTP value, VCMPE[5:0]= OTP value																					
	S/W Reset		VCOMG=1'b0, VDV[4:0]= OTP value, VCMN[5:0]= OTP value, VCME[5:0]= OTP value, VCMPE[5:0]= OTP value																					
	H/W Reset		VCOMG=1'b0, VDV[4:0]= OTP value, VCMN[5:0]= OTP value, VCME[5:0]= OTP value, VCMPE[5:0]= OTP value																					
Flow Chart																								

6.4.29 GETGAMMA: Read Gamma Curve Related Setting (E7h)

GETGAMMA1(Read Gamma Curve1 Related Setting)																		
E7 H	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX					
Command	0	↑	1	--	1	1	1	0	0	1	1	1	E7					
1st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--					
2nd parameter	1	1	↑	--	--	MP12	MP11	MP10	--	MP02	MP01	MP00	--					
3rd parameter	1	1	↑	--	--	MP32	MP31	MP30	--	MP22	MP21	MP20	--					
4th parameter	1	1	↑	--	--	MP52	MP51	MP50	--	MP42	MP41	MP40	--					
5th parameter	1	1	↑	--	--	--	--	■	CP03	CP02	CP01	CP00	--					
6th parameter	1	1	↑	--	CP23	CP22	CP21	CP20	CP13	CP12	CP11	CP10	--					
7th parameter	1	1	↑	--	--	--	--	--	CP33	CP32	CP31	CP30	--					
8th parameter	1	1	↑	--	--	--	--	■	CP43	CP42	CP41	CP40	--					
9th parameter	1	1	↑	--	--	--	--	■	OP03	OP02	OP01	OP00	--					
10th parameter	1	1	↑	--	--	--	■	OP14	OP13	OP12	OP11	OP10						
11th parameter	1	1	↑	--	--	--	--	--	CGM1[1:0]		CGM0[1:0]		--					
12th parameter	1	1	↑	--	--	MN12	MN11	MN10	--	MN02	MN01	MN00	--					
13th parameter	1	1	↑	--	--	MN32	MN31	MN30	--	MN22	MN21	MN20	--					
14th parameter	1	1	↑	--	--	MN52	MN51	MN50	--	MN42	MN41	MN40	--					
15th parameter	1	1	↑	--	--	--	--	■	CN03	CN02	CN01	CN00						
16th parameter	1	1	↑	--	CN23	CN22	CN21	CN20	CN13	CN12	CN11	CN10						
17th parameter	1	1	↑	--	--	--	--	--	CN33	CN32	CN31	CN30						
18th parameter	1	1	↑	--	--	--	--	■	CN43	CN42	CN41	CN40						
19th parameter	1	1	↑	--	--	--	--	■	ON03	ON02	ON01	ON00						
20th parameter	1	1	↑	--	--	--	■	ON14	ON13	ON12	ON11	ON10						
Description	This command is used to read Gamma Curve Related Setting																	
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																	
Register Availability	Status					Availability												
	Normal Mode On, Idle Mode Off, Sleep Out					Yes												
	Normal Mode On, Idle Mode On, Sleep Out					Yes												
	Partial Mode On, Idle Mode Off, Sleep Out					Yes												
	Partial Mode On, Idle Mode On, Sleep Out					Yes												
	Sleep In					Yes												
Default	Status		Default Value															
	Power On Sequence		OTP value															
	S/W Reset		No change															
	H/W Reset		OTP value															
Flow Chart																		

6.4.30 GETOTP: Read OTP Related Setting (EBh)

EB H		GETOTP(Read OTP Related Setting)																								
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX													
Command	0	↑	1	--	1	1	1	0	1	0	1	1	EB													
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--													
2 nd parameter	1	1	↑	--	OTP_MASK[7:0]																					
3 rd parameter	1	1	↑	--	OTP_INDEX[7:0]																					
4 th parameter	1	1	↑	--	OTP_LO AD_DIS ABLE	DCCLK _DISA BLE	OTP _PO R	OTP _PWE-	OTP _PTM	OTPES T_EN	VPP _SEL	OTP _PROG	---													
5 th parameter	1	1	↑	--	--	--	--	--	OTP_PTMI[1:0]	OTP_VRADJ[1:0]																
6 th parameter	1	1	↑	--	OTP_DATA[7:0]																					
Description	This command is used to set OTP Related Setting OTP_MASK7~OTP_MASK0: Bit programming mask, if 1, means don't programming this bit OTP_INDEX7~OTP_INDEX0: Set location of OTP to be programmed OTP_EN: When written to 1, internal register begin written to OTP VPP_SEL: When written to 1, PVSS voltage is fed to OTP OTP_LOAD_DISABLE: When written to 1, auto load from OTP to internal register when SLPOUT command received is disabled, this is used when OTP is not yet programmed DCCLK_DISABLE: Disable Pumping Clock OTPEST_EN: 0 : normal mode, automatical OTP programming mode (by internal state machine) 1 : manual mode 0 is the default value																									
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																									
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>														Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																									
Normal Mode On, Idle Mode Off, Sleep Out	Yes																									
Normal Mode On, Idle Mode On, Sleep Out	Yes																									
Partial Mode On, Idle Mode Off, Sleep Out	Yes																									
Partial Mode On, Idle Mode On, Sleep Out	Yes																									
Sleep In	Yes																									
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> <tr> <td>S/W Reset</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> <tr> <td>H/W Reset</td> <td>OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00</td> </tr> </tbody> </table>														Status	Default Value	Power On Sequence	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00	S/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00	H/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00				
Status	Default Value																									
Power On Sequence	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																									
S/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																									
H/W Reset	OTP_MASK[7:0]=8'h00, OTP_INDEX[7:0]=8'hff, OTP_LOAD_DISABLE=0, DCCLK_DISABLE=0, VPP_SEL=0, OTP_PROG=0, OTPEST_EN=0, OTP_EN=0, OTP_PTMI[1:0]=2'b00, OTP_VRADJ[1:0] =2'b00																									
Flow Chart																										

6.4.31 GETVDC: Read Internal Digital Voltage Setting (ECh)

EC H		GETVDC(Read internal digital voltage)												
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX
Command	0	↑	1	--	1	1	1	0	1	1	0	0	0	EC
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--
2 nd parameter	1	1	↑	--	--	--	--	--	--	VDC_SEL[2:0]	--	--	--	--
Description	This command is used to read internal digital voltage setting													
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	Status							Availability						
	Normal Mode On, Idle Mode Off, Sleep Out							Yes						
	Normal Mode On, Idle Mode On, Sleep Out							Yes						
	Partial Mode On, Idle Mode Off, Sleep Out							Yes						
	Partial Mode On, Idle Mode On, Sleep Out							Yes						
	Sleep In							Yes						
Default	Status							Default Value						
	Power On Sequence							VDC_SEL[1:0]=2'b00						
	S/W Reset							VDC_SEL[1:0]=2'b00						
	H/W Reset							VDC_SEL[1:0]=2'b00						
Flow Chart														

6.4.32 GETSPULSE: Read Arbiter Pulse Width (EDh)

GETSPULSE(Get Arbiter Pulse Width)																								
	DN C	NRD	NWR	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	1	↑	1	1	1	0	1	1	0	1	ED												
1 st parameter	1	1	↑	RTBA[13:8]								-												
2 nd parameter	1	1	↑	RTBA[7:0]																				
Description	This command is used to get GRAM arbiter pulse width, it is for internal use.																							
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																							
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td> <td>Yes</td> </tr> <tr> <td>Sleep In</td> <td>Yes</td> </tr> </tbody> </table>												Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																							
Normal Mode On, Idle Mode Off, Sleep Out	Yes																							
Normal Mode On, Idle Mode On, Sleep Out	Yes																							
Partial Mode On, Idle Mode Off, Sleep Out	Yes																							
Partial Mode On, Idle Mode On, Sleep Out	Yes																							
Sleep In	Yes																							
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td> <td>SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00 RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001</td> </tr> <tr> <td>S/W Reset</td> <td>No change</td> </tr> <tr> <td>H/W Reset</td> <td>SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00, RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001</td> </tr> </tbody> </table>												Status	Default Value	Power On Sequence	SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00 RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001	S/W Reset	No change	H/W Reset	SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00, RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001				
Status	Default Value																							
Power On Sequence	SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00 RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001																							
S/W Reset	No change																							
H/W Reset	SPULSE_ERD[2:0]=3'b011, SPULSE_EWR[2:0]=3'b001, SPULSE_IRD[2:0]=3'b011, ARBMODE_SEL=0, LPLW_EN=0, REFBL_EN[1:0]=2'b00, RPULSE [2:0]=3'b011, DPULSE [2:0]=3'b001																							
Flow Chart																								

6.4.33 GETPROBE: Read Probe Signal Group (EEh)

EE H		GETPROBE (Read Probe Signal Group)																					
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command		0	↑	1	--	1	1	1	0	1	1	1	0	EE									
1 st parameter		1	1	↑	--	--	--	--	--	--	--	--	--	--									
2 nd parameter		1	1	↑	--	--	--	--	--	--	--	TEST_MODE	TEST_OE	--									
3 rd parameter		1	1	↑	--	PROB[7:0]								--									
Description	This command is used to read which group of signals to be observed																						
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																						
Register Availability	Status		Availability																				
	Normal Mode On, Idle Mode Off, Sleep Out		Yes																				
	Normal Mode On, Idle Mode On, Sleep Out		Yes																				
	Partial Mode On, Idle Mode Off, Sleep Out		Yes																				
	Partial Mode On, Idle Mode On, Sleep Out		Yes																				
	Sleep In		Yes																				
Default	Status		Default Value																				
	Power On Sequence		PROBE[7:0]=8'h00, TEST_MODE=1'b0, TEST_OE=1'b0																				
	S/W Reset		PROBE[7:0]=8'h00, TEST_MODE=1'b0, TEST_OE=1'b0																				
	H/W Reset		PROBE[7:0]=8'h00, TEST_MODE=1'b0, TEST_OE=1'b0																				
Flow Chart																							

6.4.34 GETPTBA: Read Power Option (EFh)

EF H		GETPTBA (Read Power Option)																					
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	--	1	1	1	0	1	1	1	1	1	EF									
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--									
2 nd parameter	1	1	↑	--	PTBA[15:8]									--									
3 rd parameter	1	1	↑	--	PTBA[7:0]									--									
Description	This command is used to read power circuit option setting																						
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																						
Register Availability	Status				Availability																		
	Normal Mode On, Idle Mode Off, Sleep Out				Yes																		
	Normal Mode On, Idle Mode On, Sleep Out				Yes																		
	Partial Mode On, Idle Mode Off, Sleep Out				Yes																		
	Partial Mode On, Idle Mode On, Sleep Out				Yes																		
	Sleep In				Yes																		
Default	Status				Default Value																		
	Power On Sequence				PTBA[15:0]=16'h0000;																		
	S/W Reset				PTBA[15:0]=16'h0000;																		
	H/W Reset				PTBA[15:0]=16'h0000;																		
Flow Chart																							

6.4.35 GETSTBA: Read Source Option (F0h)

F0 H GETSTBA (Read Source Option)																									
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX												
Command	0	↑	1	--	1	1	1	1	0	0	0	0	F0												
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--												
2 nd parameter	1	1	↑	--									STBA [8] --												
3 rd parameter	1	1	↑	--									--												
4 th parameter	1	1	↑	--		VTESTSEL[3:0]		STESTOE[1:0]					--												
Description	This command is used to read source circuit option setting																								
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																								
Register Availability	<table border="1"> <thead> <tr> <th>Status</th> <th>Availability</th> </tr> </thead> <tbody> <tr> <td>Normal Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Normal Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode Off, Sleep Out</td><td>Yes</td></tr> <tr> <td>Partial Mode On, Idle Mode On, Sleep Out</td><td>Yes</td></tr> <tr> <td>Sleep In</td><td>Yes</td></tr> </tbody> </table>													Status	Availability	Normal Mode On, Idle Mode Off, Sleep Out	Yes	Normal Mode On, Idle Mode On, Sleep Out	Yes	Partial Mode On, Idle Mode Off, Sleep Out	Yes	Partial Mode On, Idle Mode On, Sleep Out	Yes	Sleep In	Yes
Status	Availability																								
Normal Mode On, Idle Mode Off, Sleep Out	Yes																								
Normal Mode On, Idle Mode On, Sleep Out	Yes																								
Partial Mode On, Idle Mode Off, Sleep Out	Yes																								
Partial Mode On, Idle Mode On, Sleep Out	Yes																								
Sleep In	Yes																								
Default	<table border="1"> <thead> <tr> <th>Status</th> <th>Default Value</th> </tr> </thead> <tbody> <tr> <td>Power On Sequence</td><td>STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;</td></tr> <tr> <td>S/W Reset</td><td>STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;</td></tr> <tr> <td>H/W Reset</td><td>STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;</td></tr> </tbody> </table>													Status	Default Value	Power On Sequence	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;	S/W Reset	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;	H/W Reset	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;				
Status	Default Value																								
Power On Sequence	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;																								
S/W Reset	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;																								
H/W Reset	STBA[15:0]=16'h0081; VTESTSEL[3:0]=4'b0000; STESTOE1=1'b0, STESTOE0=1'b0, GAOE=1'b0; GMA=1'b0;																								
Flow Chart																									

6.4.36 GETPFUSE: Get Internal OTP (F1h)

F1 H		GETPFUSE (Set internal Efuse)																						
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX										
Command	0	↑		1	--	1	1	1	1	0	0	0	1	F1										
1st parameter	1	↑		1	--	-	-	-	-	-	-	-	PFUSE											
Description	This command is used to set source circuit option PFUSE: Internal use for OTP programming. This pad is only for internal use, not open.																							
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																							
Register Availability	Status		Availability																					
	Normal Mode On, Idle Mode Off, Sleep Out		Yes																					
	Normal Mode On, Idle Mode On, Sleep Out		Yes																					
	Partial Mode On, Idle Mode Off, Sleep Out		Yes																					
	Partial Mode On, Idle Mode On, Sleep Out		Yes																					
	Sleep In		Yes																					
Default	Status		Default Value																					
	Power On Sequence		PFUSE=0																					
	S/W Reset		PFUSE=0																					
	H/W Reset		PFUSE=0																					
Flow Chart																								

6.4.37 GETHXID: Read Himax ID (F4h)

F4 H		GETHXID (Read)																					
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	--	1	1	1	1	0	1	0	0	0	F4									
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--									
2 nd parameter	1	1	↑	--	ID_version[7:0](8'h53)									--									
3 rd parameter	1	1	↑	--	ID2_version [7:0](0Ch)																		
4 th parameter	1	1	↑	--	VersionID[7:0](00h)									--									
Description	It is for internal use, not open.																						
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																						
Register Availability	Status		Availability																				
	Normal Mode On, Idle Mode Off, Sleep Out																						
	Normal Mode On, Idle Mode On, Sleep Out																						
	Partial Mode On, Idle Mode Off, Sleep Out																						
	Partial Mode On, Idle Mode On, Sleep Out																						
	Sleep In																						
Default	Status		Default Value																				
	Power On Sequence																						
	S/W Reset																						
	H/W Reset																						
Flow Chart																							

6.4.38 GETECO: Read ECO(F6h)

F6H		GETECO (Read)																					
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	--	1	1	1	1	0	1	1	1	0	F6									
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--									
2 nd parameter	1	1	↑	--	ECO0[7:0]									--									
3 rd parameter	1	1	↑	--	ECO1[7:0]									--									
Description	It is for internal use, not open.																						
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																						
Register Availability	Status		Availability																				
	Normal Mode On, Idle Mode Off, Sleep Out																						
	Normal Mode On, Idle Mode On, Sleep Out																						
	Partial Mode On, Idle Mode Off, Sleep Out																						
	Partial Mode On, Idle Mode On, Sleep Out																						
Default	Sleep In																						
	Status		Default Value																				
	Power On Sequence																						
	S/W Reset																						
	H/W Reset																						
Flow Chart																							

6.4.39 GETMREV: Get Free Running Mode (FAh)

FA H		GETMREV (Get Free Running Mode)													
		DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	--	1	1	1	1	1	1	0	1	0	FA	
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--	
2 nd parameter	1	1	↑	--	--	--	--	--	--	--	SFULL	--	--	--	
Description	It is for internal use, not open.														
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command														
Register Availability	Status		Availability												
	Normal Mode On, Idle Mode Off, Sleep Out														
	Normal Mode On, Idle Mode On, Sleep Out														
	Partial Mode On, Idle Mode Off, Sleep Out														
	Partial Mode On, Idle Mode On, Sleep Out														
	Sleep In														
Default	Status		Default Value												
	Power On Sequence		SFULL=0												
	S/W Reset		SFULL=0												
	H/W Reset		SFULL=0												
Flow Chart															

6.4.40 GETIOOPT: Get IO_OPT (FBh)

FB H	GETIOOPT (Get IO_OPT)																					
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX									
Command	0	↑	1	--	1	1	0	0	1	0	1	1	FB									
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--									
2 nd parameter	1	1	↑	--	IO_OPT[7:0](0101_0101)								--									
3 rd parameter	1	1	↑	--	IO_OPT2[7:0] (0000_0000)																	
Description	It is for internal use, not open.																					
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command																					
Register Availability	Status							Availability														
	Normal Mode On, Idle Mode Off, Sleep Out																					
	Normal Mode On, Idle Mode On, Sleep Out																					
	Partial Mode On, Idle Mode Off, Sleep Out																					
	Partial Mode On, Idle Mode On, Sleep Out																					
	Sleep In																					
Default	Status							Default Value														
	Power On Sequence							IO_OPT[7:0]=8b'00000000														
	S/W Reset							IO_OPT[7:0]=8b'00000000														
	H/W Reset							IO_OPT[7:0]=8b'00000000														
Flow Chart																						

6.4.41 GETPANEL: Get PANEL (FCh)

FC H	SETPANEL (Set PANEL)													
	DNC	NWR	NRD	D15-8	D7	D6	D5	D4	D3	D2	D1	D0	HEX	
Command	0	↑	1	--	1	1	1	1	1	1	0	0	FC	
1 st parameter	1	1	↑	--	--	--	--	--	--	--	--	--	--	--
2 nd parameter	1	1	↑	--	--	--	--	SM_PA NEL	SS_PA NEL	--	--	--	--	--
Description	Compensate for Panel type, layout and color filter order.													
Restrictions	If EXTC is high or enable PASSWDEN command (even EXTC = low) can enable this command													
Register Availability	Status							Availability						
	Normal Mode On, Idle Mode Off, Sleep Out													
	Normal Mode On, Idle Mode On, Sleep Out													
	Partial Mode On, Idle Mode Off, Sleep Out													
	Partial Mode On, Idle Mode On, Sleep Out													
	Sleep In													
Default	Status							Default Value						
	Power On Sequence							SM_PANEL=0, SS_PANEL=0,						
	S/W Reset							SM_PANEL=0, SS_PANEL=0,						
	H/W Reset							SM_PANEL=0, SS_PANEL=0,						
Flow Chart														

7. Electrical Characteristic

7.1 Absolute Maximum Ratings

Item	Symbol	Value	(VSS = 0V) Unit
Supply voltage 1	VDD	- 0.3 ~ + 3.7	V
Supply voltage 2	VDDI	- 0.3 ~ + 3.7	V
Drive Supply Voltage	VGH – VGL	- 0.3 ~ + 32.0	V
Input voltage range	VIN	- 0.3 ~ VDDI + 0.3	V
Output voltage range	VO	- 0.3 ~ VDDI + 0.3	V
Operating temperature range	TOPR	- 40 ~ + 85	°C
Storage temperature range	TSTG	- 55 ~ + 125	°C

Table 7. 1 Absolute Maximum Ratings

7.2 ESD Protection Level

Mode	Test Condition	Protection Level	Unit
Human Body Model	C=100 pF, R=1.5kΩ	> 3000	V
Machine Model	C=200 pF, R=0.0Ω	> 300	V

Table 7. 2 ESD Protection Level

7.3 Maximum Series Resistance

Name	Type	Maximum Series Resistance	Unit
VDD	Power supply	10	Ω
VDDI	Power supply	10	Ω
VSSA	Power supply	10	Ω
VSSD	Power supply	10	Ω
OSC	Input	100	Ω
EXTC	Input	100	Ω
P68, BS2, BS1, BS0	Input	100	Ω
STE_SEL, GC_SEL, SPI_SEL	Input	100	Ω
RSO0, RSO1, RSO2	Input	100	Ω
LC_SEL0, LC_SEL1, BURN	Input	100	Ω
NRESET, NCS, DNC_SCL	Input	100	Ω
NWR_RNW, NRD_E	Input	100	Ω
TEST[3:1], VDC_ENB	Input	100	Ω
SS_PANEL, GS_PANEL, REV_PANEL, BGR_PANEL	Input	100	Ω
DUMMYR1,DummyR2,	Input	100	Ω
DB0_SDA, DB17 ~ DB1	Input / Output	100	Ω
VGH	Capacitor connection	10	Ω
VGL	Capacitor connection	10	Ω
C11A, C11B	Capacitor connection	10	Ω
C22A, C22B	Capacitor connection	10	Ω
C21A, C21B	Capacitor connection	10	Ω
VDDD	Capacitor connection	20	Ω
VLCD	Capacitor connection	10	Ω
VCL	Capacitor connection	10	Ω
TE	Output	100	Ω
VCOMH, VCOML	Output	50	Ω
VREGIOUT	Output	50	Ω
VREF	Output	50	Ω
VTESTOUT	Output	50	Ω
VCOM	Output	50	Ω

Table 7. 3

Himax Confidential

This information contained herein is the exclusive property of Himax and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of Himax.

7.4 DC Characteristics

7.4.1 DC Characteristics List

Parameter	Symbol	Conditions	Related Pins	Min.	Typ.	Max.	Unit
Power & Operating Voltages							
IO Operating voltage	VDDI	-	VDDI ⁽²⁾	1.65	1.8	1.95	V
Analog & Logic Operating voltage	VDD, VDDI	-	VDD, VDDI ⁽²⁾	2.3	2.5/2.75	2.9	
Source Drive Voltage	VS	-	VS ⁽³⁾	3.0	4.5	5.0	
Gate Drive High Voltage	VGH	-	VGH ⁽³⁾	9.0	14.0	16.	
Drive Supply Voltage	VGH-VGL	-	VGH, VGL ⁽³⁾	15.0	27.0	30	
Input / Output							
High level input voltage	VIH	-	Note ^{(1),(2)}	0.7VDDI	-	VDDI	V
Low level input voltage	VIL	-	Note ^{(1),(2)}	VSSA	-	0.3VDDI	
High level output voltage	VOH	IOH = -1.0mA	DB17 to DB0, TE, TEST1 ⁽²⁾	0.8VDDI	-	VDDI	
Low level output voltage	VOL	IOL = +1.0mA		VSSA	-	0.2VDDI	
Input leakage current	IIL	VIN = VDDI or VSSA	Note ^{(1),(2)}	1.0	-	+1.0	µA

Note: (1) OSC, P68, BS1, BS0, NRESET, DNC_SCL, NWR_RNW, NRD_E, and DB17 to DB0 pins

(2), (3) When the measurement are performed with LCD module, Measurement Points are like below

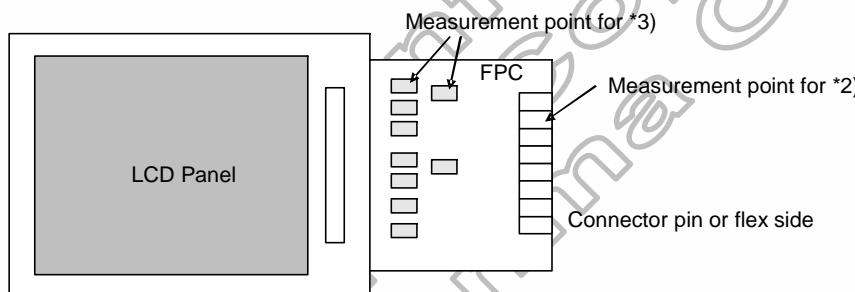


Table 7. 4 DC Characteristics 1

Parameter	Symbol	Conditions	Related Pins	Min.	Typ.	Max.	Unit
VCOM Generator							
VCOM amplitude	VCOMA	No load	VCOMH VCOML	2.5	--	5	V
VCOM output high resistance	Rvcomh	VCOM output = High IVCOM = 1mA	VCOM	-	100	-	Ω
VCOM output low resistance	Rvcoml	VCOM output = Low IVCOM = 1mA	VCOM	-	100	-	
Source Driver							
Gray scale resistance	Rgray	Rap~Rjp, Ran~Rjn, R0~R62 of gray voltage generator	S1 to S396	0.7*Rx	Rx	1.3*Rx	Ω
Drive output current ^{(1),(2)}	Ivosh	VS=4.25V, VSO=V0 at positive, VOUT=V0-2V	S1 to S396	-	-200	-100	µA
	Ivosl	VS=4.25V, VSO=V0 at negative, VOUT=V0-2V	S1 to S396	100	200	-	µA
Output voltage deviation	Dvos	VSSD+1.0 ~ VS-1.0	S1 to 396	-	±10	±20	mV
		VSSD+0.1V ~ VSSD+1.0 VS-1.0 ~ VS-0.1V	S1 to 396	-	±30	±50	mV
Output voltage range	Vos	-	S1 to 396	0.1	-	VS-0.1	V
Gate Driver							
Output ON resistance ⁽³⁾	Rong	Ta = 25 °C	G1 to G162	-	2	3	kΩ

Note: (1) VSO is the output voltage of source output pins S1 to S396.

(2) VOUT is the applied voltage to source output pins S1 to S396.

(3) Resistance value when -0.1[mA] is applied during the ON status of the gate output pin G0 to G160.

RON [] = V [V] / 0.1[mA] (V: Voltage change when -0.1[mA] is applied in the on status.)

Table 7. 5 DC Characteristics 2

7.4.2 Current Consumption

Host I/F	Mode of operation	Frame Frequency	Inversion Mode	Image	Memory Data Access Control (MY:MX:MV)	Current consumption			
						Typical		Worst case	
						VDD (mA)	VDDI (mA)	VDD (mA)	VDDI (mA)
Host interface NOT active	- Normal Mode On - Partial Mode Off - Idle Mode Off - Sleep Out Mode	60Hz	TBD	Note(1)	X;X;X	TBD	TBD	TBD	TBD
			TBD	Note(2)	X;X;X	TBD	TBD	TBD	TBD
			TBD	Note(3)	X;X;X	TBD	TBD	TBD	TBD
			TBD	Note(4)	X;X;X	TBD	TBD	TBD	TBD
			TBD	Note(5)	X;X;X	TBD	TBD	TBD	TBD
	- Normal Mode On - Partial Mode Off - Idle Mode On - Sleep Out Mode	60Hz	TBD	Note(5)	X;X;X	TBD	TBD	TBD	TBD
	- Normal Mode Off - Partial Mode On (32 lines) - Idle Mode Off - Sleep Out Mode	60Hz	TBD	Grey Levels	X;X;X	TBD	TBD	TBD	TBD
	- Normal Mode Off - Partial Mode On (32 lines) - Idle Mode On - Sleep Out Mode	60Hz	TBD	Note(6)	X;X;X	TBD	TBD	TBD	TBD
			TBD	Note(7)	X;X;X	TBD	TBD	TBD	TBD
	- Sleep In Mode	N/A	N/A	N/A	X;X;X	TBD		TBD	
Host interface active	- Normal Mode On - Partial Mode Off - Idle Mode Off - Sleep Out Mode	60Hz	TBD	262k Colors ⁽⁸⁾ CPU Access @ 15fps	0;0;0	TBD	TBD	TBD	TBD
					0;0;1	TBD	TBD	TBD	TBD
					0;1;0	TBD	TBD	TBD	TBD
					0;1;1	TBD	TBD	TBD	TBD
					1;0;0	TBD	TBD	TBD	TBD
				262k Colors ⁽⁸⁾ CPU Access @ 25fps	1;0;1	TBD	TBD	TBD	TBD
					1;1;0	TBD	TBD	TBD	TBD
					1;1;1	TBD	TBD	TBD	TBD
					0;0;0	TBD	TBD	TBD	TBD
					0;0;1	TBD	TBD	TBD	TBD
					0;1;0	TBD	TBD	TBD	TBD
					0;1;1	TBD	TBD	TBD	TBD
					1;0;0	TBD	TBD	TBD	TBD
					1;0;1	TBD	TBD	TBD	TBD
					1;1;0	TBD	TBD	TBD	TBD
					1;1;1	TBD	TBD	TBD	TBD

Note: X Do not care

- (1) All pixels black
- (2) Checker board one by one
- (3) Checker board 4 by 4
- (4) Grey-scale from top to bottom
- (5) 20% Black, 80%White
- (6) Black & White Checker board 8 by 8.
- (7) Absolute Worst Case Patterns: Defined by Display Supplier
- (8) Absolute Worst Case Patterns and Sequences: Defined by Display Supplier
- (9) Absolute worst case VDD current is less than TBD mA in the case of CPU access is inactive, Normal Mode On, Partial Mode Off, Idle Mode Off, Sleep Out mode.
- (10) Absolute worst case VDDI current is less than TBD mA in the case of CPU access is inactive, Normal Mode On, Partial Mode Off, Idle Mode Off, Sleep Out mode.
- (11) Inrush currents are not included in current consumption values

Typical Case:

TA = 25oC
VDD2 = 2.75V
VDD1 = 1.8V

Worst Case:

TA = -30 to 70oC
VDD2 = 2.5V to 2.9V
VDD1 = 1.65V to 2.5V
Includes Process Variance.

Table 7. 6 Current Consumption

7.5 AC CHARACTERISTICS

7.5.1 Parallel Interface Characteristics (8080-series MPU)

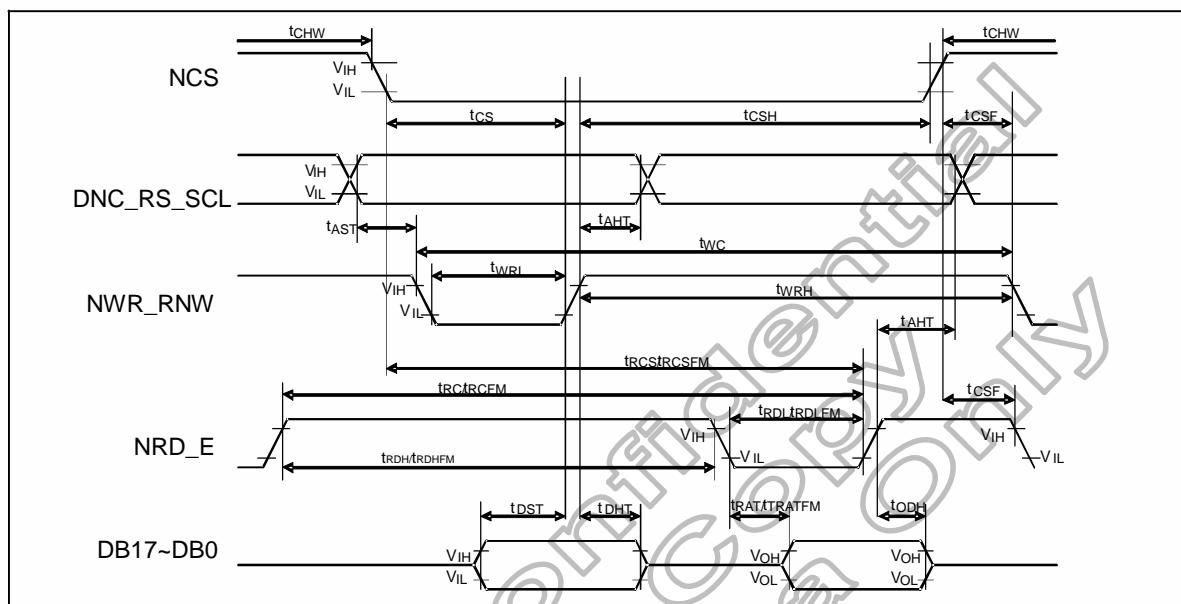


Figure 7. 1 Parallel Interface characteristics (8080-series MPU)

(VSSA=0V, VDDI=1.65V to 2.50V, VDD=2.3V to 2.9V, Ta = -30 to 70 °C)

Signal	Symbol	Parameter	Min.	Max.	Unit	Description
DNC_RS_SCL	tAST	Address setup time	0	-	ns	-
	taHT	Address hold time (Write/Read)	10	-	ns	-
NCS	tCHW	Chip select "H" pulse width	0	-	ns	-
	tCS	Chip select setup time (Write)	15	-	ns	-
	tRCS	Chip select setup time (Read ID)	45	-	ns	-
	tRCSFM	Chip select setup time (Read FM)	355	-	ns	-
	tCSF	Chip select wait time (Write/Read)	10	-	ns	-
NWR_RNW	tWC	Write cycle	66	-	ns	-
	tWRH	Control pulse "H" duration	15	-	ns	-
	tWRH	Control pulse "L" duration	15	-	ns	-
NRD_E (ID)	tRC	Read cycle (ID)	160	-	ns	-
	trDH	Control pulse "H" duration (ID)	90	-	ns	When read ID data
	trDL	Control pulse "L" duration (ID)	45	-	ns	-
NRD_E (FM)	tRCFM	Read cycle (FM)	450	-	ns	-
	trDHF	Control pulse "H" duration (FM)	90	-	ns	When read from frame memory
	trDLFM	Control pulse "L" duration (FM)	355	-	ns	-
DB17 to DB0	tDST	Data setup time	10	-	ns	-
	tdHT	Data hold time	10	-	ns	-
	tRAT	Read access time (ID)	-	40	ns	For maximum $C_L=30\text{pF}$
	tRATFM	Read access time (FM)	-	340	ns	For minimum $C_L=8\text{pF}$
	tODH	Output disable time	20	80	ns	-

Note: The input signal rise time and fall time (tr , tf) is specified at 15 ns or less.

Logic high and low levels are specified as 30% and 70% of VDD1 for Input signals.

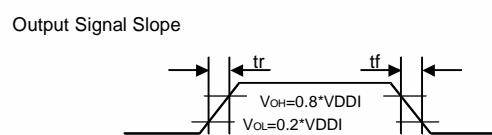
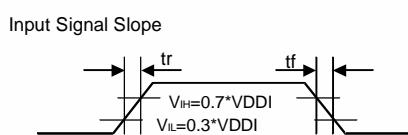
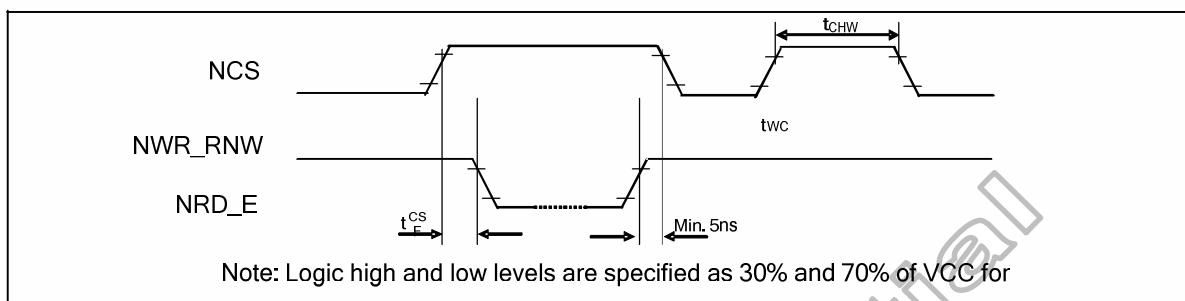
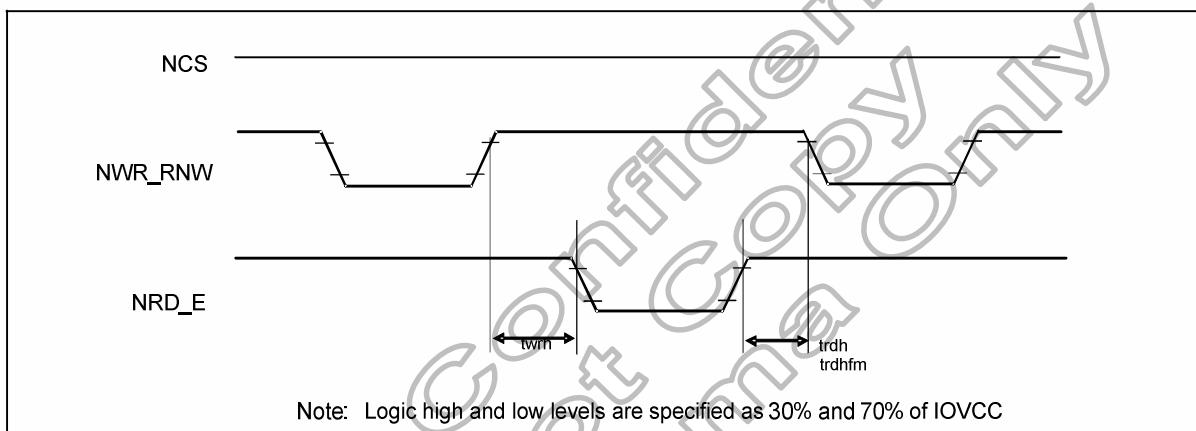


Table 7. 7 Parallel Interface characteristics (8080-series MPU)

**Figure 7. 2 Chip select timing****Figure 7. 3 Write to read and read to write timing**

7.5.2 Serial Interface Characteristics

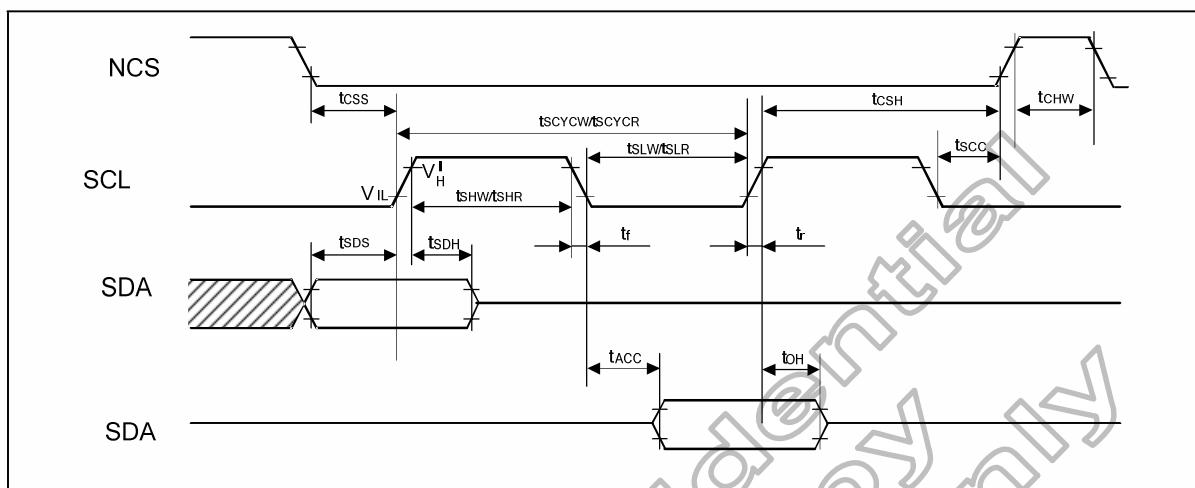


Figure 7. 4 Serial Interface Characteristics


(VSSA=0V, VDD1=1.65V to 2.50V, VDD=2.5V to 2.9V, Ta = -30 to 70°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Serial clock cycle (Write) SCL "H" pulse width (Write) SCL "L" pulse width (Write)	tscykw	SCL	66	-	-	
	tshw		15	-	-	ns
	tslw		15	-	-	
Data setup time (Write) Data hold time (Write)	tsds	SDA	10	-	-	ns
	tsdh		10	-	-	
Serial clock cycle (Read) SCL "H" pulse width (Read) SCL "L" pulse width (Read)	tscycr	SCL	150	-	-	
	tshr		60	-	-	ns
	tslr		60	-	-	
Access Time	tacc	SDA For maximum C _L =30pF For maximum C _L =8pF	10	-	50	ns
Output disable time	toh		15	-	50	ns
NCS "H" pulse width	tchw	NCS	40	-	-	ns
NCS-SCL time (write) NCS-SCL time (write)	tcss	NCS	15	-	-	ns
	tcsf		15	-	-	
NCS-SCL time (Read) NCS-SCL time (Read)	tcss	NCS	60	-	-	ns
	tcsf		65	-	-	

Note: The input signal rise time and fall time (tr, tf) is specified at 15 ns or less.

Logic high and low levels are specified as 30% and 70% of VDD1 for Input signals. For output, see Section 7.7.6.2

Input Signal Slope



Output Signal Slope




Table 7. 8 Serial Interface Characteristics

7.5.3 Reset Input Timing

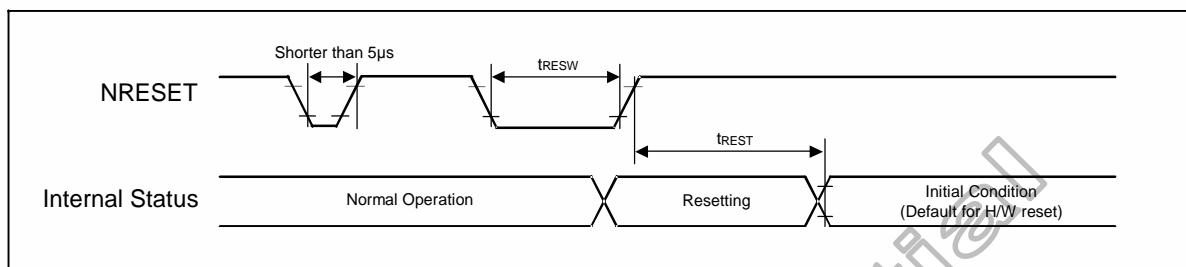


Figure 7.5 Reset input timing

Symbol	Parameter	Related Pins	Min.	Typ.	Max.	Note	Unit
tRESW	Reset low pulse width ⁽¹⁾	NRESET	10	-	-	-	μs
tREST	Reset complete time ⁽²⁾	-	-	-	5	When reset applied during Sleep In mode	ms
		-	-	-	120	When reset applied during Sleep Out mode	ms


Note: (1) Spike due to an electrostatic discharge on NRESET line does not cause irregular system reset according to the table below.

NRESET Pulse	Action
Shorter than 5μs	Reset Rejected
Longer than 10μs	Reset
Between 5 μs and 10μs	Reset Start

(2) During the resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out -mode. The display remains the blank state in Sleep In -mode) and then return to Default condition for H/W reset.

(3) During Reset Complete Time, ID2 value in OTP will be latched to internal register during this period. This loading is done every time when there is H/W reset complete time (tREST) within 5ms after a rising edge of NRESET.

(4) Spike Rejection also applies during a valid reset pulse as shown below:

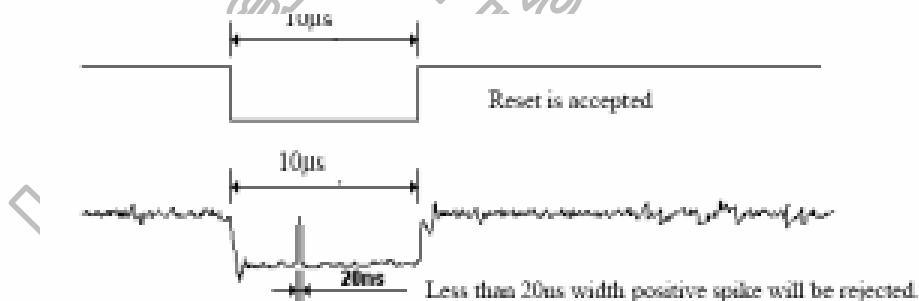


(5) It is necessary to wait 5msec after releasing NRESET before sending commands. Also Sleep Out command cannot be sent for 120msec.

Table 7.9

7.5.4 Measurement Conditions

7.5.4.1 tRATFM, tODH Measurement Condition

Measurement Condition Set-up

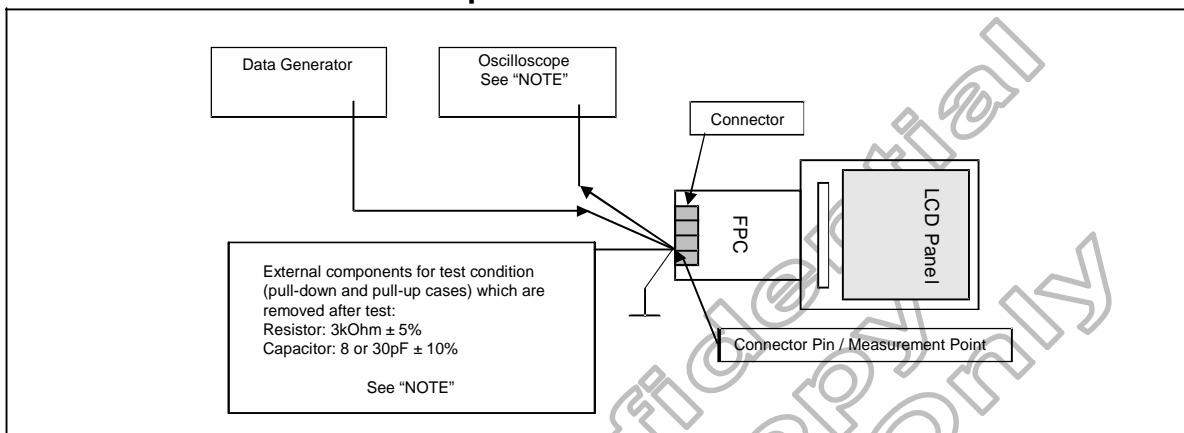

Note: Capacitances and resistances of the oscilloscope's probe must be included externals components in these Measurements

Figure 7.6

Minimum Value Measurement

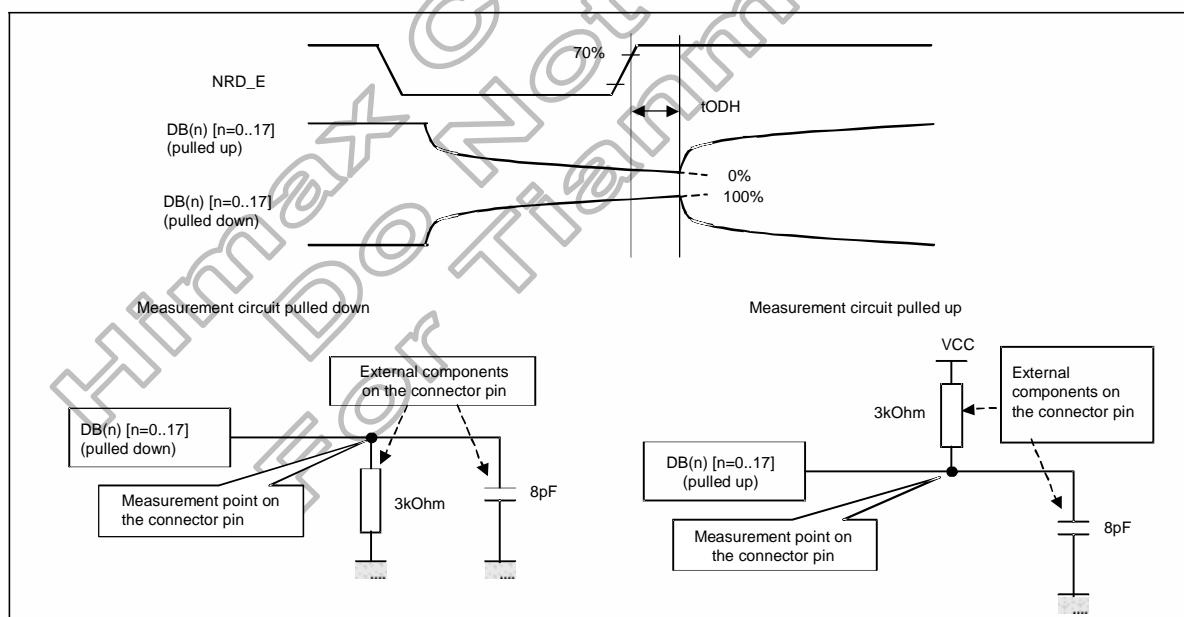


Figure 7.7

Maximum Value Measurement

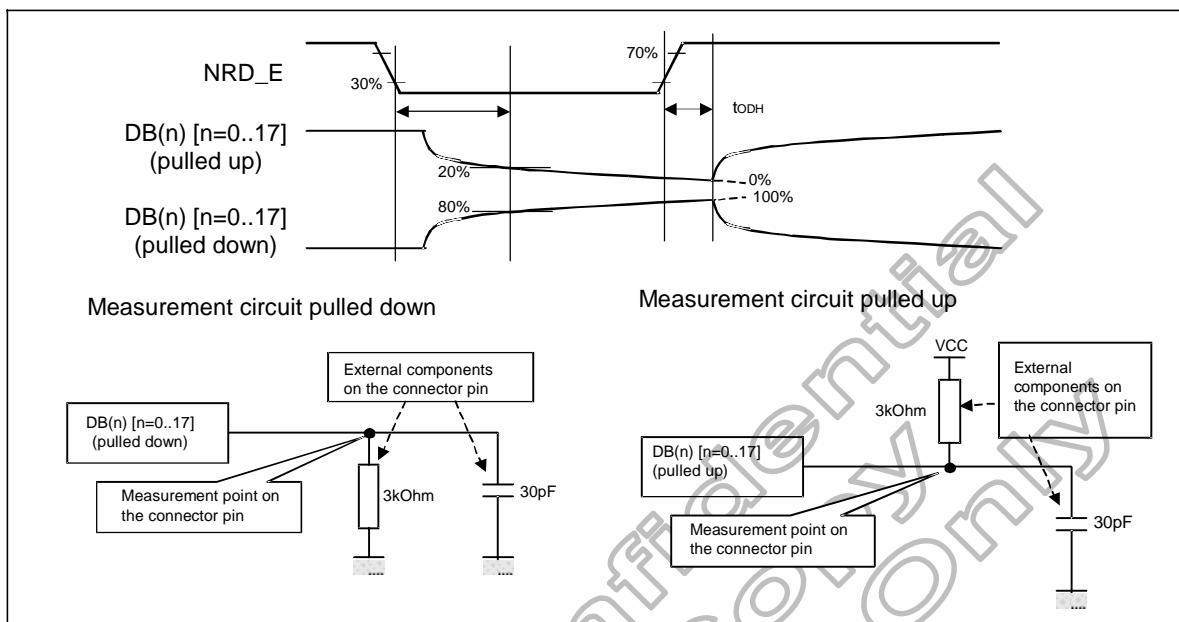


Figure 7.8

7.5.4.2 tACC, tOH Measurement Condition

Measurement Condition Set-up

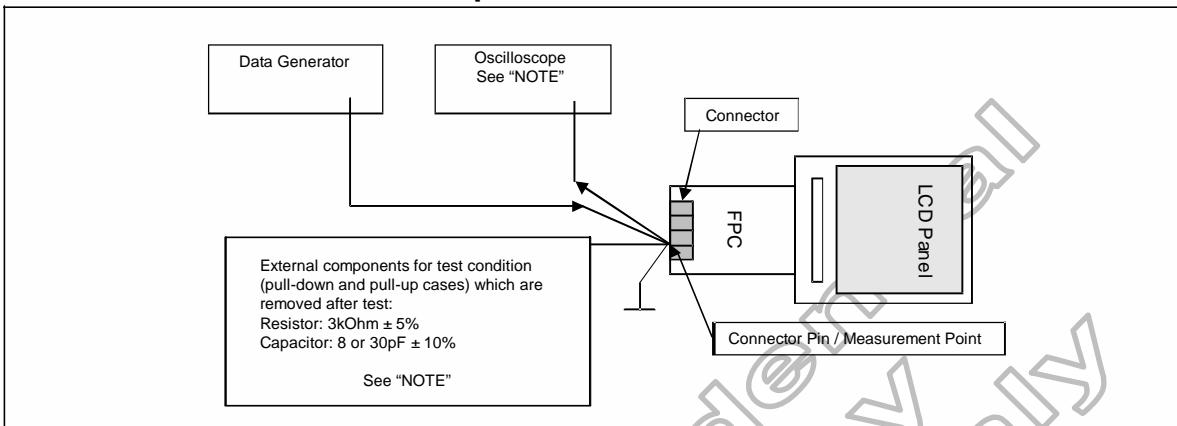


Figure 7.9

Minimum Value Measurement

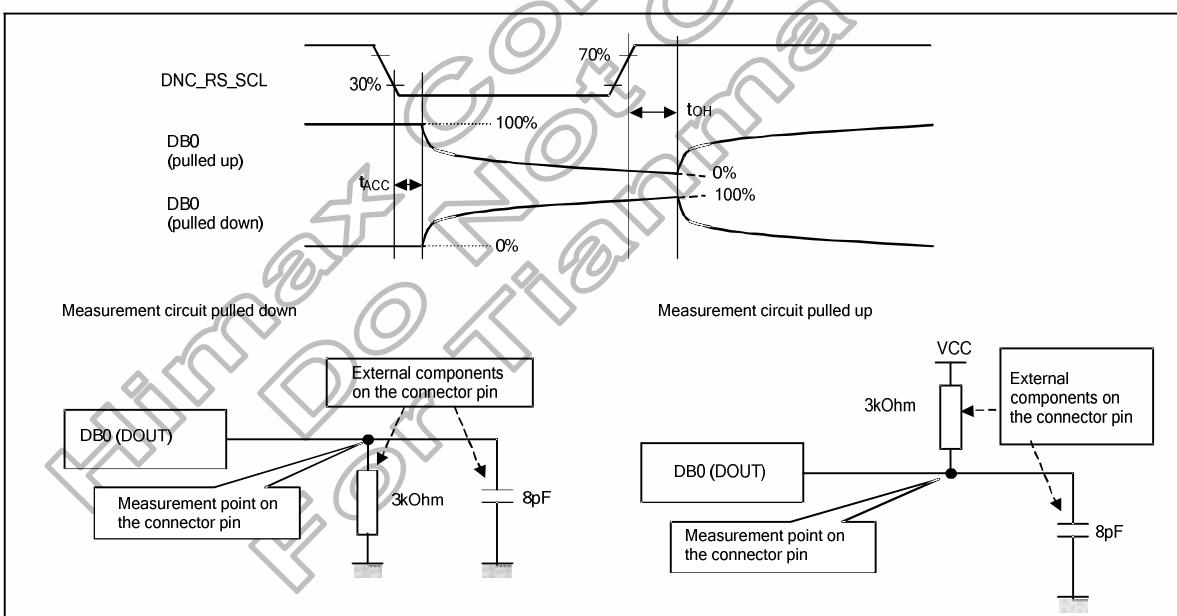


Figure 7.10

Maximum Value Measurement

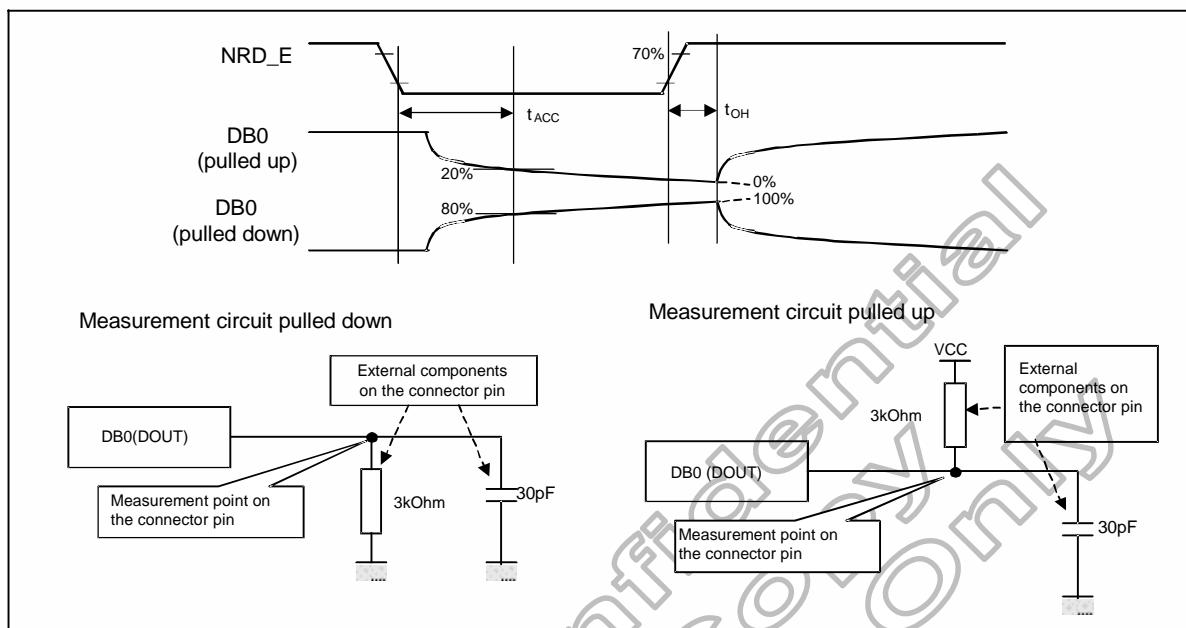


Figure 7.11

8. Reference Application

8.1 Example Connection with Panel

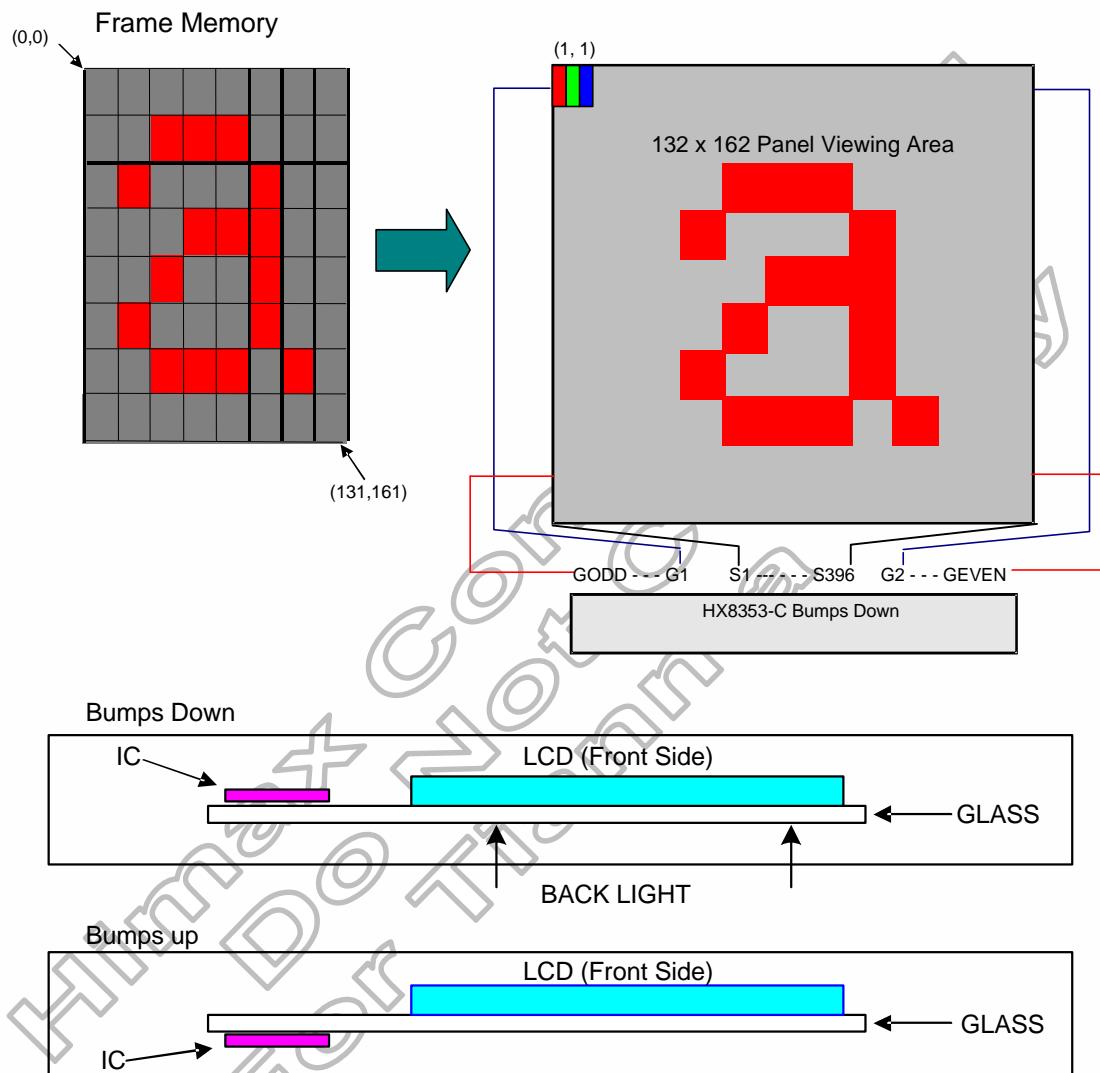


Figure 8. 1

8.2 Connection Example with External Components

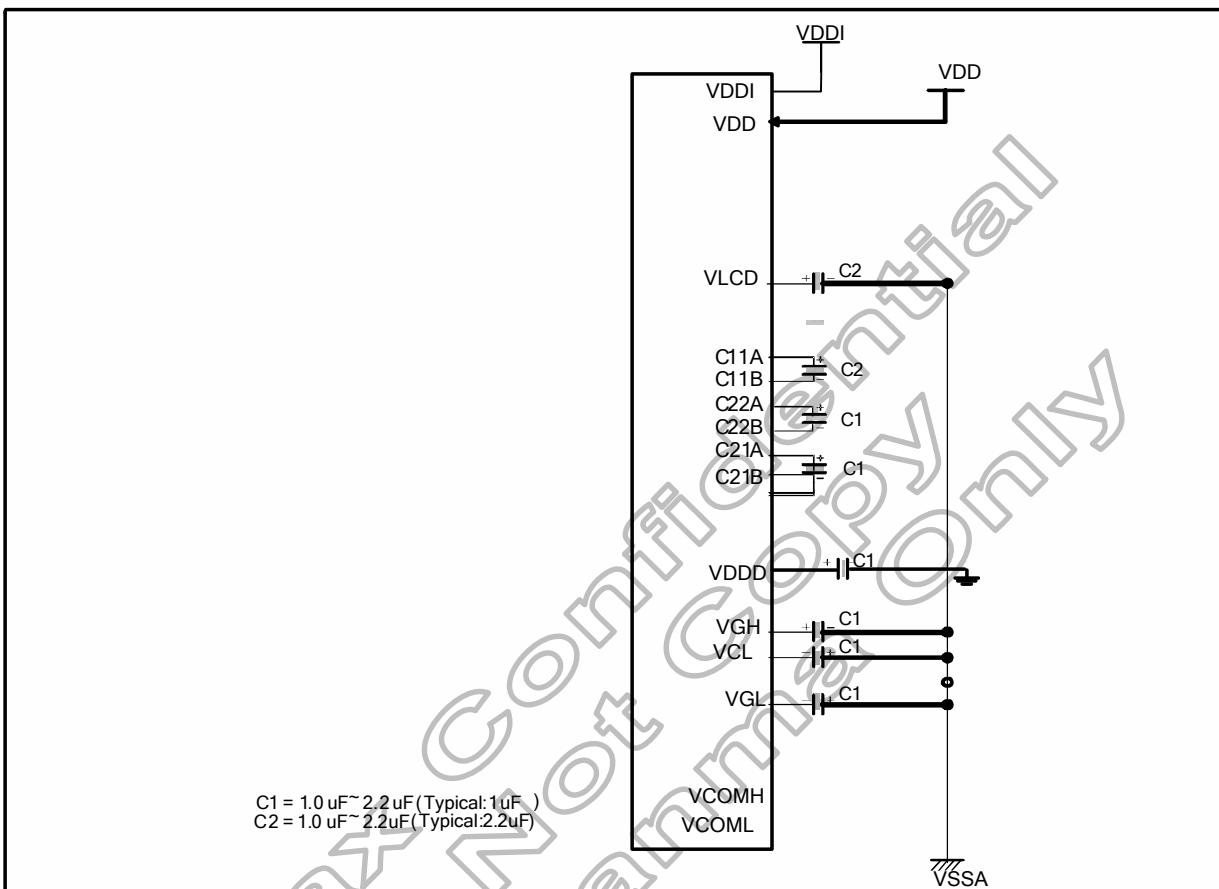


Figure 8. 2 Example connection with external components

8.3 External Components

Pad Name	Connection	Typical capacitance value
VGL	Connect to Capacitor (Max 16V): VGL ---(-)--- --- (+)---- VSSA	1.0µF
VCL	Connect to Capacitor (Max 5V): VCL ---(-)--- --- (+)---- VSSA	1.0µF
VDDD	Connect to Capacitor (Max 5V): VDDD ---(+)- - --- (-)---- VSSA	1.0µF
VGH	Connect to Capacitor (Max 21V): VGH ---(+)- - --- (-)---- VSSA	1.0µF
C21A, C21B	Connect to Capacitor (Max 7V): C21A ---(+)- - --- (-)----C21B	1.0µF
C22A, C22B	Connect to Capacitor (Max 7V): C22A,---(+)- - --- (-)----C22B	1.0µF
C11A, C11B	Connect to Capacitor (Max 5V): C11A ---(+)- - --- (-)----C11B	2.2µF
VLCD	Connect to Capacitor (Max 6V): VLCD ---(+)- - --- (-)----VSSA	1.0µF
VDD	VDD (Analogue Power)	Optional
VSSD	Connect to VSSD	-
VDDI	VDDI (Digital Power)	Optional
VSSD	VSSA (Ground)	-

Table 8. 1 Example capacitor connection

Pins connection	Recommended voltage	Capacity
VDD, VDDI, VCL, C11A/B, VDDD	6V	1 µF for 2.2uF (B characteristics)
VLCD, C21A/B, C22A/B,	10V	1 µF
VGH, VGL	25V	1 µF

Table 8. 2 Adoptability of Capacitor

Reusable	Pins to connect
> 200 kΩ	VcomR

Table 8. 3 Adoptability of Variable resistor

9. Layout Recommedacation

TBD

Himax Confidential
DO NOT Copy
For Tianma Only

10. Ordering Information

Part No.	Package
HX8353-C000PDxxx	TBD.

11. Revision History

Version	Date	Description of Changes
	2008/02/25	New setup
	2008/4/17	<ol style="list-style-type: none"> 1. Modify the 8.2 Connection Example with External Components (page 231) 2. Modify the 7.3 Maximum Series Resistance (page 219) 3. Mody the setting of VC1[2:0] and BT[3:0] (page 171 and page 172)
	2008/4/21	<ol style="list-style-type: none"> 1. Modify the 7.3 Maximum Series Resistance (page 219) 2. Add the voltage range of VCOMH, VCOML (page10)
	2008/4/22	<ol style="list-style-type: none"> 1. Modify the 4.5 Bump arrangement (page 22) 2. Modify the seal-ing =15um * 2 (page 16)
	2008/4/25	<ol style="list-style-type: none"> 1. Modify the Pin Coordinate,add description of input and output pin (page 18~21) 2. Modify the Bump arrangement,add pin number of input and output pin (page 23)
01	2008/4/29	<ol style="list-style-type: none"> 1. Modify Fig.5.53 BT[2:0] to BT[3:0] (page 85) 2. Modify table5.33 Master clock Frequency 10M to 1.5M (page 113) 3. Modify B2H(ISC) $f_{FLM} = 70\text{Hz}$ to $f_{FLM} = 60\text{Hz}$ (page 176) 4. Modify B4H(RTN,clock cycles perline) (page 179) 5. Modify address and resolution unmatch <ul style="list-style-type: none"> 5.3.1 SA,ML=1(page 52) 5.3.2 SA,RA(page 53) 5.3.6 SA,RA(page 57) 5.3.7 SA,RA(page 58) 6. Modify Alignment mark A1 and A2 (page17,page21) 7. Modify table 6.2 E7 and 6.4.29 E7 parameter (page 121, page206)
	2008/4/30	<ol style="list-style-type: none"> 1. Add description of input PIN (page 13 ,page 14) 2. Add description of BURN (page15)
	2008/5/07	<ol style="list-style-type: none"> 1. Modify VRH[3:0] setting (page 171, page 172) 2. Modify "Serial interface"(5.12) , when SPI_SEL pin high is 4 wire (page 40) 3. Modify Fig5.55 (page 86) 4. Modify Fig5.57 gamma stream,Table5.22, Table 5.23 and Table5.24 (page 90, page91) 5. Add 2nd parametet of C6h(page118, page196) 6. Modify register of B2h and E2h (page 175, page 201) 7. Remove bit5 function in B5h,E5h(page 181,page 204) 8. Remove E8h and F5h(page 199)

		9. Modify parameter4 of E0h 10. Modify table6.2 (page117~page122)
	2008/5/16	1. Modify 8.1Example Connection with Panel(page 228) 2. Modify "Voltage Calculation Formula", SumRP(SumRN)=124+....(page 92)
	2008/5/20	1. Modify "Page top" 132RGBx162 dot
	2008/5/21	1. 5.18 OTP Programming, in note2 ".... NAVILD bit will be changed to 1 " (page 106) 2. Programming seruence step9,modify "Specify OTP_index" read and write (page 109) 3. Modify B9H and BAH flow chart (page 186 and page187)

Himax Confidential
For Tianma
DO NOT Copy