

# NHD-12864AZ-FSW-GBW-VZ

## Graphic Liquid Crystal Display Module

|        |                                       |
|--------|---------------------------------------|
| NHD-   | Newhaven Display                      |
| 12864- | 128 x 64 pixels                       |
| AZ-    | Model                                 |
| F-     | Transflective                         |
| SW-    | Side White LED backlight              |
| G-     | STN- Gray                             |
| B-     | 6:00 View                             |
| W-     | Wide Temperature                      |
| VZ-    | With Built-in Negative Voltage Supply |
|        | <b>RoHS Compliant-8.8</b>             |

**Newhaven Display International, Inc.**

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

[www.newhavendisplay.com](http://www.newhavendisplay.com)

[nhtech@newhavendisplay.com](mailto:nhtech@newhavendisplay.com)

[nhsales@newhavendisplay.com](mailto:nhsales@newhavendisplay.com)


## Document Revision History

| Revision | Date     | Description  | Changed by |
|----------|----------|--|------------|
| 0        | 11/15/08 | Initial Release  | -          |
| 1        | 4/2/10   | User guide reformat                                    | BE         |
| 2        | 5/6/10   | Block diagram/initialization updated                   | BE         |
| 3        | 1/21/11  | Update Electrical Characteristics                      | JT         |
| 4        | 12/17/12 | Controller information updated                         | AK         |
| 5        | 8/24/17  | Mechanical Drawing, Electrical & Optical Char. Updated | SB         |

## Functions and Features

- 128x64 pixels
- Built-in NT7108C (or equivalent) controller
- +5.0V power supply
- 1/64 duty, 1/9 bias
- RoHS Compliant

# Mechanical Drawing

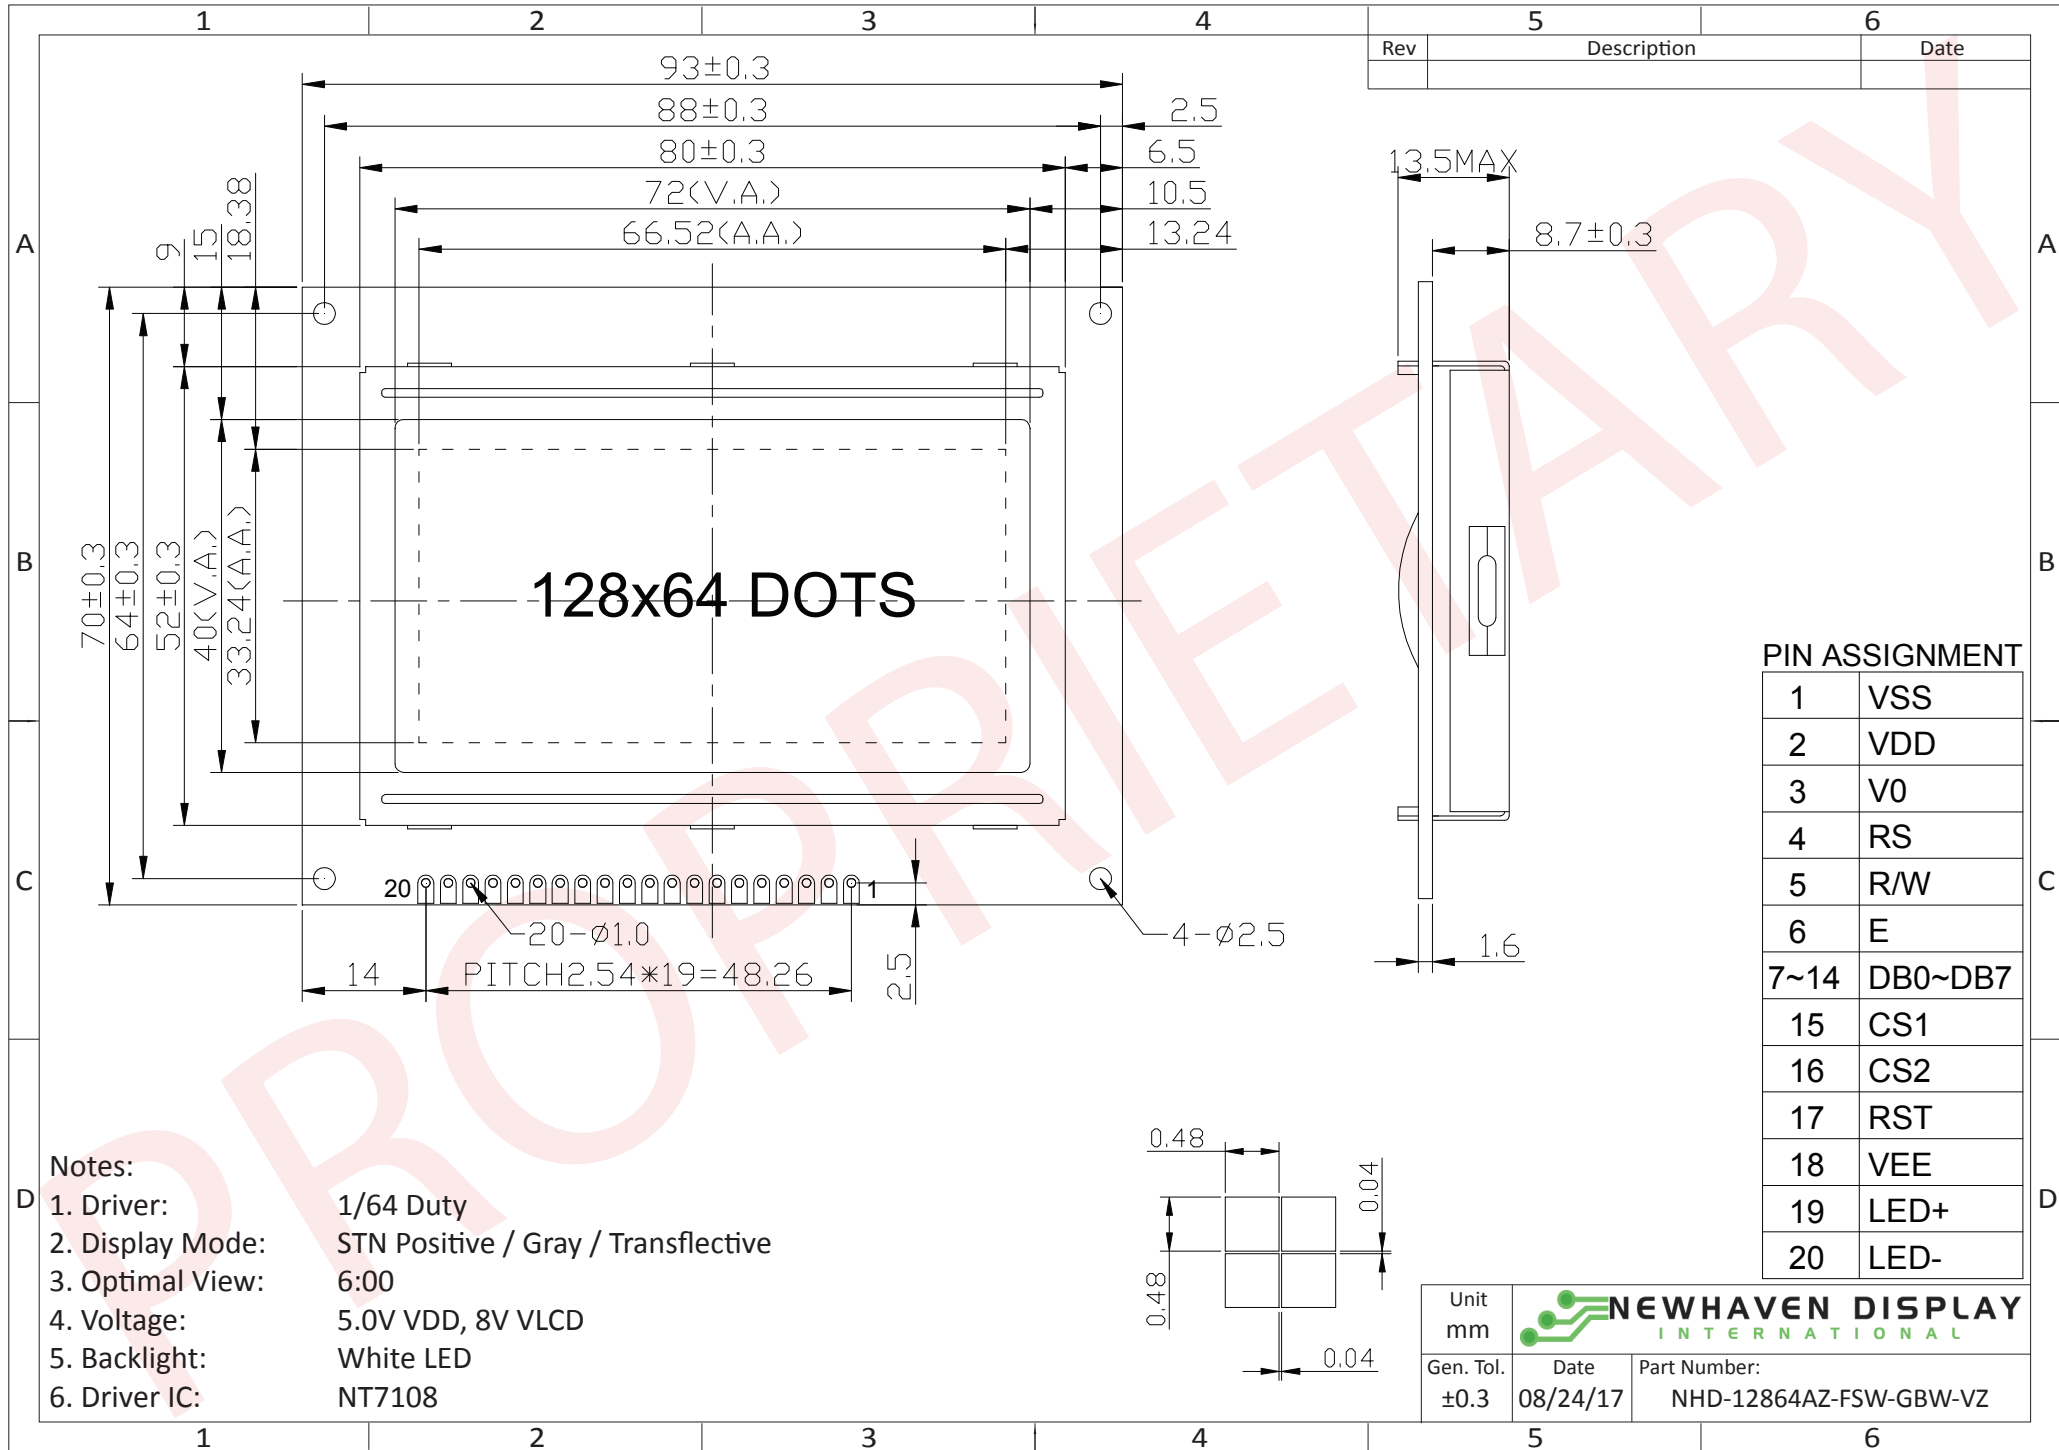

| Rev | Description | Date |
|-----|-------------|------|
|     |             |      |

### PIN ASSIGNMENT

|      |         |
|------|---------|
| 1    | VSS     |
| 2    | VDD     |
| 3    | V0      |
| 4    | RS      |
| 5    | R/W     |
| 6    | E       |
| 7~14 | DB0~DB7 |
| 15   | CS1     |
| 16   | CS2     |
| 17   | RST     |
| 18   | VEE     |
| 19   | LED+    |
| 20   | LED-    |

- Notes:**
- 1. Driver: 1/64 Duty
  - 2. Display Mode: STN Positive / Gray / Transflective
  - 3. Optimal View: 6:00
  - 4. Voltage: 5.0V VDD, 8V VLCD
  - 5. Backlight: White LED
  - 6. Driver IC: NT7108


|                   |   |  |
|-------------------|---|--|
| Unit<br>mm        |  |  |
| Gen. Tol.<br>±0.3 | Date<br>08/24/17  | Part Number:<br>NHD-12864AZ-FSW-GBW-VZ |

## Pin Description and Wiring Diagram

| Pin No. | Symbol          | External Connection | Function Description  |
|---------|-----------------|---------------------|---|
| 1       | V <sub>SS</sub> | Power Supply        | Ground  |
| 2       | V <sub>DD</sub> | Power Supply        | Supply Voltage for Logic (+5.0V)  |
| 3       | V <sub>0</sub>  | Adj. Power Supply   | Supply Voltage for Contrast (approx. -3.2V)   |
| 4       | RS              | MPU                 | Register Select: 1=Data, 0=Instruction  |
| 5       | R/W             | MPU                 | Read/Write select signal, R/W=1: Read R/W: =0: Write  |
| 6       | E               | MPU                 | Operation Enable signal. Falling edge triggered.  |
| 7-14    | DB0-DB7         | MPU                 | This is an 8-bit Bi-directional data bus  |
| 15      | CS1B            | MPU                 | Chip Selection: CS1=H, CS2=L → select IC1 (left side)<br>CS1=L, CS2=H → select IC2 (right side) |
| 16      | CS2B            | MPU                 |   |
| 17      | /RES            | MPU                 | Active LOW Reset signal   |
| 18      | VEE             | Power Supply        | Negative voltage output (-10V)  |
| 19      | LED+            | Power Supply        | Backlight Anode (+5V Via On Board Resistor)   |
| 20      | LED-            | Power Supply        | Backlight Cathode   |

Recommended LCD connector: 2.54mm pitch pins

Backlight connector: ----

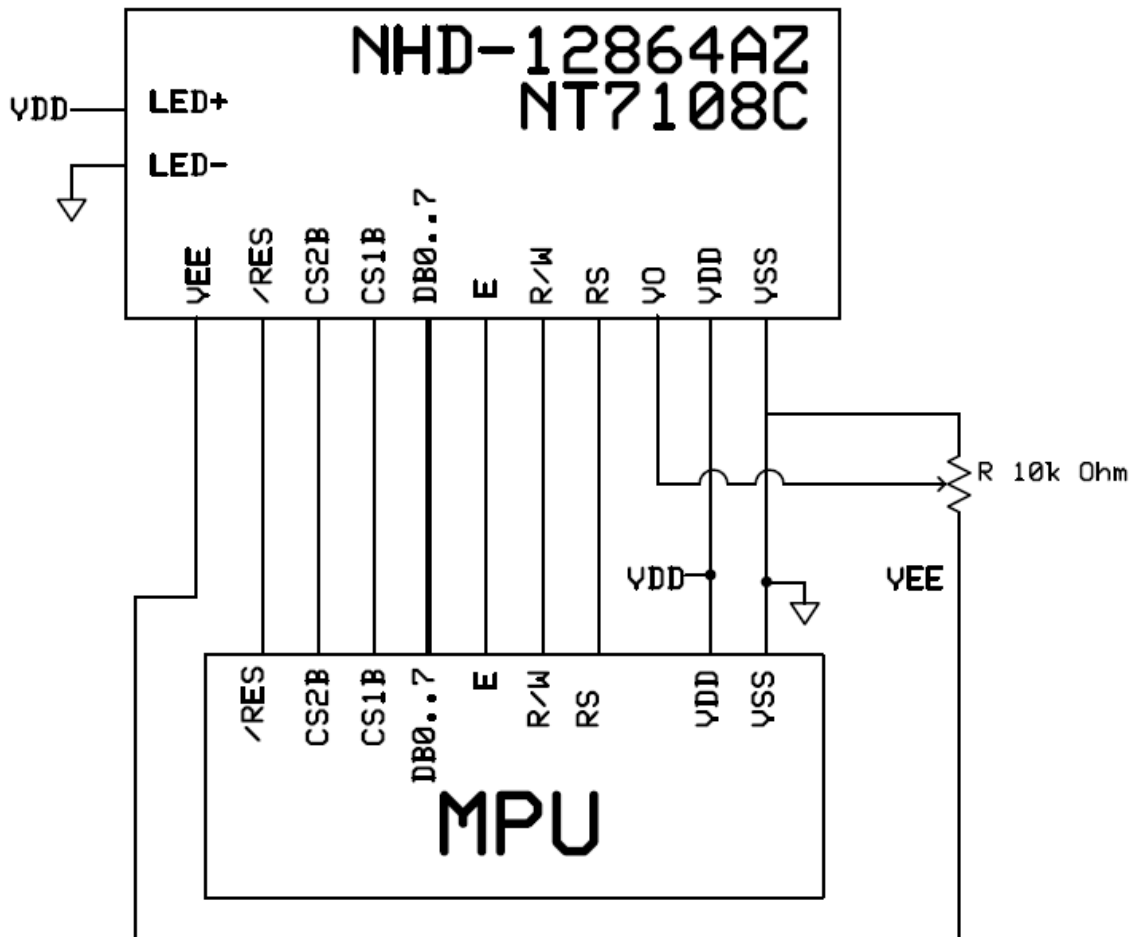

## Electrical Characteristics

| Item                        | Symbol    | Condition                                 | Min.           | Typ. | Max.           | Unit |
|-----------------------------|-----------|---|----------------|------|----------------|------|
| Operating Temperature Range | $T_{OP}$  | Absolute Max                              | -20            | -    | +70            | °C   |
| Storage Temperature Range   | $T_{ST}$  | Absolute Max                              | -30            | -    | +80            | °C   |
| Supply Voltage              | $V_{DD}$  | -   | 4.8            | 5.0  | 5.2            | V    |
| Supply Current              | $I_{DD}$  | $V_{DD} = 5.0V$<br>$T_{OP} = 25^{\circ}C$ | 1.0            | 3.0  | 5.0            | mA   |
| Supply for LCD (contrast)   | $V_{LCD}$ |   | 8.0            | 8.7  | 8.9            | V    |
| "H" Level input             | $V_{IH}$  | -   | $0.7 * V_{DD}$ | -    | $V_{DD}$       | V    |
| "L" Level input             | $V_{IL}$  | -   | $V_{SS}$       | -    | $0.3 * V_{DD}$ | V    |
| "H" Level output            | $V_{OH}$  | -   | 2.4            | -    | $V_{DD}$       | V    |
| "L" Level output            | $V_{OL}$  | -   | $V_{SS}$       | -    | 0.4            | V    |
| Backlight Supply Voltage    | $V_{LED}$ | -   | 4.8            | 5.0  | 5.2            | V    |
| Backlight Supply Current    | $I_{LED}$ | $V_{LED} = 5.0V$                          | 15             | 30   | 40             | mA   |

## Optical Characteristics

| Item                   | Symbol | Condition              | Min. | Typ. | Max. | Unit |
|------------------------|--------|------------------------|------|------|------|------|
| Optimal Viewing Angles | Top    | $CR \geq 2$            | -    | 30   | -    | °    |
|                        | Bottom |                        | -    | 50   | -    | °    |
|                        | Left   |                        | -    | 50   | -    | °    |
|                        | Right  |                        | -    | 50   | -    | °    |
| Contrast Ratio         | CR     | -                      | 2    | 5    | -    | -    |
| Response Time          | Rise   | $T_{OP} = 25^{\circ}C$ | -    | 150  | 250  | ms   |
|                        | Fall   |                        | -    | 200  | 300  | ms   |

## Controller Information


Built-in NT7108C controller.

Please download specification at [http://www.newhavendisplay.com/app\\_notes/NT7108.pdf](http://www.newhavendisplay.com/app_notes/NT7108.pdf)

## Table of Commands

| Instruction                    | RS | R/W | DB7        | DB6 | DB5                       | DB4   | DB3 | DB2        | DB1 | DB0 | Function  |   |
|--------------------------------|----|-----|------------|-----|---------------------------|-------|-----|------------|-----|-----|---|---|
| Display on/off                 | L  | L   | L          | L   | H                         | H     | H   | H          | H   | L/H | Controls the display on or off. Internal status and display RAM data is not affected.<br>L:OFF, H:ON                      |   |
| Set address (Y address)        | L  | L   | L          | H   | Y address (0-63)          |       |     |            |     |     | Sets the Y address in the Y address counter.  |   |
| Set page (X address)           | L  | L   | H          | L   | H                         | H     | H   | Page (0-7) |     |     | Sets the X address at the X address register.   |   |
| Display Start line (Z address) | L  | L   | H          | H   | Display start line (0-63) |       |     |            |     |     | Indicates the display data RAM displayed at the top of the screen.  |   |
| Status read                    | L  | H   | Busy       | L   | On/Off                    | Reset | L   | L          | L   | L   | Read status.<br>BUSY L: Ready<br>H: In operation<br>ON/OFF L: Display ON<br>H: Display OFF<br>RESET L: Normal<br>H: Reset |   |
| Write display data             | H  | L   | Write data |     |                           |       |     |            |     |     |   | Writes data (DB0: 7) into display data RAM. After writing instruction, Y address is increased by 1 automatically. |
| Read display data              | H  | H   | Read data  |     |                           |       |     |            |     |     |   | Reads data (DB0: 7) from display data RAM to the data bus.  |

## Timing Characteristics

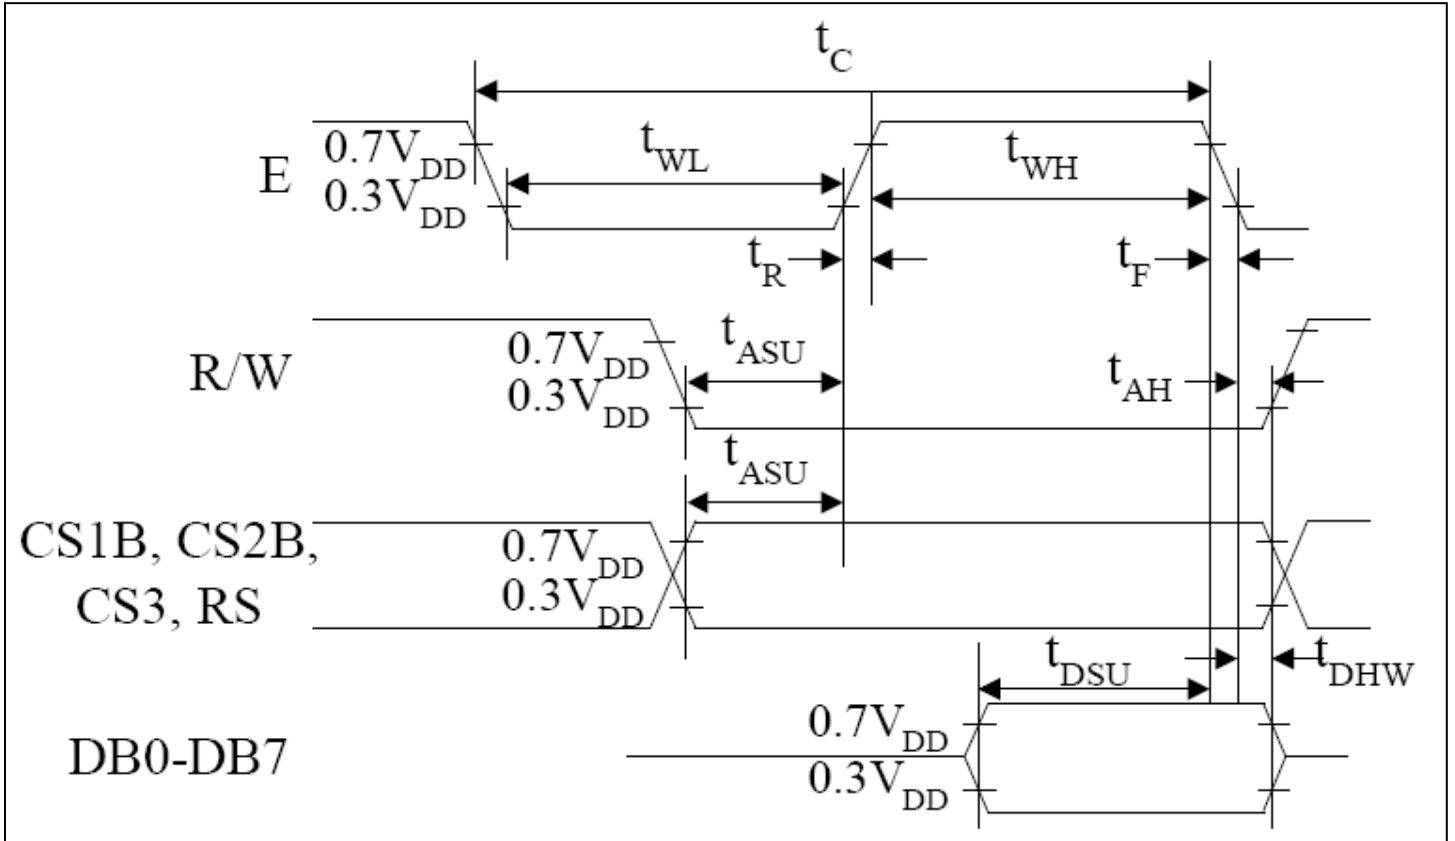

| Characteristic         | Symbol    | Min  | Type | Max | Unit |
|------------------------|-----------|------|------|-----|------|
| E cycle                | $t_c$     | 1000 | -    | -   | ns   |
| E high level width     | $t_{WH}$  | 450  | -    | -   |      |
| E low level width      | $t_{WL}$  | 450  | -    | -   |      |
| E rise time            | $t_R$     | -    | -    | 25  |      |
| E fall time            | $t_F$     | -    | -    | 25  |      |
| Address set-up time    | $t_{ASU}$ | 140  | -    | -   |      |
| Address hold time      | $t_{AH}$  | 10   | -    | -   |      |
| Data set-up time       | $t_{DSU}$ | 200  | -    | -   |      |
| Data delay time        | $t_D$     | -    | -    | 320 |      |
| Data hold time (write) | $t_{DHW}$ | 10   | -    | -   |      |
| Data hold time (read)  | $t_{DHR}$ | 20   | -    | -   |      |

## Example Initialization Program

```
'-----  
'DB0-DB7  7-14          P1  
'CS2      16           P3.6  
'CS1      15           P3.1  
'RST      17           P3.2  
'R/W      5            P3.7  
'D/I      4            P3.0  
'E        6            P3.4  
'-----
```

```
Sub Init
```

```
Reset P3.2
```

```
Set P3.2
```

```
Reset P3.4
```

```
Reset P3.0
```

```
Reset P3.7
```

```
Reset P3.6
```

```
Reset P3.1
```

```
A = &H3F
```

```
Call Comleft
```

```
'display on
```

```
Call Comright
```

```
'display on
```

```
End Sub
```

```
'-----  
Sub Comleft
```

```
P1 = A
```

```
Set P3.6
```

```
Reset P3.0
```

```
Set P3.4
```

```
Reset P3.4
```

```
Reset P3.6
```

```
End Sub
```

```
Sub Comright
```

```
P1 = A
```

```
Set P3.1
```

```
Reset P3.0
```

```
Set P3.4
```

```
Reset P3.4
```

```
Reset P3.1
```

```
End Sub
```

```
Sub Writeleft
```

```
P1 = A
```

```
Set P3.6
```

```
Set P3.0
```

```
Set P3.4
```

```
Reset P3.4
```

```
Reset P3.6
```

```
End Sub
```

```
Sub Writerright
```

```
P1 = A
```

```
Set P3.1
```

```
Set P3.0
```

```
Set P3.4
```

```
Reset P3.4
```

```
Reset P3.1
```

```
End Sub
```



## Quality Information

| Test Item                             | Content of Test   | Test Condition  | Note |
|---------------------------------------|---|---|------|
| High Temperature storage              | Endurance test applying the high storage temperature for a long time.   | +80°C , 48hrs   | 2    |
| Low Temperature storage               | Endurance test applying the low storage temperature for a long time.  | -30°C , 48hrs   | 1,2  |
| High Temperature Operation            | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.                    | +70°C , 48hrs   | 2    |
| Low Temperature Operation             | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.                     | -20°C , 48hrs   | 1,2  |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +40°C , 90% RH , 48hrs  | 1,2  |
| Thermal Shock resistance              | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.                  | 0°C,30min -> 25°C,5min -> 50°C,30min = 1 cycle<br>10 cycles                         |      |
| Vibration test                        | Endurance test applying vibration to simulate transportation and use.   | 10-55Hz , 15mm amplitude.<br>60 sec in each of 3 directions X,Y,Z<br>For 15 minutes | 3    |
| Static electricity test               | Endurance test applying electric static discharge.  | VS=800V, RS=1.5kΩ, CS=100pF<br>One time   |      |

**Note 1:** No condensation to be observed.

**Note 2:** Conducted after 4 hours of storage at 25°C, 0%RH.

**Note 3:** Test performed on product itself, not inside a container.

## Precautions for using LCDs/LCMs

See Precautions at [www.newhavendisplay.com/specs/precautions.pdf](http://www.newhavendisplay.com/specs/precautions.pdf)

## Warranty Information and Terms & Conditions

[http://www.newhavendisplay.com/index.php?main\\_page=terms](http://www.newhavendisplay.com/index.php?main_page=terms)