



VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2006.07.11		First issue

W: for Newhaven graphic LCD version "W"

I: Voltage inverter

CCFL: for CCFL backlight

4: version 4 = 5Vdc in, 220Vrms out

#: RoHS compliant

## 1. GENERAL

This specification is applied to WICCFL4# as driver for CCFL.

## 2. INPET CHARACTERISTICS

Parameter	Symbol	Min	Nom	Max	Unit	Remark
Input Voltage	V <sub>in</sub>	4.5	5.0	5.5	V	
Input Current	I <sub>in</sub>	—	—	450	mA	V <sub>in</sub> =5V
Input Power	P <sub>in</sub>	—	2.25	—	W	V <sub>in</sub> =5V

## 3. Output Characteristics

Parameter	Symbol	Min	Nom	Max	Unit	Remark
Output Voltage	V <sub>o</sub>		220		V <sub>rms</sub>	V <sub>in</sub> =5.0V
Start Voltage	V <sub>v</sub>	400	500	600		
Tube Current	I <sub>L</sub>	5.2	5.7	6.2	mA	V <sub>in</sub> =5.0V
Working Frequency	f	32	35	42	KHz	
Life Time	Hrs.		20,000		Hrs	DC 5.5V continue

NOTE: All conditions are at 25°C ambient unless otherwise specified.

## 4. General Specification

a. Temperature operating : -10~85°C



b. Temperature storage : -20~85°C

C. Humidity operating : -10~95%RH

D. Humidity storage : -20~95%RH

# WICCFL4

## DIMENSION

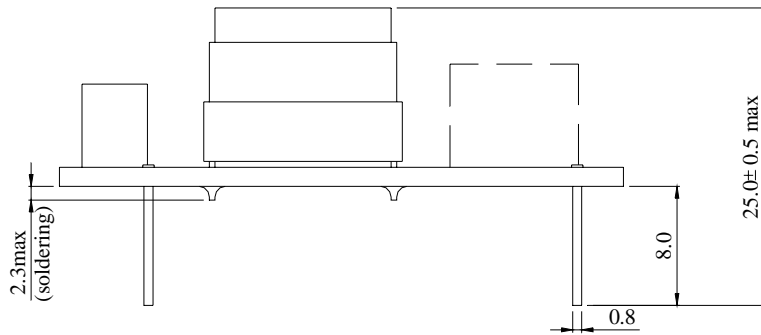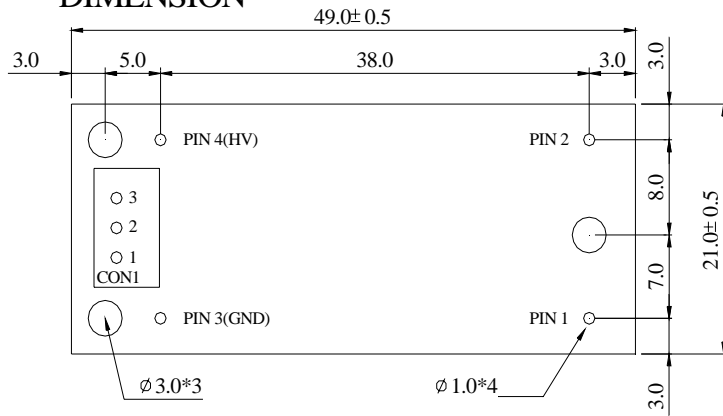

## PIN ASSIGNMENT

UNIT: mm

### INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	V+
PIN 2	GND

### OUTPUT(CON1) CONNECTOR 2532-03

PIN NUMBER	FUNCTION
1	GND
2	NC
3	HV

The non-specified tolerance of dimension is  $\pm 0.3\text{mm}$