

Product Specification

NHD-2.8-240320AF-CSXP-F

TFT Liquid Crystal Display

NHD-	Newhaven Display
2.8-	2.8" Diagonal
240320-	240xRGBx320 Pixels
AF-	Model
C-	Built-in Controller
S-	High Brightness, White LED Backlight
X-	TFT
P-	IPS, Wide Temperature
F-	FFC ZIF Connection Style

Table of Contents

Document Revision History.....	2
Mechanical Drawing	3
Pin Description	4
Interface Selection.....	4
Wiring Diagram	5
Electrical Characteristics	6
Optical Characteristics	6
Controller Information.....	6
Table of Commands	6
Timing Characteristics for TFT	7
Example Initialization Code.....	11
Quality Information	13

Additional Resources




- **Support Forum:** <https://support.newhavendisplay.com/hc/en-us/community/topics>
- **GitHub:** <https://github.com/newhavendisplay>
- **Example Code:** <https://support.newhavendisplay.com/hc/en-us/categories/4409527834135-Example-Code/>
- **Knowledge Center:** https://www.newhavendisplay.com/knowledge_center.html
- **Quality Center:** https://www.newhavendisplay.com/quality_center.html
- **Precautions for using LCDs/LCMs:** <https://www.newhavendisplay.com/specs/precautions.pdf>
- **Warranty / Terms & Conditions:** <https://www.newhavendisplay.com/terms.html>



Document Revision History

Revision	Date	Description	Changed By
0	01/18/20019	Initial Release	PB
1	02/19/2019	Supply Voltage Updated	SB
2	12/09/2019	Interface Information Updated (8080-II)	SM
3	07/21/2020	Updated 2D Mechanical Drawing; Kapton Tape on Golden Fingers	AS
4	03/07/2022	Updated Mechanical Drawing, Optical Characteristics, and Quality Information	CJ
5	06/26/2023	Date Code Format Updated on Mechanical Drawing	KL
6	09/05/2023	Mechanical Drawing and V _{DD} /IOV _{DD} Supply Voltage Range Updated	KL
7	12/05/2024	FPC Redesigned to add SPI. Backlight Redesigned for 1000cd/m ² Part Revision Upgraded to Rev1B	KL
8	03/05/2025	Optical Characteristics and Mechanical Drawing Updated	KL
9	7/11/2025	Typo Corrected for pins 2-5 in Pin Description Table	KL

Mechanical Drawing

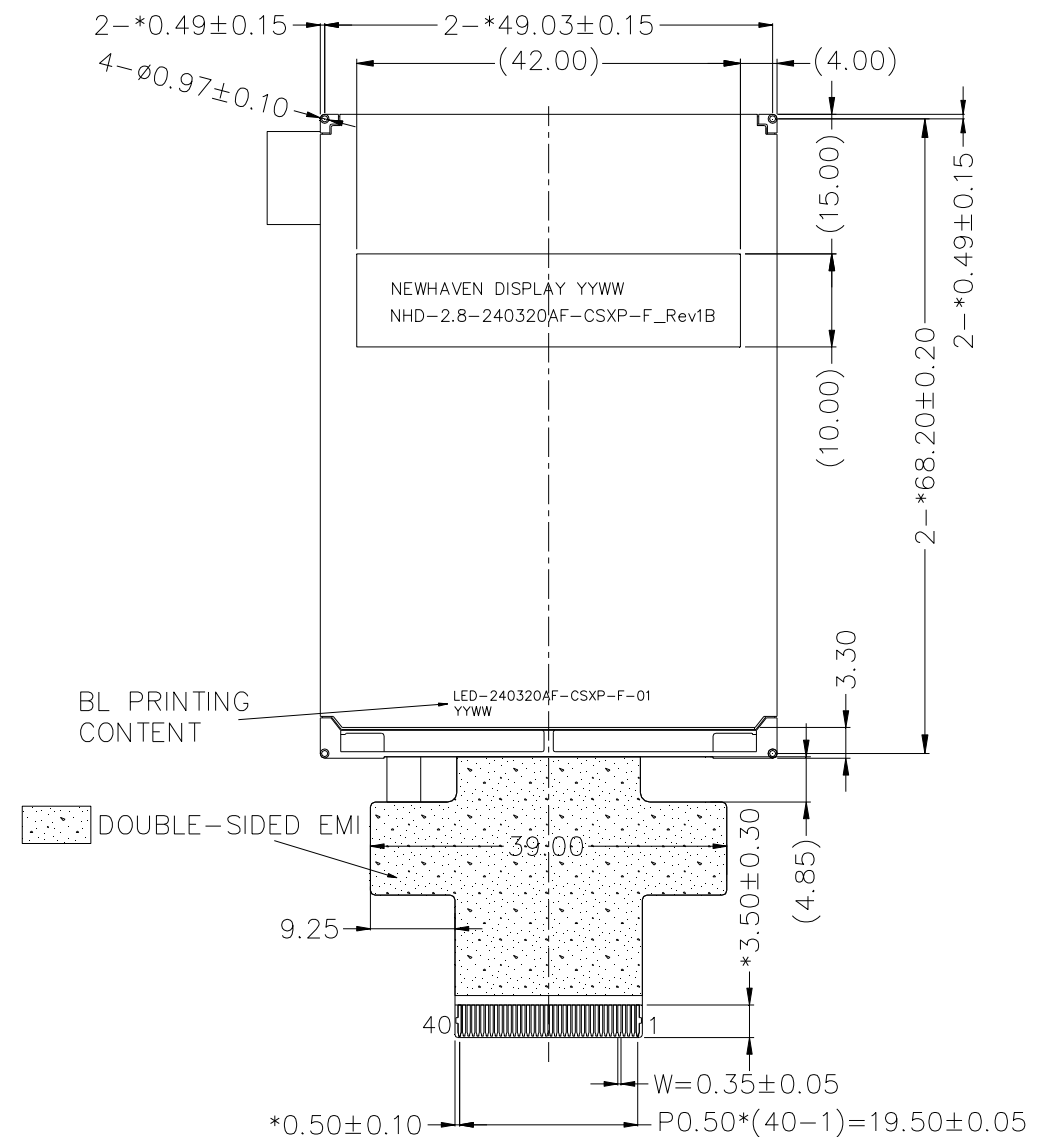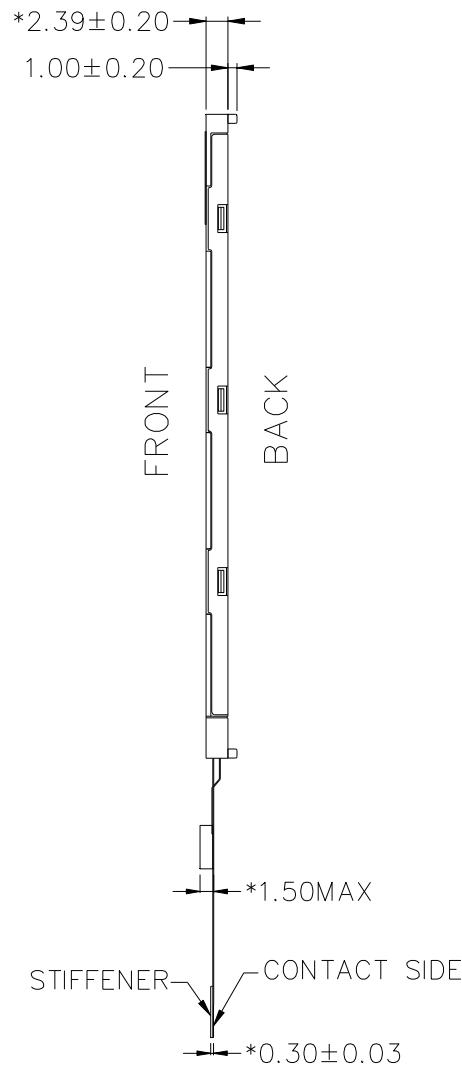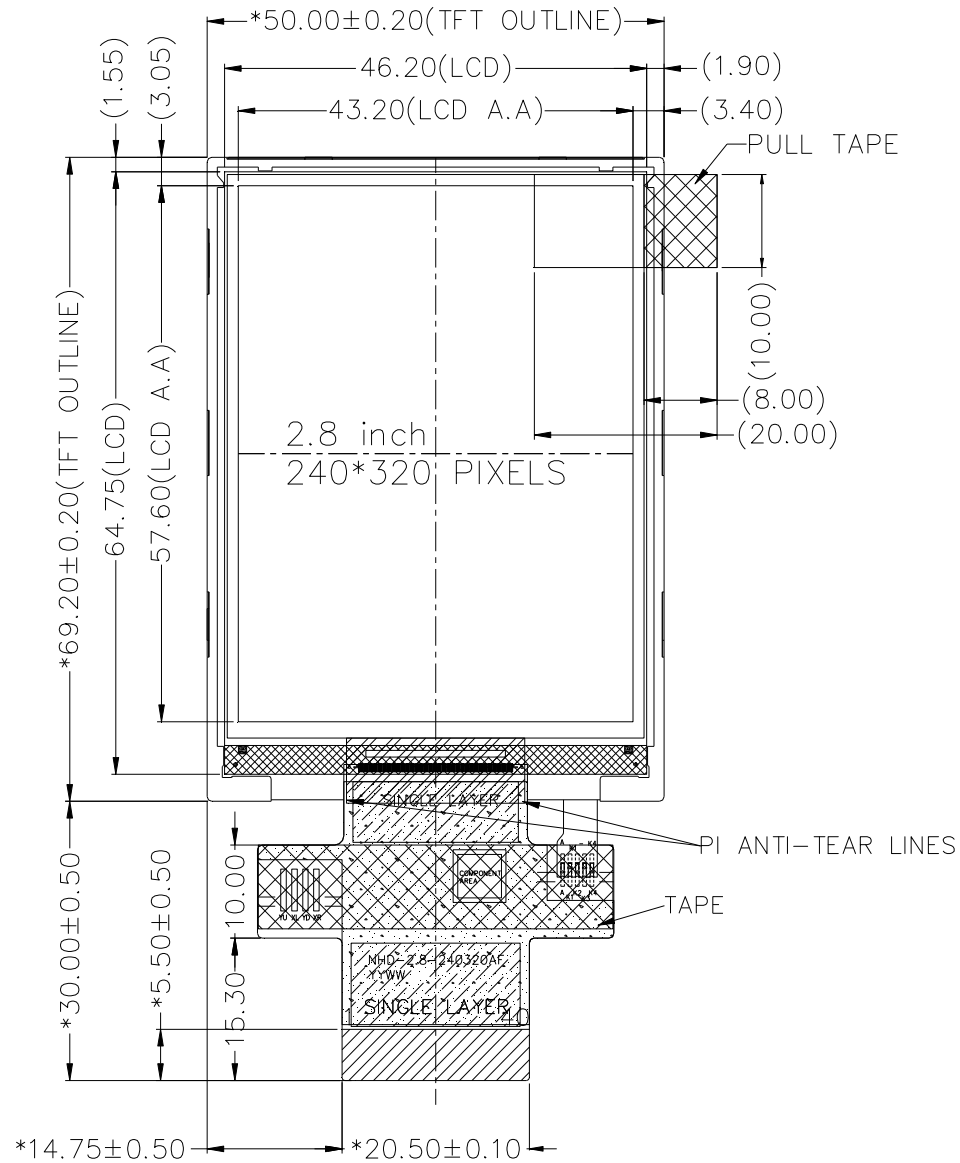

Pin No.	Symbol
1	GND
2	NC
3	NC
4	NC
5	NC
6	SDO
7	VDD
8	VDDI
9	SDA
10	CSX
11	DCX
12	WRX
13	RDX
14	DB0
15	DB1
16	DB2
17	DB3
18	DB4
19	DB5
20	DB6
21	DB7
22	DB8
23	DB9
24	DB10
25	DB11
26	DB12
27	DB13
28	DB14
29	DB15
30	/RES
31	IM0
32	IM1
33	IM2
34	LED-K1
35	LED-K2
36	LED-K3
37	LED-K4
38	LED-A
39	GND
40	TE

Product Description: 2.8" 240x320 IPS TFT


1. Driver IC: ST7789VI

2. Interface: 8/16-bit Parallel, 3/4-wire SPI

3. Power Requirement: 3.3V TFT, 3.1V/160mA Backlight

4. Optical Features: Normally Black, Transmissive, Anti-Glare, 1000cd/m²

5. Recommended FFC Connector: 40pin 0.5mm pitch; Ex. Molex 54132-4062

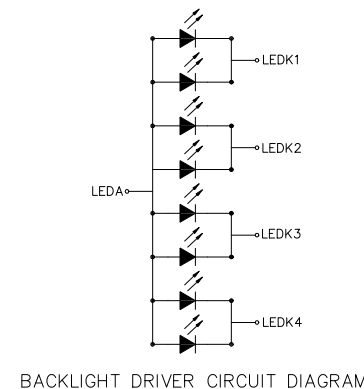

Standard Tolerance: (Unless otherwise specified)		NEWHAVEN DISPLAY INTERNATIONAL	
Linear: ±0.3mm		Drawing/Part Number: NHD-2.8-240320AF-CSXP-F	Revision: 1B
Unless otherwise specified: • Dimensions are in Millimeters • Third Angle Projection		Drawn By: K. Lewis Drawn Date: 07/11/2025	Approved By: K. Lewis Approved Date: 07/11/2025
This drawing is solely the property of Newhaven Display International, Inc. The information it contains is not to be disclosed, reproduced or copied in whole or part without written approval from Newhaven Display.			

Pin Description

Pin No.	Symbol	External Connection	Function Description
1	GND	Power Supply	Ground
2	NC	-	No Connect
3	NC	-	No Connect
4	NC	-	No Connect
5	NC	-	No Connect
6	SDO	MPU	Serial Data Output
7	VDD	Power Supply	Supply Voltage for LCD (3.3V)
8	VDDI	Power Supply	Supply Voltage for Logic
9	SDA	MPU	Serial Data Input
10	CSX	MPU	Active LOW Chip Select signal
11	DCX	MPU	Parallel Interface: Data / Command selection: '1' = Data ; '0' = Command Serial Interface: Serial Clock Signal
12	WRX	MPU	Active LOW Write signal
13	RDX	MPU	Active LOW Read signal
14	DB0	MPU	Bi-directional data bus 8-bit: use DB8-DB15 16-bit: use DB0-DB15
15	DB1	MPU	
16	DB2	MPU	
17	DB3	MPU	
18	DB4	MPU	
19	DB5	MPU	
20	DB6	MPU	
21	DB7	MPU	
22	DB8	MPU	
23	DB9	MPU	
24	DB10	MPU	
25	DB11	MPU	
26	DB12	MPU	
27	DB13	MPU	
28	DB14	MPU	
29	DB15	MPU	
30	/RES	MPU	Active LOW Reset signal
31	IM0	MPU	Interface Mode Select
32	IM1	MPU	Interface Mode Select
33	IM2	MPU	Interface Mode Select
34	LED-K1	Power Supply	Backlight Cathode (Ground)
35	LED-K2	Power Supply	Backlight Cathode (Ground)
36	LED-K3	Power Supply	Backlight Cathode (Ground)
37	LED-K4	Power Supply	Backlight Cathode (Ground)
38	LED-A	Power Supply	Backlight Anode (100mA @ 3.1V)
39	GND	Power Supply	Ground
40	TE	MPU	Tearing Effect Output

Recommended LCD connector: 40-pin, 0.5mm pitch FFC connector


Molex P/N: 54132-4062 or similar

Interface Selection

Pin Name	8-bit 8080-II Parallel	16-bit 8080-II Parallel	3- wire SPI	4-wire SPI
IM0	1	0	1	0
IM1	0	0	0	1
IM2	0	0	1	1



Wiring Diagram

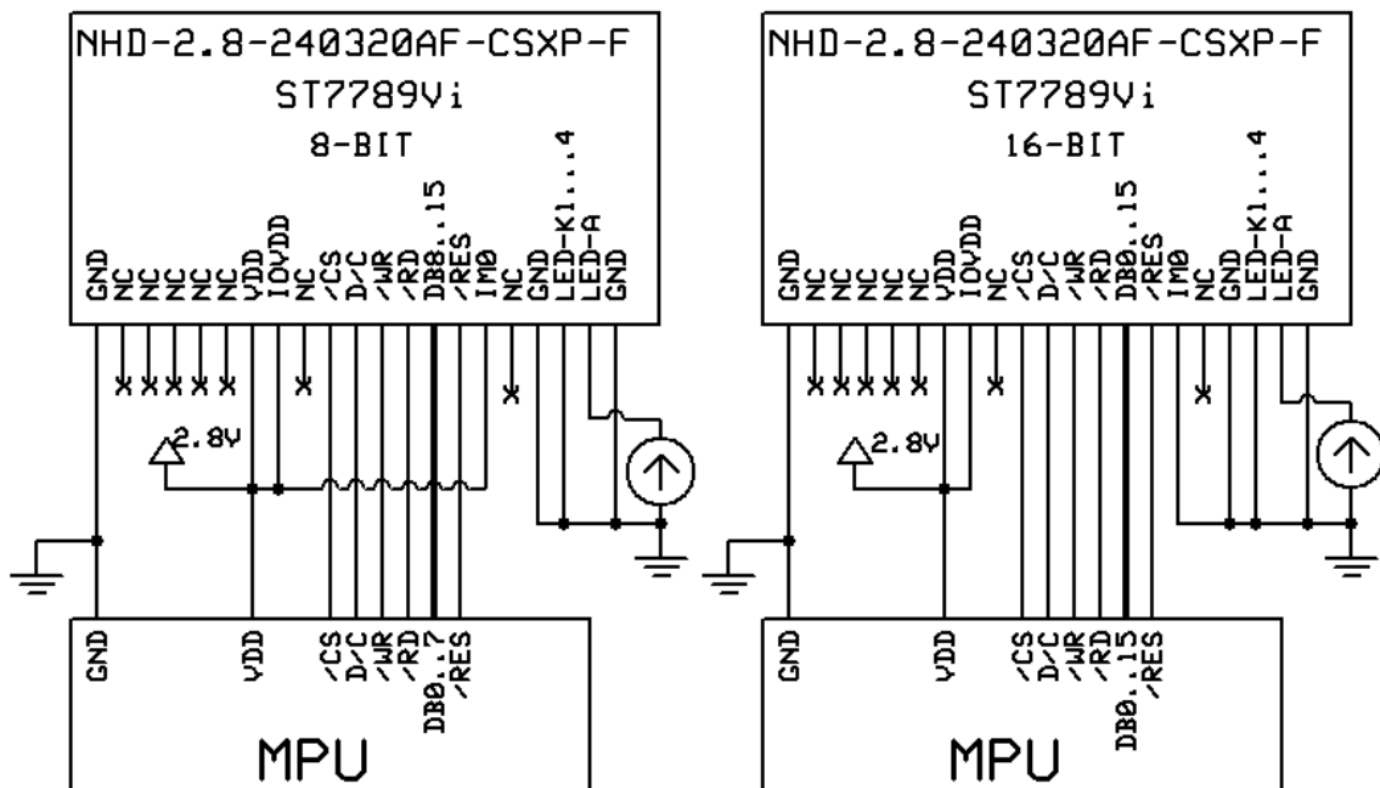

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T _{OP}	Absolute Max	-20	-	+70	°C
Storage Temperature Range	T _{ST}	Absolute Max	-30	-	+80	°C
Supply Voltage for LCD	V _{DD}	-	2.4	3.3	3.6	V
Supply Voltage for Logic	IOV _{DD}	-	1.65	1.8	3.3	V
Supply Current	I _{DD}	V _{DD} = 3.3V	3	8	15	mA
"H" Level input	V _{IH}	-	0.7 * V _{DDI}	-	V _{DDI}	V
"L" Level input	V _{IL}	-	GND	-	0.3 * V _{DDI}	V
"H" Level output	V _{OH}	-	0.8 * V _{DDI}	-	V _{DD}	V
"L" Level output	V _{OL}	-	GND	-	0.2 * V _{DDI}	V
Backlight Supply Current	I _{LED}	-	-	160	-	mA
Backlight Supply Voltage	V _{LED}	I _{LED} = 160 mA	2.8	3.1	3.4	V
Backlight Lifetime*	-	I _{LED} = 160mA T _{OP} = 25°C	20,000	-	-	Hrs.

*Backlight Lifetime is rated as Hours until **half-brightness**, under normal operating conditions. The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated.

Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Optimal Viewing Angles	Top	φY+	CR ≥ 10	-	80	-	°
	Bottom	φY-		-	80	-	°
	Left	θX-		-	80	-	°
	Right	θX-		-	80	-	°
Contrast Ratio		CR	-	600	800	-	-
Luminance		L _V	I _{LED} = 160 mA	800	1000	-	cd/m ²
Response Time		T _R + T _F	T _{OP} = 25°C	-	30	40	ms
Chromaticity	Red	X _R	-	0.58	0.62	0.66	-
		Y _R	-	0.29	0.33	0.37	-
	Green	X _G	-	0.26	0.30	0.34	-
		Y _G	-	0.56	0.60	0.64	-
	Blue	X _B	-	0.11	0.15	0.19	-
		Y _B	-	0.01	0.05	0.09	-
	White	X _W	-	0.23	0.27	0.31	-
		Y _W	-	0.24	0.28	0.32	-

Controller Information

Built-in ST7789VI Controller: <https://support.newhavendisplay.com/hc/en-us/articles/10814990300823-ST7789VI>


Table of Commands

Please download specification at: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/ST7789V.pdf>




Timing Characteristics for TFT

Parallel 8/16-bit Interface Timing Characteristics (8080-II system)

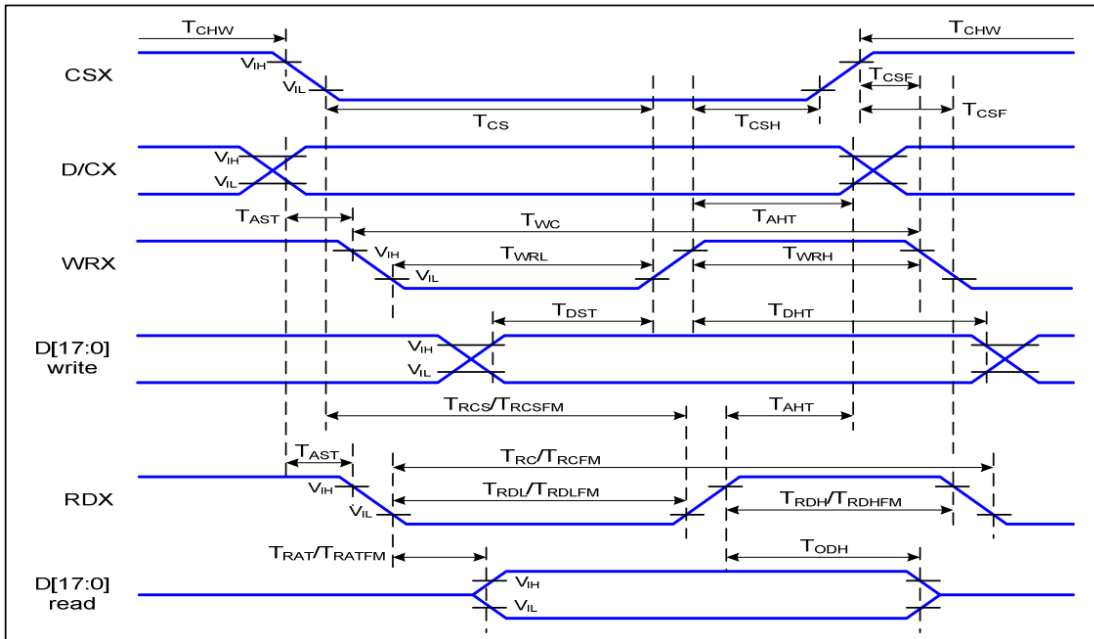


Signal	Symbol	Parameter	Min	Max	Unit	Description
D/CX	T_{AST}	Address setup time	0		ns	-
	T_{AHT}	Address hold time (Write/Read)	10		ns	
CSX	T_{CHW}	Chip select "H" pulse width	0		ns	-
	T_{CS}	Chip select setup time (Write)	15		ns	
	T_{RCS}	Chip select setup time (Read ID)	45		ns	
	T_{RCSFM}	Chip select setup time (Read FM)	355		ns	
	T_{CSF}	Chip select wait time (Write/Read)	10		ns	
	T_{CSH}	Chip select hold time	10		ns	
WRX	T_{WC}	Write cycle	66		ns	
	T_{WRH}	Control pulse "H" duration	15		ns	
	T_{WRL}	Control pulse "L" duration	15		ns	
RDX (ID)	T_{RC}	Read cycle (ID)	160		ns	When read ID data
	T_{RDH}	Control pulse "H" duration (ID)	90		ns	
	T_{RDL}	Control pulse "L" duration (ID)	45		ns	
RDX (FM)	T_{RCFM}	Read cycle (FM)	450		ns	When read from frame memory
	T_{RDHFM}	Control pulse "H" duration (FM)	90		ns	
	T_{RDLFM}	Control pulse "L" duration (FM)	355		ns	
D[17:0]	T_{DST}	Data setup time	10		ns	For CL=30pF
	T_{DHT}	Data hold time	10		ns	
	T_{RAT}	Read access time (ID)		40	ns	
	T_{RATFM}	Read access time (FM)		340	ns	
	T_{ODH}	Output disable time	20	80	ns	

3-wire SPI

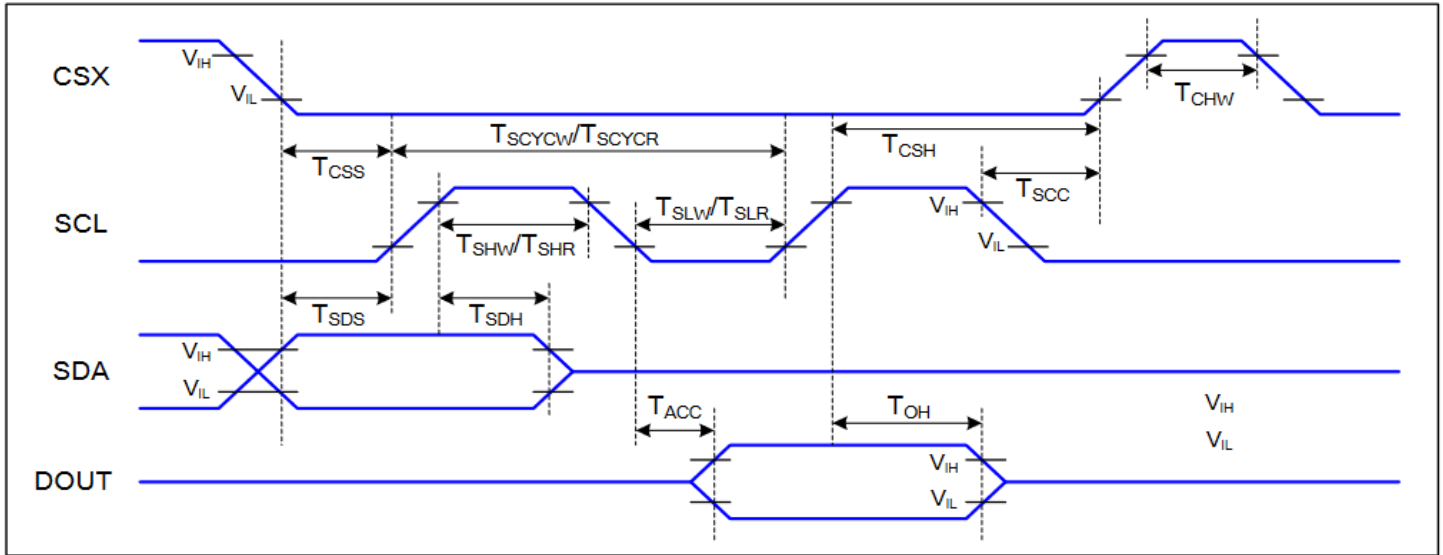


Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	15		ns	
	T_{CSH}	Chip select hold time (write)	15		ns	
	T_{CSS}	Chip select setup time (read)	60		ns	
	T_{SCC}	Chip select hold time (read)	65		ns	
	T_{CHW}	Chip select "H" pulse width	40		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	16		ns	
	T_{SHW}	SCL "H" pulse width (Write)	7		ns	
	T_{SLW}	SCL "L" pulse width (Write)	7		ns	
	T_{SCYCR}	Serial clock cycle (Read)	150		ns	
	T_{SHR}	SCL "H" pulse width (Read)	60		ns	
	T_{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T_{SDS}	Data setup time	7		ns	
	T_{SDH}	Data hold time	7		ns	
DOUT	T_{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T_{OH}	Output disable time	15	50	ns	For minimum CL=8pF

4-wire SPI

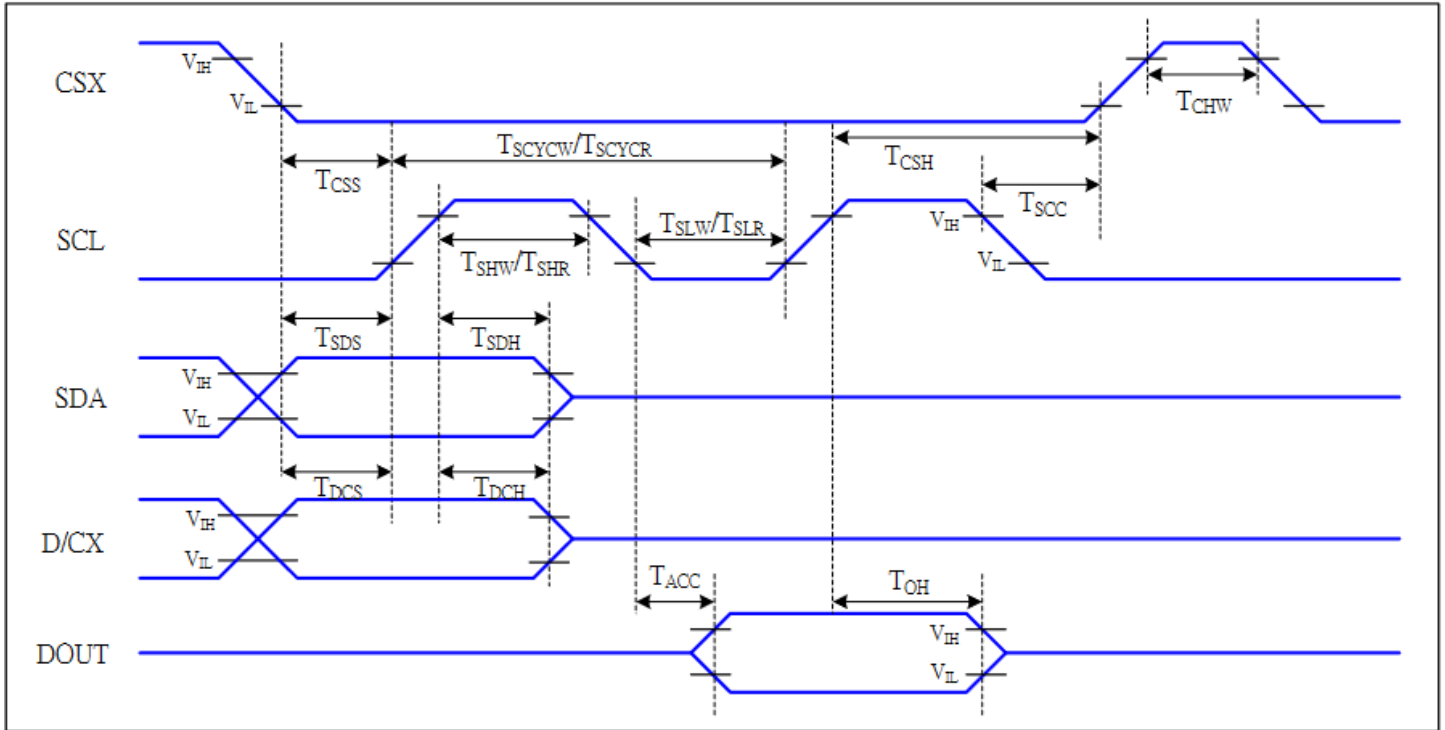


Signal	Symbol	Parameter	MIN	MAX	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	15		ns	
	T_{CSH}	Chip select hold time (write)	15		ns	
	T_{CSS}	Chip select setup time (read)	60		ns	
	T_{SCC}	Chip select hold time (read)	65		ns	
	T_{CHW}	Chip select "H" pulse width	40		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	16		ns	-write command & data ram
	T_{SHW}	SCL "H" pulse width (Write)	7		ns	
	T_{SLW}	SCL "L" pulse width (Write)	7		ns	
	T_{SCYCR}	Serial clock cycle (Read)	150		ns	-read command & data ram
	T_{SHR}	SCL "H" pulse width (Read)	60		ns	
	T_{SLR}	SCL "L" pulse width (Read)	60		ns	
D/CX	T_{DCS}	D/CX setup time	10		ns	
	T_{DCH}	D/CX hold time	10		ns	
SDA (DIN)	T_{SDS}	Data setup time	7		ns	
	T_{SDH}	Data hold time	7		ns	
DOUT	T_{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T_{OH}	Output disable time	15	50	ns	For minimum CL=8pF

Reset Timing

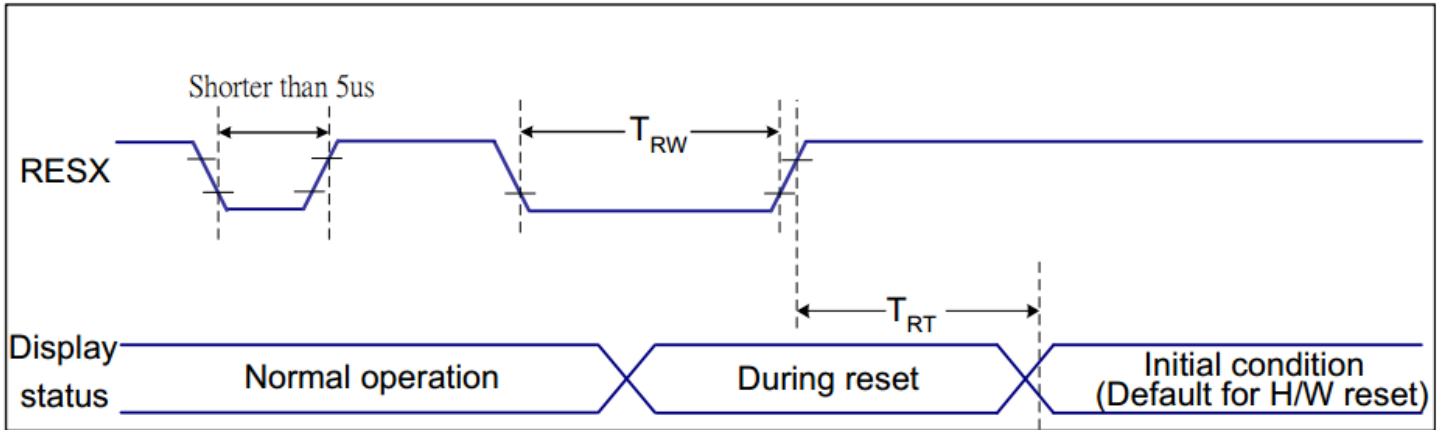

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120 (Note 1, 6, 7)	ms

Power ON/OFF Sequence

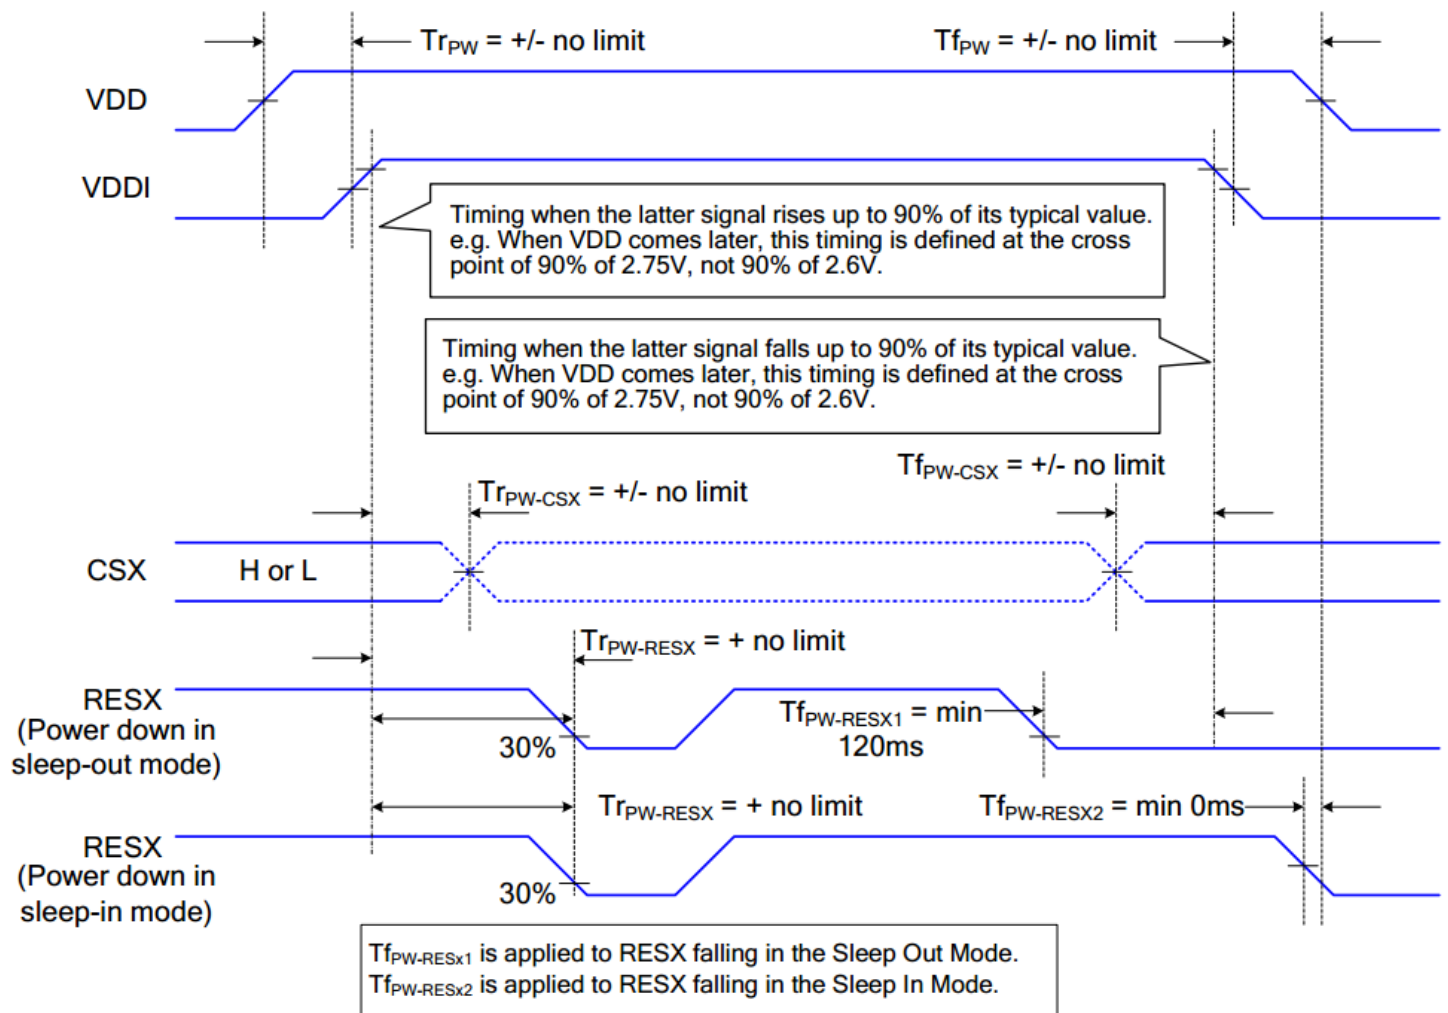

Example Initialization Code

```

/*****/
void TFT_28_7789_Write_Command(unsigned int command)
{
  GPIO_ResetBits(GPIOC, CS1);
  GPIO_ResetBits(GPIOC, RS);
  GPIO_SetBits(GPIOC, nRD);
  GPIO_ResetBits(GPIOC, nWR);
  GPIO_Write(GPIOB, command);
  TFT_delay(10);
  GPIO_SetBits(GPIOC, nWR);
  TFT_delay(1);
}
/*****/
void TFT_28_7789_Write_Data(unsigned int data1)
{
  GPIO_Write(GPIOB, data1);
  GPIO_SetBits(GPIOC, RS);
  GPIO_ResetBits(GPIOC, nWR);
  TFT_delay(1);
  GPIO_SetBits(GPIOC, nWR);
}
/*****/
void TFT_28_7789_Init(void)
{
  GPIO_ResetBits(GPIOC, CS1);
  GPIO_SetBits(GPIOC, nRD);
  GPIO_ResetBits(GPIOC, nWR);
  GPIO_WriteBit(GPIOC, RES, Bit_RESET);
  TFT_delay(100);
  GPIO_WriteBit(GPIOC, RES, Bit_SET);
  TFT_delay(100);
  TFT_28_7789_Write_Command(0x0011); //exit SLEEP mode
  TFT_delay(100);

  TFT_28_7789_Write_Command(0x0036);
  TFT_28_7789_Write_Data(0x0080); //MADCTL: memory data access control
  TFT_28_7789_Write_Command(0x003A);
  TFT_28_7789_Write_Data(0x0066); //COLMOD: Interface Pixel format
  TFT_28_7789_Write_Command(0x0021); //INVON: Display Inversion ON (setting for IPS)
  TFT_28_7789_Write_Command(0x00B2);
  TFT_28_7789_Write_Data(0x000C);
  TFT_28_7789_Write_Data(0x0C);
  TFT_28_7789_Write_Data(0x00);
  TFT_28_7789_Write_Data(0x33);
  TFT_28_7789_Write_Data(0x33); //PORCTR: Porch setting
  TFT_28_7789_Write_Command(0x00B7);
  TFT_28_7789_Write_Data(0x0035); //GCTRL: Gate Control
  TFT_28_7789_Write_Command(0x00BB);
  TFT_28_7789_Write_Data(0x002B); //VCOMS: VCOM setting
  TFT_28_7789_Write_Command(0x00C0);
  TFT_28_7789_Write_Data(0x002C); //LCMCTRL: LCM Control
  TFT_28_7789_Write_Command(0x00C2);
  TFT_28_7789_Write_Data(0x0001);
  TFT_28_7789_Write_Data(0xFF); //VDVVRHEN: VDV and VRH Command Enable
  TFT_28_7789_Write_Command(0x00C3);
  TFT_28_7789_Write_Data(0x0011); //VRHS: VRH Set
  TFT_28_7789_Write_Command(0x00C4);
  TFT_28_7789_Write_Data(0x0020); //VDVS: VDV Set

```



```
TFT_28_7789_Write_Command(0x00C6);
TFT_28_7789_Write_Data(0x000F); //FRCTRL2: Frame Rate control in normal mode
TFT_28_7789_Write_Command(0x00D0);
TFT_28_7789_Write_Data(0x00A4);
TFT_28_7789_Write_Data(0xA1); //PWCTRL1: Power Control 1
TFT_28_7789_Write_Command(0x00E0);
TFT_28_7789_Write_Data(0x00D0);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0005);
TFT_28_7789_Write_Data(0x000E);
TFT_28_7789_Write_Data(0x0015);
TFT_28_7789_Write_Data(0x000D);
TFT_28_7789_Write_Data(0x0037);
TFT_28_7789_Write_Data(0x0043);
TFT_28_7789_Write_Data(0x0047);
TFT_28_7789_Write_Data(0x0009);
TFT_28_7789_Write_Data(0x0015);
TFT_28_7789_Write_Data(0x0012);
TFT_28_7789_Write_Data(0x0016);
TFT_28_7789_Write_Data(0x0019); //PVGAMCTRL: Positive Voltage Gamma control
TFT_28_7789_Write_Command(0x00E1);
TFT_28_7789_Write_Data(0x00D0);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0005);
TFT_28_7789_Write_Data(0x000D);
TFT_28_7789_Write_Data(0x000C);
TFT_28_7789_Write_Data(0x0006);
TFT_28_7789_Write_Data(0x002D);
TFT_28_7789_Write_Data(0x0044);
TFT_28_7789_Write_Data(0x0040);
TFT_28_7789_Write_Data(0x000E);
TFT_28_7789_Write_Data(0x001C);
TFT_28_7789_Write_Data(0x0018);
TFT_28_7789_Write_Data(0x0016);
TFT_28_7789_Write_Data(0x0019); //NVGAMCTRL: Negative Voltage Gamma control
TFT_28_7789_Write_Command(0x002A);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x00EF); //X address set
TFT_28_7789_Write_Command(0x002B);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0000);
TFT_28_7789_Write_Data(0x0001);
TFT_28_7789_Write_Data(0x003F); //Y address set

TFT_delay(10);
}
/*****/
```

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature Storage	Endurance test applying the high storage temperature for a long time.	+80°C, 240hrs	2
Low Temperature Storage	Endurance test applying the low storage temperature for a long time.	-30°C, 240hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C, 120hrs	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C, 120hrs	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+50°C, 90% RH, 120hrs	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-30°C 30min -> 25°C 10min -> 80°C 30min = 1 cycle. For 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	Frequency: 250 r/min Amplitude: 1 inch Time: 45min	3
Static electricity test	Endurance test applying electric static discharge.	Air discharge: ±8kV 10 Times Contact discharge: ±4kV 10 Times	

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.